
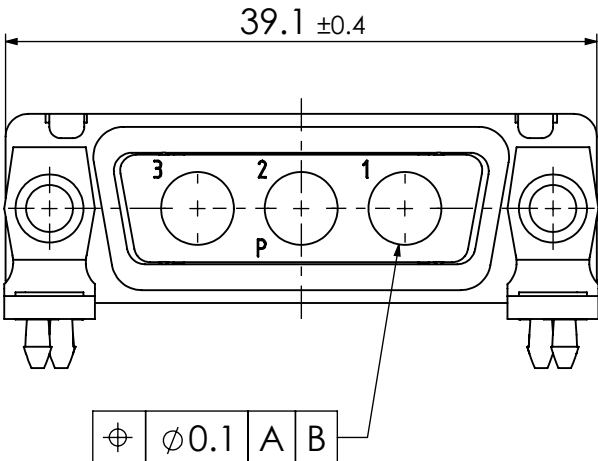
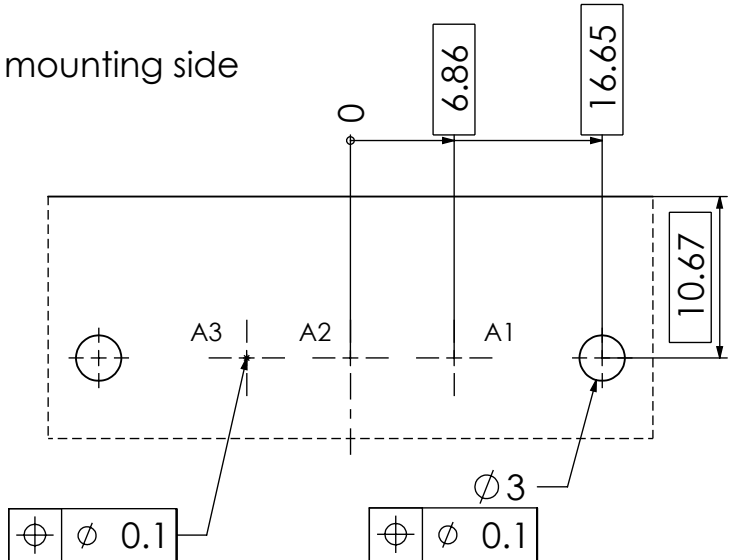
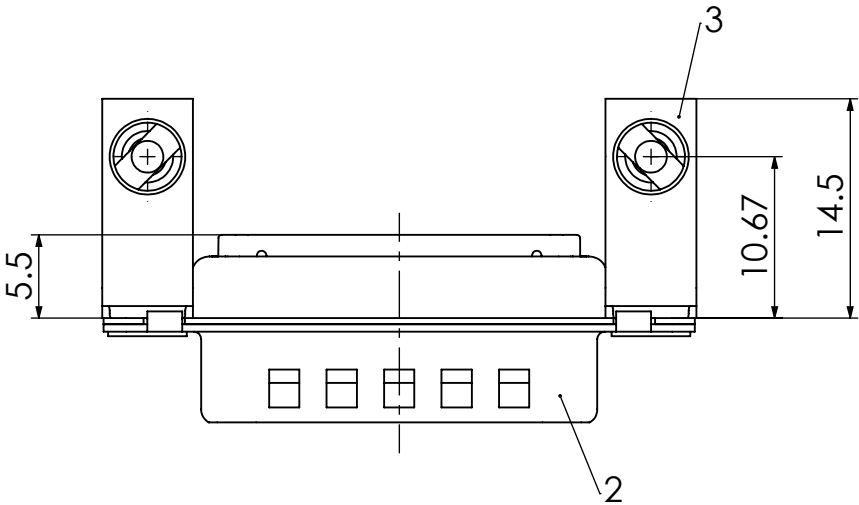
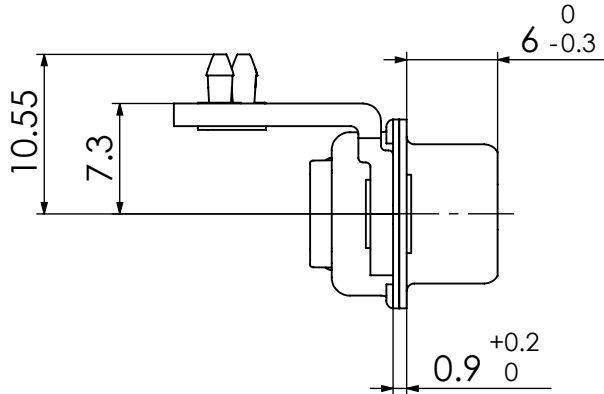


RoHS compliant by exemption

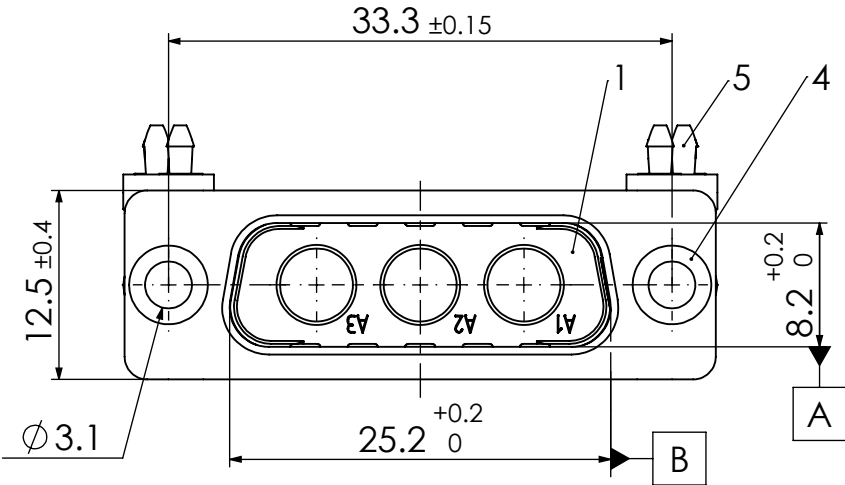

5	2	Snap-in rivet	PCB 1.6mm / Brass	tin plated
4	2	Bushing	MW / Steel	tin plated
3	2	Bracket	F1080-13B / Steel	tin plated
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
<i>No.</i>	<i>St.</i>	<i>Part</i>	<i>Type Description/Material</i>	<i>Surface plating/Colour/Class</i>

FUNCTIONAL SYMBOLS F = 0 F = 0 F = 0		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
		DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m				molex FCT D-Sub Mixed-Layout Connector					
						CURRENT REVISION									
						DRWN: DRAWN BY mteubel 07-12-2023 APPR: APPR BY msteinbrueck 03-01-2024									
										PRODUCT CUSTOMER DRAWING					
		2 24410		INITIAL REVISION				MATERIAL NUMBER						REV	
		1		DRWN: DRAWN BY cschoening 08-03-2006 APPR: APPR BY sschref 09-03-2006				1731070272						2	
		REV. CH.-NO.													
		REPLACEMENT FOR: 1731070272_Rev.A1		FRIST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER FM3W3P-0220				CUSTOMER GENERAL MARKET		SH NUM 1	

COMMENT: