

DESCRIPTION

The EV2661-C-00A is an evaluation board for the MP2661, a highly-integrated single-cell Li-Ion/Li-Polymer battery charger with system power path management, targeted at space limited portable applications. It takes input power from either an AC adapter or a USB port to supply the system load and charge the battery independently. The charger section features trickle charge, constant current (CC) and constant voltage (CV) regulation, charge termination and charge status.

EV2661 ensures the continuous power to the system by automatically selecting the input, the battery or both to power the system.

EV2661 provides system short circuit protection to prevent the Li-Ion battery from being damaged due to excessive high current.

EV2661 cuts off the path between battery and system when battery UVLO to prevent the Li-Ion battery from being overly discharged.

Through the I2C connector on EV2661, the customer can program the charging parameters, such as: input current limit, input voltage regulation limit, charging current, battery regulation voltage, and battery UVLO.

ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Units
Input Voltage	V_{IN}	4.6 - 5.5	V
Battery Voltage	V_{BATT}	3.60 - 4.545	V
Input Current Limit	I_{IN} Limit	85 - 455	mA
V_{IN} Regulation Voltage	V_{IN} Limit	$V_{BATT}+400mV$	V
Charge Current	I_{CHG}	8 - 535	mA
Discharge Current	I_{DSG}	400 - 3200	mA

FEATURES

- Fully Autonomous Charger for Single-Cell Li-Ion/Polymer Batteries
- Current Limit for USB Port
- Complete Power Path Management for Simultaneously Powering the System and Charging the Battery
- 0.5% Charging Voltage Accuracy
- 12V Maximum Voltage for the Input Source
- I²C Interface for Setting charging Parameters and Status Reporting
- Robust Charging Protection Including Battery Temperature Monitor and Programmable Timer
- Battery Disconnection Function

APPLICATIONS

- Wearable devices
- Smart Handheld Devices
- Fitness Accessories
- Smart Watches

All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.

EV2661-C-00A EVALUATION BOARD




(L x W x H) 2.5" x2.5"x 0.063"
(6.35cm x 6.35cm x 0.16cm)

Board Number	MPS IC Number
EV2661-C-00A	MP2661GC-xxxx*

*: "xxxx" is the register setting option. The factory default is "0000". This content can be viewed in I²C register map. For customer options, please contact an MPS FAE to obtain a "XXXX" value.

EVALUATION BOARD SCHEMATIC

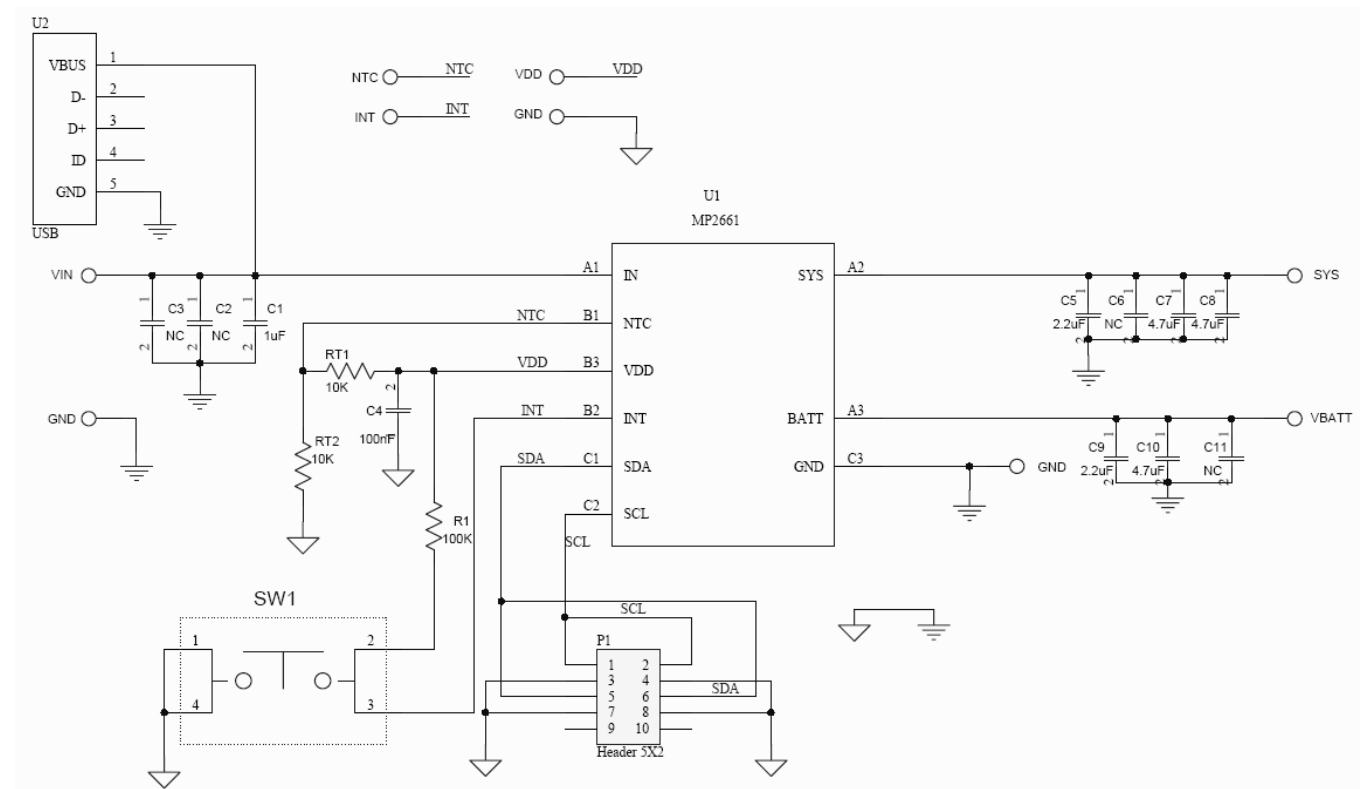

EV2661-C-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Part Number
1	C1	1μF	Ceramic Cap;25V; X7R;0603;	0603	muRata	GRM188R71E105KA12D
2	C5, C9	2.2μF	Ceramic Cap;25V; X7R;0805;	0805	muRata	GRM21BR71E225KA73L
1	C2	NC	Ceramic Cap;25V; X7R;0805;	0805	muRata	GRM21BR71E225KA73L
3	C7, C8, C10	4.7μF	Ceramic Cap;25V; X7R;1206	1206	muRata	GRM31CR71E475KA88L
1	C4	100nF	Ceramic Cap;25V; X7R;0805;	0805	HHEC	C0805X104K025T
1	C6	NC	Ceramic Cap;25V; X7R;0805;	0805	muRata	GRM21BR71E225KA73L
2	C3, C11	NC	Ceramic Cap;25V; X7R;1206	1206	muRata	GRM31CR71E475KA88L
1	P1		Header, 5-Pin, Dual row			
1	R1	100k	Film Resistor;1%;	0603	Yageo	RC0603FR-07100KL
2	RT1, RT2	10k	Film Resistor;1%;	0603	Yageo	RC0603FR-0710KL
1	U2		Micro-B USB connector;			
1	U1	IC	MP2661GC-0000	WCSP 1.55mm* 1.55mm	MPS	MP2661GC-0000

PRINTED CIRCUIT BOARD LAYOUT

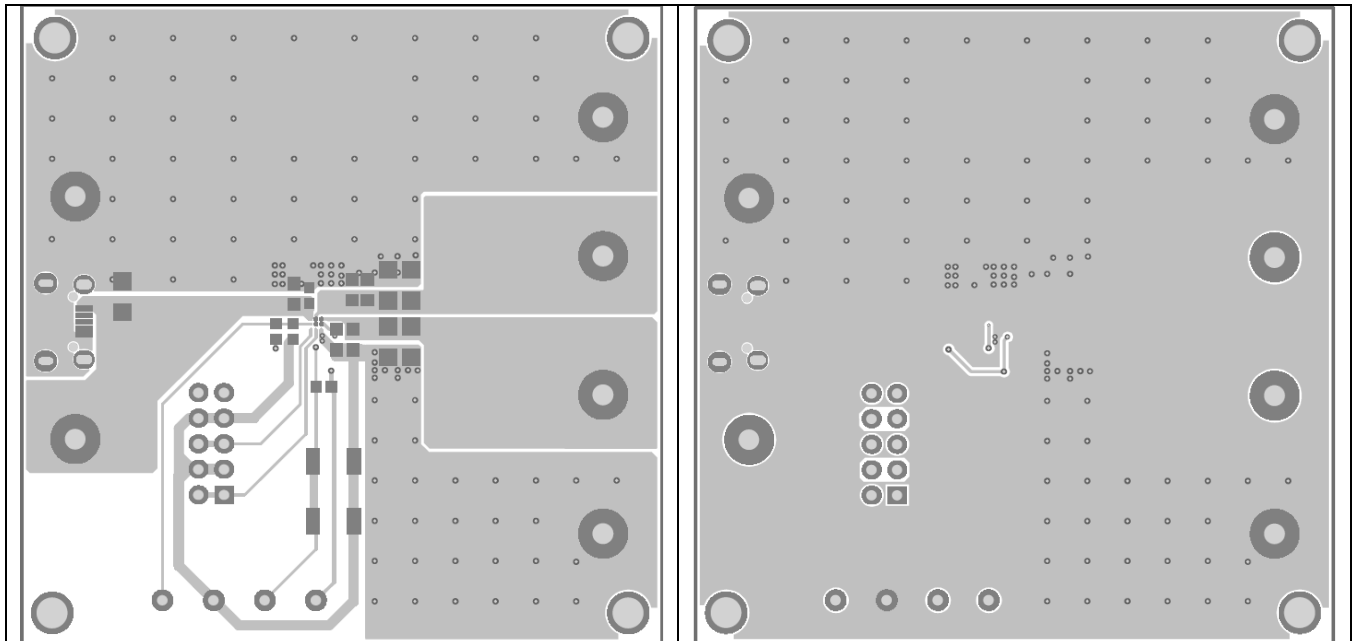


Figure1 Top Layer

Figure2 Bottom Layer

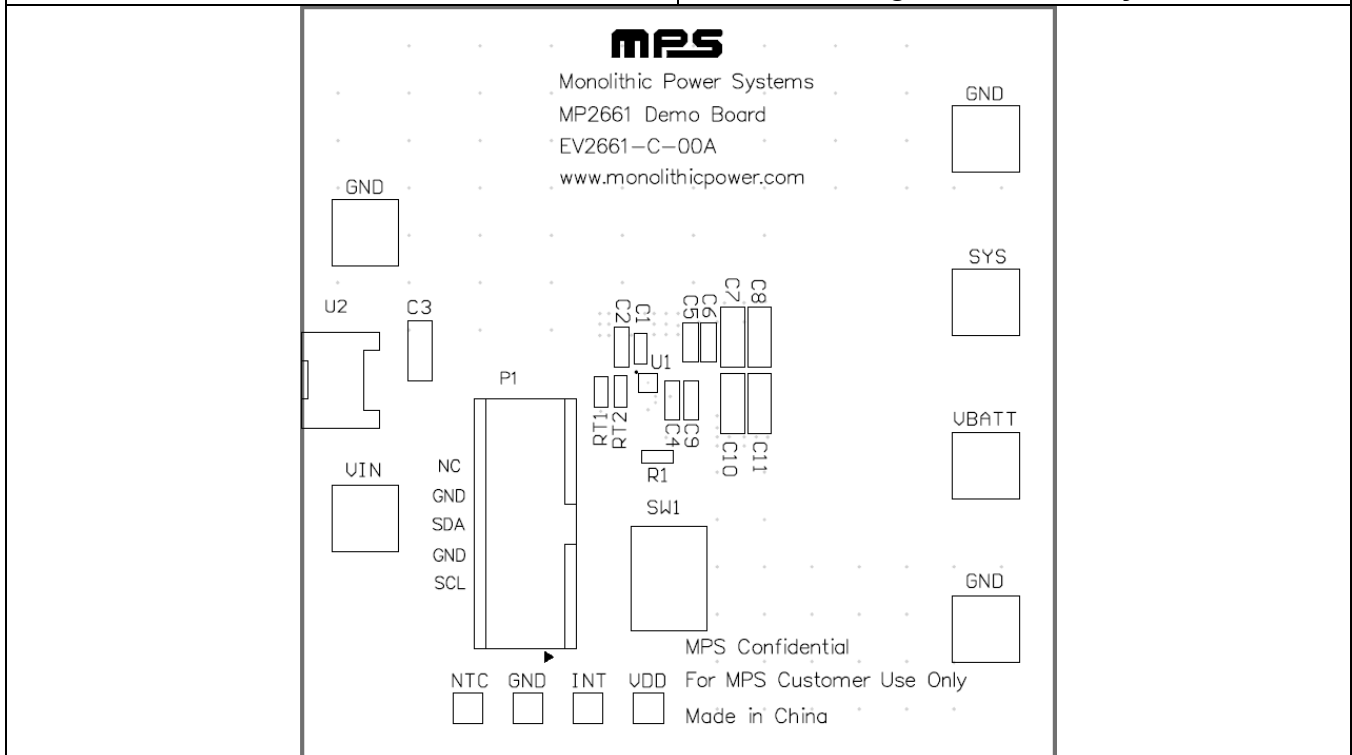


Figure3 Top Silk Layer

QUICK START GUIDE

This board is designed for MP2661 which is a highly-integrated single-cell Li-Ion/Li-Polymer battery charger with system power path management function. And layout accommodates most commonly used capacitors. The default function of this board is preset for charger mode and the charge full voltage is preset to 4.200V for 1 cell Li-Ion battery.

Evaluation Platform Preparation:

1) USB-to-I²C Communication Kit

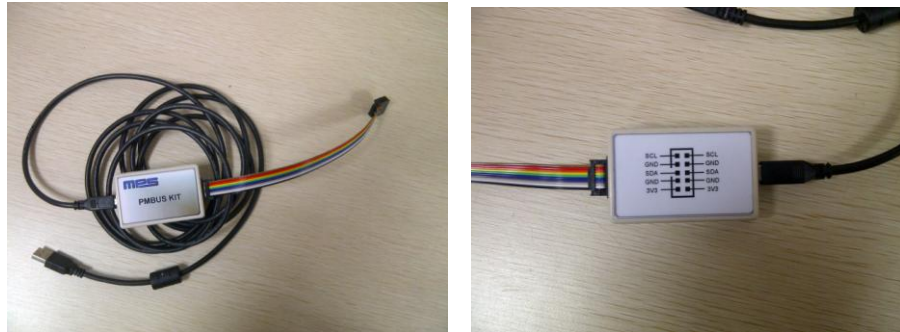


Figure4 USB-to-I²C Communication Kit

2) Software - double-click on the MP2661 Evaluation Kit_R0.6.EXE file and open the software. The software supports the Windows® XP operating systems.



3) A computer with at least one USB port and a USB cable. The MP2661 evaluation software must be properly installed.

4) Original Test Setup for MP2661 in Figure5

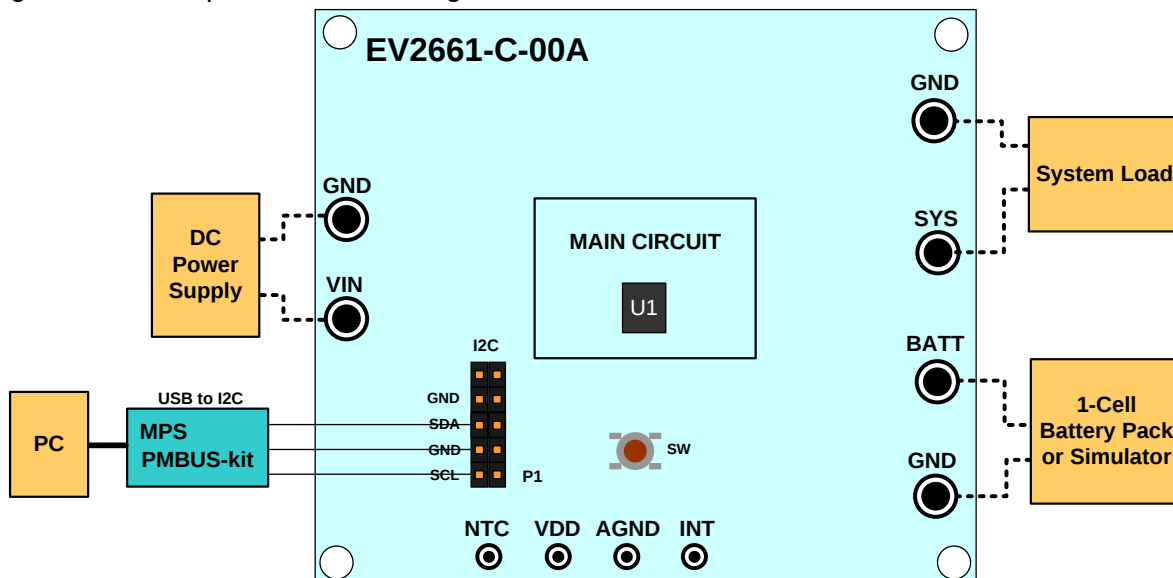


Figure5 Test Setup for MP2661

5) Turn on the computer. Launch the MP2661 evaluation software. The main window of the software is shown in Figure 6.

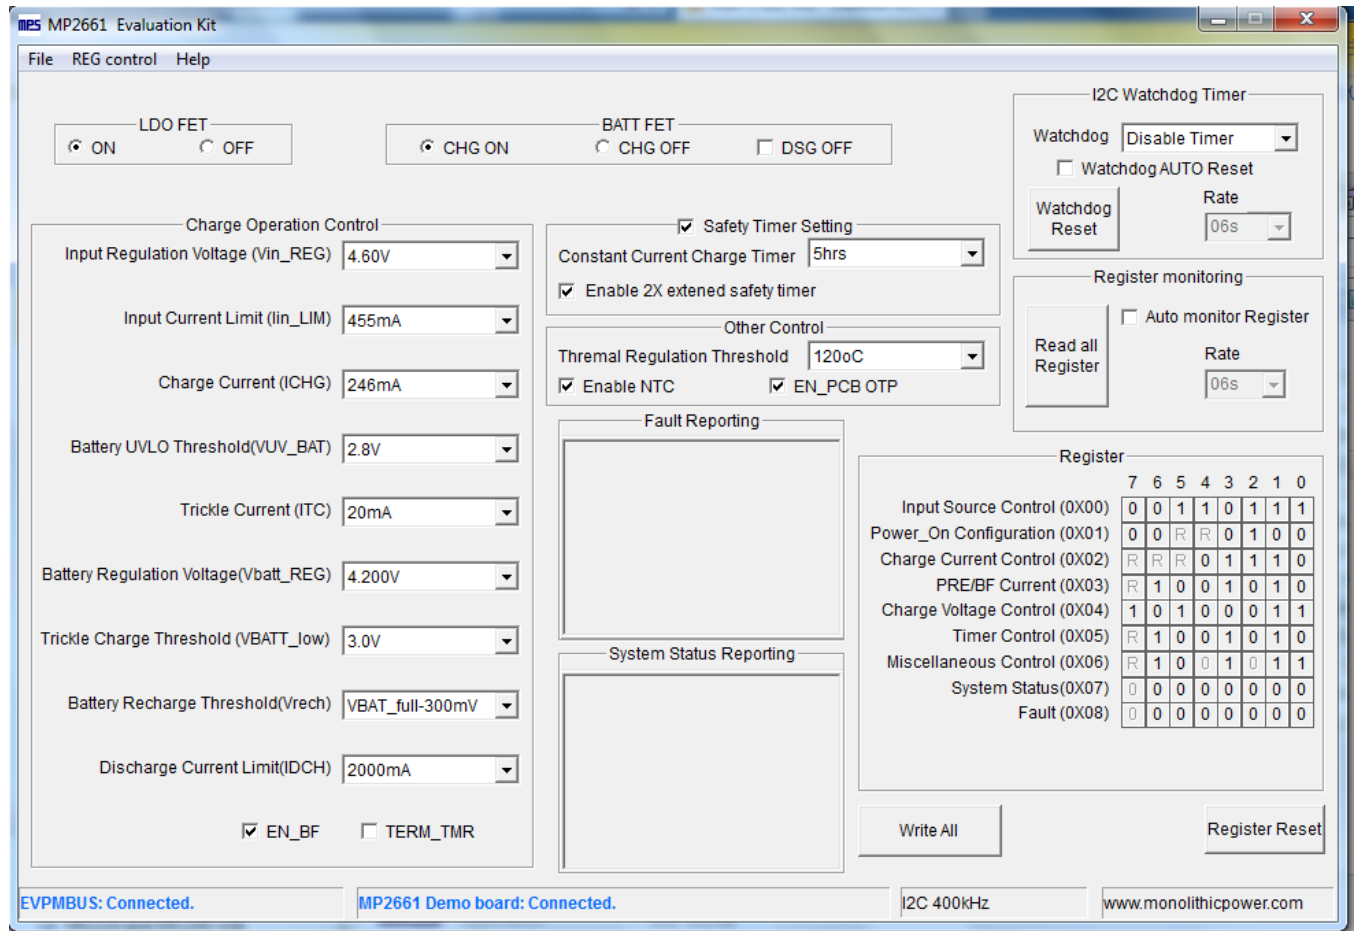


Figure6 MP2661evaluation software

Procedure

Make sure all the connections are normal -- the EVPMBUS connected and EV2661-C-00A connected. It is ready to run the program!

Charger Function

Charge Operation Control

Input Regulation Voltage (Vin_REG)

4.60V

Input Current Limit (Iin_LIM)

455mA

Charge Current (ICHG)

246mA

Battery UVLO Threshold(VUV_BAT)

2.8V

Trickle Current (ITC)

20mA

Battery Regulation Voltage(Vbatt_REG)

4.200V

Trickle Charge Threshold (VBATT_low)

3.0V

Battery Recharge Threshold(Vrech)

VBAT_full-200mV

charge Current Limit(IDCH)

2000mA

☒ EN_BF

☐ TERM_TMR

1. Set Input Voltage Regulation at 4.60 V (the range is 3.88 - 5.08V)

Input Regulation Voltage (Vin_REG)

4.60V

4.36V

4.44V

4.52V

4.60V

4.68V

4.76V

4.84V

2. Set Input Current Limit to 455 mA (the range is 85 – 455mA)

Input Current Limit (Iin_LIM)	455mA
	130mA
	175mA
	220mA
	265mA
	310mA
	355mA
	455mA

3. Set Constant Charge Current, ICHG to 246 mA (the range is 8 – 535mA)

Charge Current (ICHG)	246mA
	195mA
	212mA
	229mA
	246mA
	263mA
	280mA
	297mA
	314mA
	331mA
	348mA
	365mA

4. Set BATT UVLO threshold to 2.8V (the range is 2.4 – 3.1V)

Battery UVLO Threshold(VUV_BATT)	2.8V
	2.7V
	2.8V
	2.9V
	3.0V
	3.1V

5. Set Trickle Current to 20 mA (the range is 6 – 27mA)

Trickle Current (ITC)	20mA
	6mA
	13mA
	20mA
	27mA

6. Set Charge Full Voltage to 4.200 V (the range is 3.6 - 4.545V)

Battery Regulation Voltage(Vbatt_REG) 4.200V

- 4.125V
- 4.140V
- 4.155V
- 4.170V
- 4.185V
- 4.200V**
- 4.215V
- 4.230V
- 4.245V
- 4.260V
- 4.275V

7. Set Trickle - Charge to CC Charge Threshold Voltage to 3.0 V (the range is 2.8 – 3.0V)

Trickle Charge Threshold (VBATT_low) 3.0V

- 2.8V
- 3.0V**

8. Set Battery auto recharge Voltage to VBATT_Full – 300mV (the range is 150mV or 300mV)

Battery Recharge Threshold(Vrech) VBAT_full-300mV

- VBAT_full-150mV
- VBAT_full-300mV**

9. Set battery discharge current limit to 2A (the range is 400mA to 3200mA):

Discharge Current Limit(IDCH) 2000mA

- 1800mA
- 2000mA**
- 2200mA
- 2400mA
- 2600mA

10. Termination Function Select

☒ EN_BF ☐ TERM_TMR

Table 1 Termination Function Selection Table

EN_BF	TERM_TMR	After I_{BATT} hit I_{BF} in CV mode	
		Operation	Charge Status
☐	x	Keep CV Charge	Charge
☒	☐	Charge Done	Charge Done
☒	☒	Keep CV Charge	Charge Done

Others

1. LDO FET Control:

LDO_FET

☒ ON
☐ OFF

This bit only controls the on/off of the LDO FET.

2. BATT FET Control:

BATT FET

☒ CHG ON
☐ CHG OFF
☐ DSG OFF

CHG ON and CHG OFF only control the on/off of the Battery FET in charge mode.

DSG OFF selected could turn off the Battery FET at both charge and discharge mode.

DSG OFF unselected could not turn on Battery FET; pull INT to low by push button could turn on Battery FET when it's turned off by DSG OFF.

3. Other Control.

Other Control

Thermal Regulation Threshold

120oC

☒ Enable NTC
☒ EN_PCB OTP

Above setting enables PCB OTP; for other application, please refer to the table below.

Table 2 NTC Function Selection Table

Enable NTC	EN_PCB OTP	Function
☐	x	Disable
☒	☐	NTC
☒	☒	PCB OTP

4. Safety Timer Setting

☒ Safety Timer Setting

Constant Current Charge Timer

5hrs

☐ Enable 2X extened safety timer

5. I²C Watchdog Timer

I2C Watchdog Timer

Watchdog

Disable Timer

☐ Watchdog AUTO Reset

Watchdog
Reset

Rate

04s

6. Resister Auto Monitor

Register monitoring

☐ Auto monitor Register

Read all Register

Rate
04s

7. Content of the Registers:

Register	7	6	5	4	3	2	1	0
Input Source Control (0X00)	0	0	1	1	0	1	1	1
Power_On Configuration (0X01)	0	0	R	R	0	1	0	0
Charge Current Control (0X02)	R	R	R	0	1	1	1	0
PRE/BF Current (0X03)	R	1	0	0	1	0	1	0
Charge Voltage Control (0X04)	1	0	1	0	0	0	1	1
Timer Control (0X05)	R	1	0	0	1	0	1	0
Miscellaneous Control (0X06)	R	1	0	0	1	0	1	1
System Status(0X07)	0	0	0	0	0	0	0	0
Fault (0X08)	0	0	0	0	0	0	0	0

8. Monitor the MP2661 operation status and Fault report

Fault Reporting

System Satus Reporting

❖Notes❖

- For the other detailed description on the operation of this part, please contact local FAE to apply the latest datasheet

NOTICE: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.