

Photomicrosensor (Transmissive)

EE-SX1105

Compact Slot/Terminal Type (Slot Width: 2 mm)


- Low profile (Height: 3.3 mm) type
- Terminal for PCB mounting



Be sure to read *Safety Precautions* on Page 3.

Ordering Information

Photomicrosensor

Appearance	Sensing method	Connecting method	Sensing distance	Aperture size (H x W) (mm)	Output type	Model	Minimum packing unit (Unit: pcs)
	Transmissive (slot type)	Terminal for PCB mounting	2 mm (Slot width)	Both emitting side and detecting side 1 x 0.4	Phototransistor	EE-SX1105	1

Note: Order in multiples of minimum packing unit.

Ratings, Characteristics and Exterior Specifications

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rated value	Unit
Emitter			
Forward current	I_F	50*1	mA
Pulse forward current	I_{FP}	—	A
Reverse voltage	V_R	5	V
Detector			
Collector-Emitter voltage	V_{CEO}	30	V
Emitter-Collector voltage	V_{ECO}	4.5	V
Collector current	I_C	30	mA
Collector dissipation	P_C	80*1	mW
Operating temperature	T_{opr}	-25 to 85	°C
Storage temperature	T_{stg}	-30 to 85	°C
Soldering temperature	T_{sol}	260*2	°C

*1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C.

*2. Complete soldering within 3 seconds.

Exterior Specifications

Connecting method	Weight (g)	Material	
		Case	Lens
Terminal for PCB mounting	0.1	PPS	Epoxy resin

Electrical and Optical Characteristics (Ta = 25°C)

Item	Symbol	Value			Unit	Condition	
		MIN.	TYP.	MAX.			
Emitter							
	Forward voltage	V _F	—	1.3	1.6	V	I _F = 50 mA
	Reverse current	I _R	—	—	10	μA	V _R = 5 V
	Peak emission wavelength	λ _P	—	950	—	nm	I _F = 50 mA
Detector							
	Light current	I _L	0.2	—	—	mA	I _F = 20 mA, V _{CE} = 5 V
	Dark current	I _D	—	—	500	nA	V _{CE} = 10 V, 0 lx
	Leakage current	I _{LEAK}	—	—	—	μA	—
	Collector-Emitter saturated voltage	V _{CE} (sat)	—	—	0.4	V	I _F = 20 mA, I _L = 0.1 mA
	Peak spectral sensitivity wavelength	λ _P	—	800	—	nm	V _{CE} = 5 V
Rising time		t _r	—	10	—	μs	V _{CC} = 5 V, R _L = 100 Ω I _F = 20 mA
Falling time		t _f	—	10	—	μs	V _{CC} = 5 V, R _L = 100 Ω I _F = 20 mA

Engineering Data (Reference Value)

Fig 1. Forward Current vs. Collector Dissipation Temperature Rating

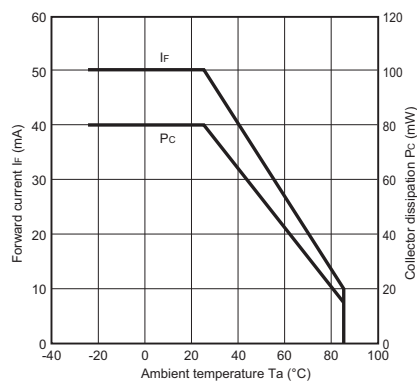


Fig 2. Forward Current vs. Forward Voltage Characteristics (Typical)

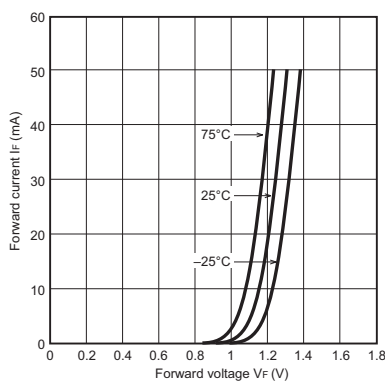


Fig 3. Light Current vs. Forward Current Characteristics (Typical)

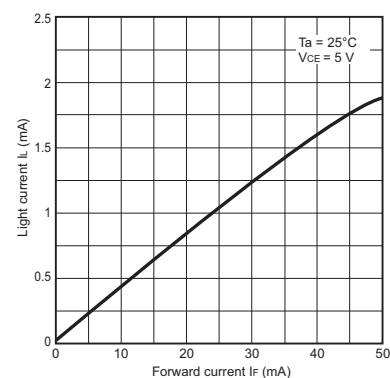


Fig 4. Light Current vs. Collector-Emitter Voltage Characteristics (Typical)

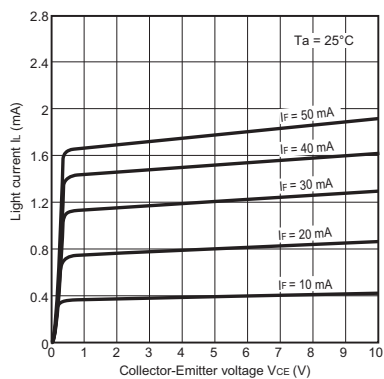


Fig 5. Relative Light Current vs. Ambient Temperature Characteristics (Typical)

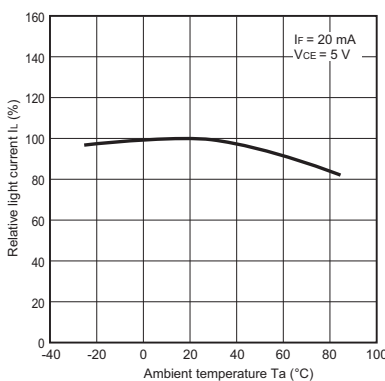


Fig 6. Dark Current vs. Ambient Temperature Characteristics (Typical)

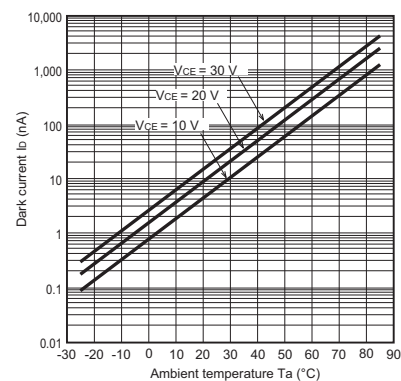


Fig 7. Response Time vs. Light Current Characteristics (Typical)

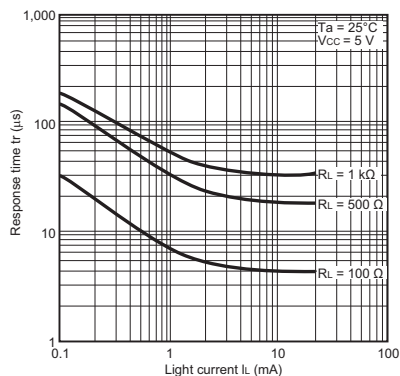


Fig 8. Sensing Position Characteristics (Typical)

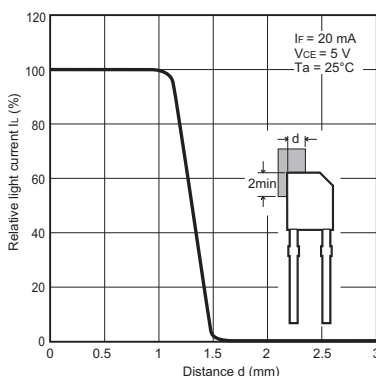


Fig 9. Sensing Position Characteristics (Typical)


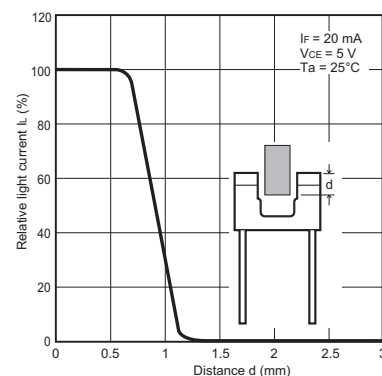


Fig 10. Response Time Measurement Circuit



Safety Precautions

To ensure safe operation, be sure to read and follow the Instruction Manual provided with the Sensor.

**CAUTION**

This product is not designed or rated for ensuring safety of persons either directly or indirectly.
Do not use it for such purposes.



Precautions for Correct Use

Do not use the product in atmospheres or environments that exceed product ratings.

Precautions for Safe Use

Do not use the product with a voltage or current that exceeds the rated range.
Applying a voltage or current that is higher than the rated range may result in explosion or fire.

Do not miswire such as the polarity of the power supply voltage.
Otherwise the product may be damaged or it may burn.


This product does not resist water. Do not use the product in places where water or oil may be sprayed onto the product.

Dimensions and Internal Circuit

(Unit: mm)


Photomicrosensor

EE-SX1105




Aperture size (H × W)

Emitter	Detector
1 × 0.4	1 × 0.4

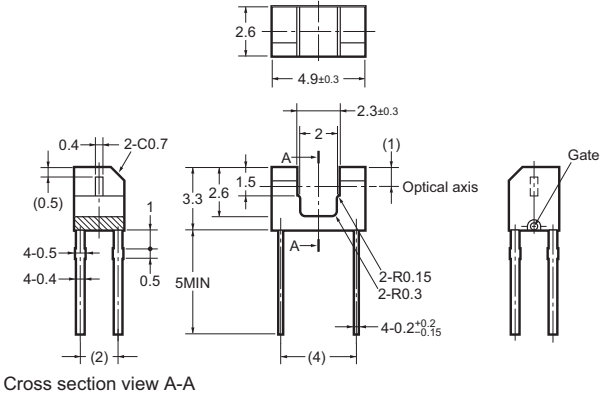

Cross section view A-A



Internal circuit

Terminal No.	Name
A	Anode
K	Cathode
C	Collector
E	Emitter

Note: 1. Unless otherwise specified, the tolerances are ±0.2 mm.
2. Dimensions in parentheses are for reference only.
3. Dimensions of the slit are those of the primary mold.

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Device & Module Solutions Company

Regional Contact

Americas

<https://components.omron.com/us>

Asia-Pacific

<https://components.omron.com/ap>

Korea

<https://components.omron.com/kr>

Europe

<https://components.omron.com/eu>

China

<https://components.omron.com.cn>

Japan

<https://components.omron.com/jp>