

UGSK/S + GS - Slide-type terminal block



0313085

<https://www.phoenixcontact.com/us/products/0313085>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Slide-type terminal block, with slide, nom. voltage: 500 V, nominal current: 41 A, number of connections: 2, connection method: Screw connection, 1 level, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: gray

Your advantages

- Measuring equipment or protective relays can be individually connected with the aid of bridges and slides
- Here, the slides make contact with the switching jumper depending on the switching task

Commercial data

Item number	0313085
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE12
Product key	BE1233
Catalog page	Page 517 (C-1-2019)
GTIN	4017918001681
Weight per piece (including packing)	32.727 g
Weight per piece (excluding packing)	31.376 g
Customs tariff number	85369010
Country of origin	DE

UGSK/S + GS - Slide-type terminal block



0313085

<https://www.phoenixcontact.com/us/products/0313085>

Technical data

Product properties

Product type	Feed-through terminal block
Product family	UGSK
Number of connections	2
Number of rows	1
Potentials	1

Data management status

Article revision	05
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W

Connection data

Nominal cross section	6 mm ²
-----------------------	-------------------

1 level

Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm
Stripping length	11 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.5 mm ² ... 10 mm ²
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 6 mm ²
Conductor cross section, flexible [AWG]	20 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 4 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible	0.5 mm ² ... 4 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 4 mm ²
Nominal current	41 A
Maximum load current	57 A (with 10 mm ² conductor cross section)
Nominal voltage	500 V
Nominal cross section	6 mm ²

UGSK/S + GS - Slide-type terminal block



0313085

<https://www.phoenixcontact.com/us/products/0313085>

Dimensions

Width	8.2 mm
Height	61 mm
Depth on NS 32	57.6 mm
Depth on NS 35/7,5	52.7 mm
Depth on NS 35/15	60.2 mm

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	125 °C
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

UGSK/S + GS - Slide-type terminal block




0313085
<https://www.phoenixcontact.com/us/products/0313085>

Drawings

Circuit diagram



Circuit diagram

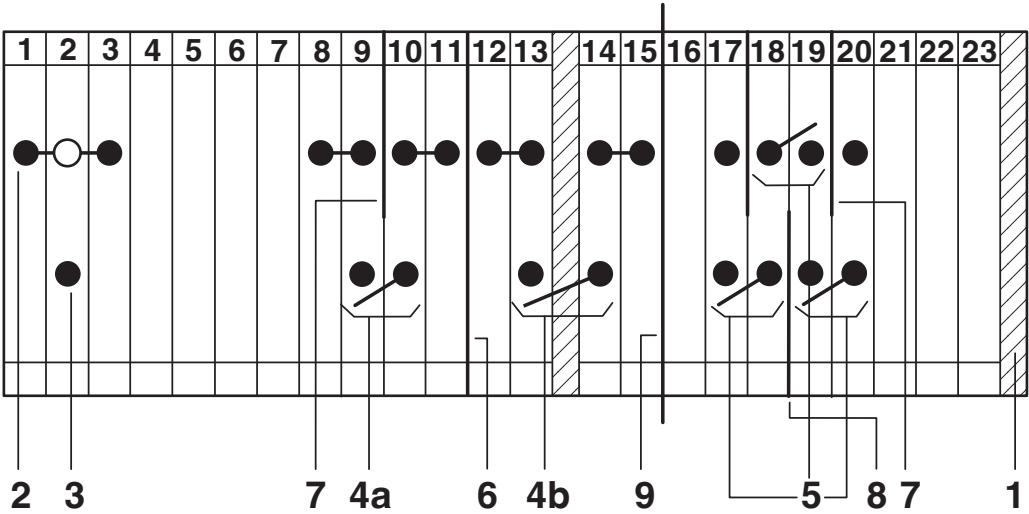

UGSK/S + GS - Slide-type terminal block



0313085

<https://www.phoenixcontact.com/us/products/0313085>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/0313085>



EAC

Approval ID: RU C-DE.BL08.B.00534

UGSK/S + GS - Slide-type terminal block



0313085

<https://www.phoenixcontact.com/us/products/0313085>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UGSK/S + GS - Slide-type terminal block



0313085

<https://www.phoenixcontact.com/us/products/0313085>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

UGSK/S + GS - Slide-type terminal block



0313085

<https://www.phoenixcontact.com/us/products/0313085>

Accessories

i Note: Applying some accessories below might limit this product.

FB 10- GSK/S - Fixed bridge

0305174

<https://www.phoenixcontact.com/us/products/0305174>

Fixed bridge, pitch: 8.2 mm, number of positions: 10, color: silver



i Max. current carrying capacity: 43 A

EB 2- 8 - Insertion bridge

0202154

<https://www.phoenixcontact.com/us/products/0202154>

Insertion bridge, pitch: 8 mm, number of positions: 2, color: gray



UGSK/S + GS - Slide-type terminal block

0313085


<https://www.phoenixcontact.com/us/products/0313085>



EB 3- 8 - Insertion bridge

0202141

<https://www.phoenixcontact.com/us/products/0202141>




Insertion bridge, pitch: 8 mm, number of positions: 3, color: gray

EB 10- 8 - Insertion bridge

0202138

<https://www.phoenixcontact.com/us/products/0202138>



Insertion bridge, pitch: 8 mm, number of positions: 10, color: gray

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



GS-GSK/S - Slide

0305116

<https://www.phoenixcontact.com/us/products/0305116>

Slide, color: silver



DSBJ- 8/13-GSK/S - Cross connector/bridge

0305828

<https://www.phoenixcontact.com/us/products/0305828>

Cross connector/bridge, pitch: 8 mm, number of positions: 2, color: silver



 Max. current carrying capacity: 43 A

UGSK/S + GS - Slide-type terminal block



0313085

<https://www.phoenixcontact.com/us/products/0313085>

SBJ 2- 8/13-GSK/S - Switching jumper

0305239

<https://www.phoenixcontact.com/us/products/0305239>

Switching jumper, pitch: 13 mm, number of positions: 2, color: silver



 Max. current carrying capacity: 43 A

EB 4- 8 - Insertion bridge

0202142

<https://www.phoenixcontact.com/us/products/0202142>

Insertion bridge, pitch: 8 mm, number of positions: 4, color: gray



 Max. current carrying capacity: 41 A

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



EB 1/3/5/7-8 - Insertion bridge

3072340

<https://www.phoenixcontact.com/us/products/3072340>



Insertion bridge, pitch: 16.4 mm, number of positions: 4, pin assignment: 1, 3, 5, 7, length: 24 mm, color: gray

 Max. current carrying capacity: 41 A

EB 1/3/5-8 - Insertion bridge

3072341

<https://www.phoenixcontact.com/us/products/3072341>



Insertion bridge, pitch: 16.4 mm, number of positions: 3, pin assignment: 1,3,5, length: 24 mm, color: gray

 Max. current carrying capacity: 41 A

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



PSB 3,5/8,5/6 - Test plug strip

0305297

<https://www.phoenixcontact.com/us/products/0305297>



Test plug strip, color: silver

D-UGSK - End cover

0304023

<https://www.phoenixcontact.com/us/products/0304023>



End cover, depth: 41.5 mm, width: 2.2 mm, height: 61 mm, color: gray

UGSK/S + GS - Slide-type terminal block



0313085

<https://www.phoenixcontact.com/us/products/0313085>

SCPI 4-8 - Short-circuit connector

3070424

<https://www.phoenixcontact.com/us/products/3070424>

Short-circuit connector, pitch: 8.15 mm, number of positions: 4, color: orange



SCP 2-8 - Short-circuit connector

3070402

<https://www.phoenixcontact.com/us/products/3070402>

Short-circuit connector, pitch: 8.15 mm, number of positions: 2, color: orange



UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



STSL-GSK - Separating plate

0305226

<https://www.phoenixcontact.com/us/products/0305226>



Separating plate, width: 0.8 mm, color: gray

TS-GSK - Separating plate

0304214

<https://www.phoenixcontact.com/us/products/0304214>



Separating plate, depth: 45.5 mm, width: 0.8 mm, height: 61 mm, color: gray

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



ATS-GSK - Partition plate

0304227

<https://www.phoenixcontact.com/us/products/0304227>

Partition plate, depth: 45.5 mm, width: 0.8 mm, height: 59.5 mm, color: gray



SBS 8:UNBEDRUCKT - Marker card

1007235

<https://www.phoenixcontact.com/us/products/1007235>

Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 6 x 8.1 mm



UGSK/S + GS - Slide-type terminal block

0313085


<https://www.phoenixcontact.com/us/products/0313085>



TS-UK 6-T - Separating plate

3072820

<https://www.phoenixcontact.com/us/products/3072820>



Separating plate, depth: 62.5 mm, width: 1 mm, height: 66.5 mm, color: gray

NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/us/products/1201002>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/us/products/1201015>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

UGSK/S + GS - Slide-type terminal block




0313085

<https://www.phoenixcontact.com/us/products/0313085>

ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/us/products/1052002>




Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/us/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/us/products/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/us/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/us/products/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/us/products/0829616>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

UGSK/S + GS - Slide-type terminal block




0313085

<https://www.phoenixcontact.com/us/products/0313085>

ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/us/products/1052015>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/us/products/1052028>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

UGSK/S + GS - Slide-type terminal block

0313085


<https://www.phoenixcontact.com/us/products/0313085>



ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/us/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray

UGSK/S + GS - Slide-type terminal block



0313085

<https://www.phoenixcontact.com/us/products/0313085>

E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



PSBJ-GSK/S FARBLOS - Test plug strip

0305394

<https://www.phoenixcontact.com/us/products/0305394>

Test plug strip, with slide, number of positions: 1, color: transparent



PSBJ-GSK/S WH - Test plug strip

0305310

<https://www.phoenixcontact.com/us/products/0305310>

Test plug strip, number of positions: 1, color: white



UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



PSBJ-GSK/S RD - Test plug strip

0305323

<https://www.phoenixcontact.com/us/products/0305323>



Test plug strip, number of positions: 1, color: red

PSBJ-GSK/S BU - Test plug strip

0305336

<https://www.phoenixcontact.com/us/products/0305336>



Test plug strip, number of positions: 1, color: blue

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



PSBJ-GSK/S YE - Test plug strip

0305349

<https://www.phoenixcontact.com/us/products/0305349>



Test plug strip, number of positions: 1, color: yellow

PSBJ-GSK/S GN - Test plug strip

0305352

<https://www.phoenixcontact.com/us/products/0305352>



Test plug strip, number of positions: 1, color: green

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



PSBJ-GSK/S VT - Test plug strip

0305365

<https://www.phoenixcontact.com/us/products/0305365>



Test plug strip, number of positions: 1, color: violet

PSBJ-GSK/S GY - Test plug strip

0305378

<https://www.phoenixcontact.com/us/products/0305378>



Test plug strip, number of positions: 1, color: gray

UGSK/S + GS - Slide-type terminal block

0313085

<https://www.phoenixcontact.com/us/products/0313085>



PSBJ-GSK/S BK - Test plug strip

0305381

<https://www.phoenixcontact.com/us/products/0305381>

Test plug strip, number of positions: 1, color: black



SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/us/products/1205066>

Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com