

1021498  
<https://www.phoenixcontact.com/us/products/1021498>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: black

Your advantages

- An extremely compact design
- Test pick-off on both sides in the fuse lever
- Tested for railway applications

Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1021498       |
| Packing unit                         | 50 pc         |
| Minimum order quantity               | 50 pc         |
| Sales key                            | BE01          |
| Product key                          | BE1134        |
| GTIN                                 | 4055626514253 |
| Weight per piece (including packing) | 17.544 g      |
| Weight per piece (excluding packing) | 17.544 g      |
| Customs tariff number                | 85369095      |
| Country of origin                    | PL            |

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## Technical data

### Product properties

|                       |                     |
|-----------------------|---------------------|
| Product type          | Fuse terminal block |
| Area of application   | Railway industry    |
|                       | Machine building    |
|                       | Plant engineering   |
| Number of connections | 2                   |
| Number of rows        | 1                   |
| Potentials            | 1                   |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 00 |
|------------------|----|

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |                                                                                                              |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Fuse type                                       | Glass / ceramics / ...                                                                                       |
| Rated surge voltage                             | 6 kV                                                                                                         |
| Maximum power dissipation for nominal condition | 1.02 W                                                                                                       |
| Fuse                                            | G / 5 x 20                                                                                                   |
| Maximum power dissipation                       | max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload)                     |
|                                                 | max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)        |
|                                                 | max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)                |
|                                                 | max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit) |

### Connection data

|                                                                   |                                            |
|-------------------------------------------------------------------|--------------------------------------------|
| Number of connections per level                                   | 2                                          |
| Nominal cross section                                             | 4 mm <sup>2</sup>                          |
| Screw thread                                                      | M3                                         |
| Tightening torque                                                 | 0.6 ... 0.8 Nm                             |
| Stripping length                                                  | 9 mm                                       |
| Internal cylindrical gage                                         | A4                                         |
| Conductor cross section rigid                                     | 0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup> |
| Cross section AWG                                                 | 26 ... 10 (converted acc. to IEC)          |
| Conductor cross section flexible                                  | 0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup> |
| Conductor cross section, flexible [AWG]                           | 26 ... 10 (converted acc. to IEC)          |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup> |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup> |

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

|                                                |                                              |
|------------------------------------------------|----------------------------------------------|
| 2 conductors with same cross section, solid    | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| 2 conductors with same cross section, flexible | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Nominal cross section                          | 4 mm <sup>2</sup>                            |

## Ex data

### Rated data (ATEX/IECEX)

|                             |                        |
|-----------------------------|------------------------|
| Identification              | Ex II 3 G Ex ec IIC Gc |
| Operating temperature range | -60 °C ... 130 °C      |
| Ex-certified accessories    | 1205053 SZS 0,6X3,5    |
|                             | 3022276 CLIPFIX 35-5   |
|                             | 3022218 CLIPFIX 35     |
| Rated voltage               | 275 V                  |
| Rated insulation voltage    | 250 V                  |
| output                      | (Permanent)            |

### Ex level General

|                      |                            |
|----------------------|----------------------------|
| Rated current        | 6.3 A (4 mm <sup>2</sup> ) |
| Maximum load current | 6.3 A (6 mm <sup>2</sup> ) |
| Contact resistance   | 5 mΩ                       |

### Ex connection data General

|                                                                                      |                                              |
|--------------------------------------------------------------------------------------|----------------------------------------------|
| Torque range                                                                         | 0.6 Nm ... 0.8 Nm                            |
| Nominal cross section                                                                | 4 mm <sup>2</sup>                            |
| Rated cross section AWG                                                              | 12                                           |
| Connection capacity rigid                                                            | 0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>   |
| Connection capacity AWG                                                              | 26 ... 10                                    |
| Connection capacity flexible                                                         | 0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>   |
| Connection capacity AWG                                                              | 26 ... 10                                    |
| 2 conductors with same cross section, solid                                          | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| 2 conductors with the same cross-section AWG rigid                                   | 26 ... 16                                    |
| 2 conductors with same cross section, stranded                                       | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| 2 conductors with the same cross-section AWG flexible                                | 26 ... 16                                    |
| Conductor cross section flexible, with ferrule without plastic sleeve min.           | 0.14 mm <sup>2</sup>                         |
| Conductor cross section flexible, with ferrule without plastic sleeve max.           | 4 mm <sup>2</sup>                            |
| Single conductor/terminal point, flexible, with ferrule, without plastic sleeve, AWG | 26 ... 12                                    |

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 6.2 mm  |
| Height             | 57.8 mm |
| Depth on NS 35/7,5 | 75.6 mm |
| Depth on NS 35/15  | 83.1 mm |

## Material specifications

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

|                                        |       |
|----------------------------------------|-------|
| Color                                  | black |
| Flammability rating according to UL 94 | V0    |
| Insulating material group              | I     |
| Insulating material                    | PA    |

## Mechanical properties

### Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Environmental and real-life conditions

### Ambient conditions

|                                          |                                                                                                                              |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)                                                     |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                                                                              |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                                                                              |
| Permissible humidity (operation)         | 20 % ... 90 %                                                                                                                |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                                                                                |

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |

# UT 4-HESI (5X20)-EX - Fuse modular terminal block




1021498

<https://www.phoenixcontact.com/us/products/1021498>

## Drawings

Circuit diagram

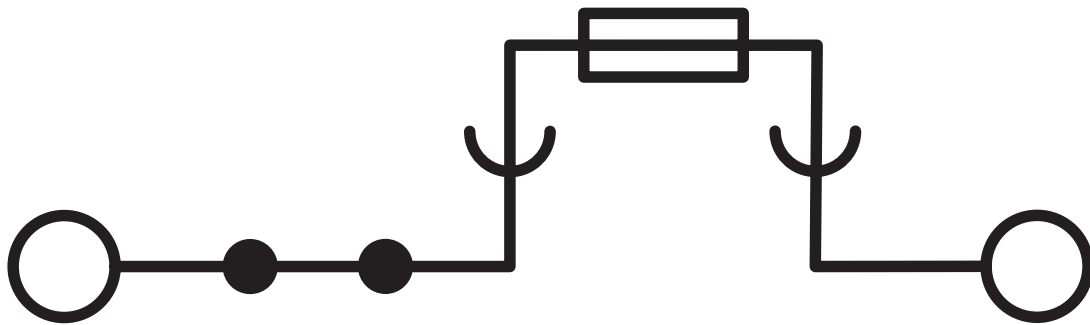


UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

Application drawing

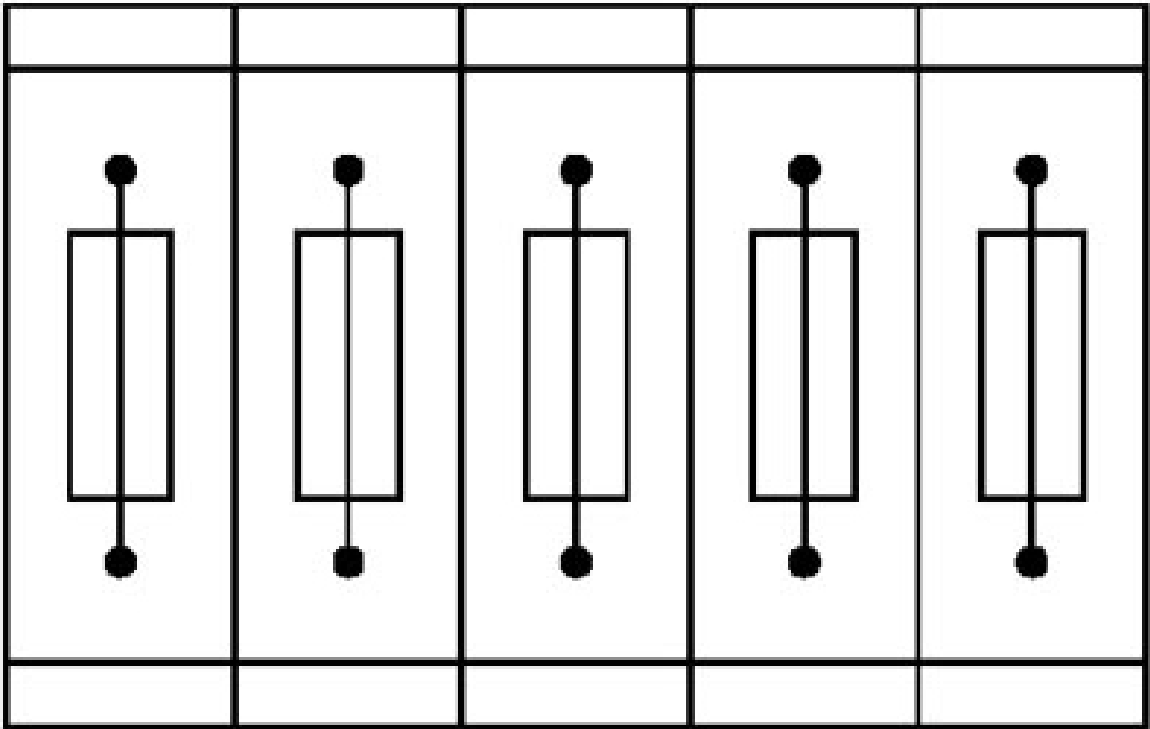

Fuse terminal blocks in interconnected arrangement,  
block consisting of 5 fuse terminal blocks


UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

Application drawing

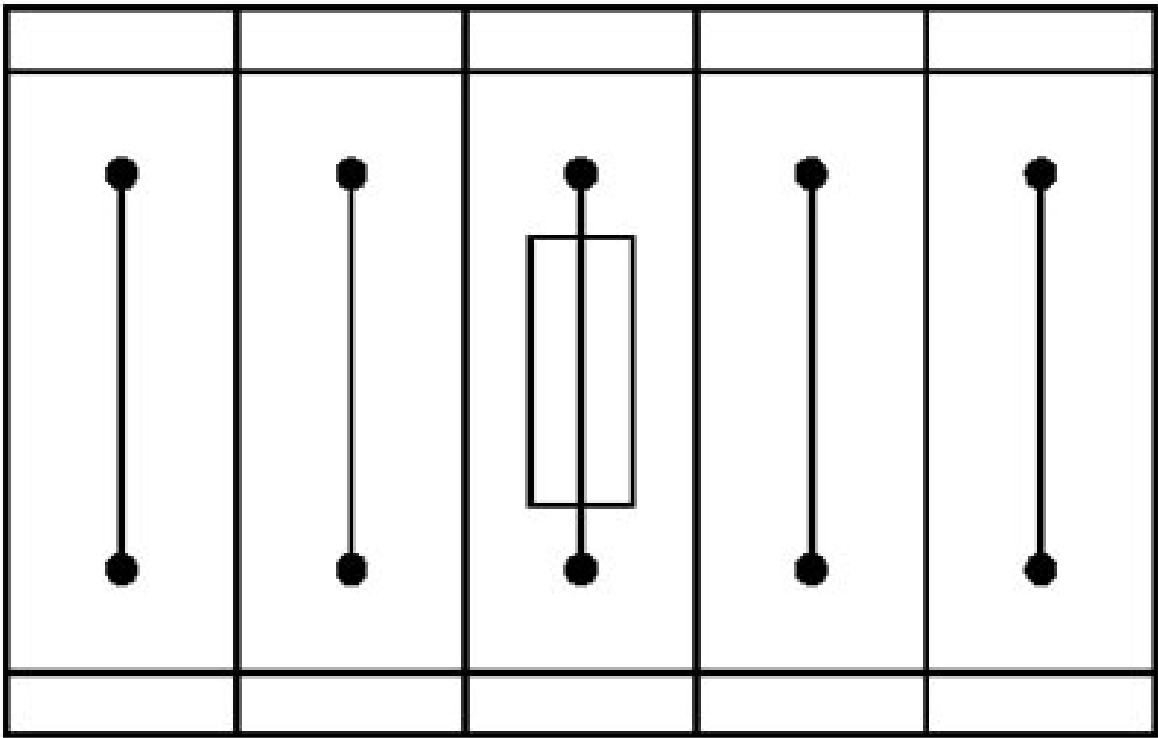

Fuse terminal block in single arrangement,  
block consisting of one fuse terminal block and 4 feed-through terminal blocks

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1021498>

|  <b>CSA</b><br>Approval ID: 13631 |                       |                       |                   |                             |
|--------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                    | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                        | 600 V                 | 6.3 A                 | 26 - 10           | -                           |
|                                                                                                                    |                       |                       |                   |                             |
| Use group C                                                                                                        | 600 V                 | 6.3 A                 | 26 - 10           | -                           |
|                                                                                                                    |                       |                       |                   |                             |

|  <b>EAC</b><br>Approval ID: RU C-DE.BL08.B.00534 |  |  |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|-----------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

|  <b>cULus Recognized</b><br>Approval ID: E60425 |                       |                       |                   |                             |
|------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                                    | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                                        | 600 V                 | 10 A                  | 26 - 10           | -                           |
|                                                                                                                                    |                       |                       |                   |                             |
| Multi-conductor connection                                                                                                         | 600 V                 | 10 A                  | 26 - 14           | -                           |
| Use group C                                                                                                                        | 600 V                 | 10 A                  | 26 - 10           | -                           |
|                                                                                                                                    |                       |                       |                   |                             |
| Multi-conductor connection                                                                                                         | 600 V                 | 10 A                  | 26 - 14           | -                           |

|  <b>cUL Recognized</b><br>Approval ID: E192998 |                       |                       |                   |                             |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                                   | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                                                                   | 500 V                 | 10 A                  | 26 - 10           | -                           |

|  <b>IECEx</b><br>Approval ID: IECExKIWA14.0014U |  |  |  |  |
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

|  <b>UL Recognized</b><br>Approval ID: E192998 |                       |                       |                   |                             |
|----------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                                  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                                                                  | 500 V                 | 10 A                  | 26 - 10           | -                           |

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>



**ATEX**

Approval ID: KIWA14ATEX0025U



**CCC**

Approval ID: 2020322313000632



**UKCA-EX**

Approval ID: CSAE 21UKEX3606U

**cULus Recognized**

Classifications

ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141116 |
| ECLASS-12.0 | 27141116 |
| ECLASS-13.0 | 27250113 |

ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC000899 |
|----------|----------|

UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes                                                                                                                                                                                                                               |
| Exemption                               | 6(c)                                                                                                                                                                                                                              |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-50                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)                                                                                                                                                                                                              |
| SCIP                                    | b85c1bff-8702-445b-bf6a-d8f32d87899f                                                                                                                                                                                              |

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## Accessories

**i** Note: Applying some accessories below might limit this product.

### FBS 2-6 - Plug-in bridge

3030336

<https://www.phoenixcontact.com/us/products/3030336>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

**i** Max. current carrying capacity: 32 A

### FBS 3-6 - Plug-in bridge

3030242

<https://www.phoenixcontact.com/us/products/3030242>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

**i** Max. current carrying capacity: 32 A

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## FBS 4-6 - Plug-in bridge

3030255

<https://www.phoenixcontact.com/us/products/3030255>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 32 A

---

## FBS 5-6 - Plug-in bridge

3030349

<https://www.phoenixcontact.com/us/products/3030349>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 32 A

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## FBS 6-6 - Plug-in bridge

1008238

<https://www.phoenixcontact.com/us/products/1008238>



Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red

 Max. current carrying capacity: 32 A

---

## FBS 10-6 - Plug-in bridge

3030271

<https://www.phoenixcontact.com/us/products/3030271>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 32 A

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## FBS 20-6 - Plug-in bridge

3030365

<https://www.phoenixcontact.com/us/products/3030365>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 32 A

---

## FBS 50-6 - Plug-in bridge

3032224

<https://www.phoenixcontact.com/us/products/3032224>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: red

 Max. current carrying capacity: 32 A

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## FBSR 2-6 - Plug-in bridge

3033715

<https://www.phoenixcontact.com/us/products/3033715>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A

---

## FBSR 3-6 - Plug-in bridge

3001594

<https://www.phoenixcontact.com/us/products/3001594>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 24 A

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## FBSR 4-6 - Plug-in bridge

3001595

<https://www.phoenixcontact.com/us/products/3001595>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 24 A

---

## FBSR 5-6 - Plug-in bridge

3001596

<https://www.phoenixcontact.com/us/products/3001596>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 24 A

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## FBSR 10-6 - Plug-in bridge

3033716

<https://www.phoenixcontact.com/us/products/3033716>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 24 A

---

## FBSRH 2-6 - Short-circuit connector

3033812

<https://www.phoenixcontact.com/us/products/3033812>



Short-circuit connector, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## FBS 2-6 BU - Plug-in bridge

3036932

<https://www.phoenixcontact.com/us/products/3036932>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 32 A

---

## FBS 3-6 BU - Plug-in bridge

3036945

<https://www.phoenixcontact.com/us/products/3036945>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 32 A

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## FBS 4-6 BU - Plug-in bridge

3036958

<https://www.phoenixcontact.com/us/products/3036958>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 32 A

---

## FBS 5-6 BU - Plug-in bridge

3036961

<https://www.phoenixcontact.com/us/products/3036961>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 32 A

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## FBS 10-6 BU - Plug-in bridge

3032198

<https://www.phoenixcontact.com/us/products/3032198>

Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue



 Max. current carrying capacity: 32 A


---

## FBS 20-6 BU - Plug-in bridge

3032208

<https://www.phoenixcontact.com/us/products/3032208>

Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue



 Max. current carrying capacity: 32 A

## UT 4-HESI (5X20)-EX - Fuse modular terminal block

1021498

<https://www.phoenixcontact.com/us/products/1021498>



### FBS 50-6 BU - Plug-in bridge

3032211

<https://www.phoenixcontact.com/us/products/3032211>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 32 A

---

### DMET 5X20 - Feed-through connector

3032075

<https://www.phoenixcontact.com/us/products/3032075>



Feed-through metal in the shape of a 5 x 20 mm glass tube fuse insert for use in fuse terminal blocks.

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

# UT 4-HESI (5X20)-EX - Fuse modular terminal block

1021498

<https://www.phoenixcontact.com/us/products/1021498>



## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# UT 4-HESI (5X20)-EX - Fuse modular terminal block

1021498

<https://www.phoenixcontact.com/us/products/1021498>



## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

# UT 4-HESI (5X20)-EX - Fuse modular terminal block

1021498

<https://www.phoenixcontact.com/us/products/1021498>



## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



---

## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# UT 4-HESI (5X20)-EX - Fuse modular terminal block

1021498

<https://www.phoenixcontact.com/us/products/1021498>



## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>



DIN rail end piece, for DIN rail NS 35/15

## UT 4-HESI (5X20)-EX - Fuse modular terminal block

1021498

<https://www.phoenixcontact.com/us/products/1021498>



## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>




DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

---

## ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/us/products/1050004>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/us/products/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

---

## ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/us/products/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/us/products/1050020>



Zack marker strip, white, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm

---

## ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/us/products/1050033>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/us/products/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

---

## UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/us/products/0818108>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 96

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/us/products/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96

---

## UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/us/products/0828734>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

## UT 4-HESI (5X20)-EX - Fuse modular terminal block

1021498

<https://www.phoenixcontact.com/us/products/1021498>



## UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/us/products/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

---

## GBS 5-25X12 - Group marker label for terminal marking

0810588

<https://www.phoenixcontact.com/us/products/0810588>



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## GBS 5-25X5 - Group marker label for terminal marking

0829126

<https://www.phoenixcontact.com/us/products/0829126>



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24 x 4 mm label or manually using B-STIFT, in the foot part with ZB 5

---

## STP 5-2-ZB - Marker carriers

3037643

<https://www.phoenixcontact.com/us/products/3037643>



Marker carriers, snaps into ST 2,5 spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unlabeled, mounting type: snapped

## UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

### ZB 6:UNBEDRUCKT - Zack marker strip

1051003

<https://www.phoenixcontact.com/us/products/1051003>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

### ZB 6 CUS - Zack marker strip

0824992

<https://www.phoenixcontact.com/us/products/0824992>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016

<https://www.phoenixcontact.com/us/products/1051016>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10

---

## ZB 6,QR:FORTL.ZAHLEN - Zack marker strip

1051029

<https://www.phoenixcontact.com/us/products/1051029>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## ZB 6,LGS:GLEICHE ZAHLEN - Zack marker strip

1051032

<https://www.phoenixcontact.com/us/products/1051032>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

## ZB 6,LGS:L1-N,PE - Marker for terminal blocks

1051414

<https://www.phoenixcontact.com/us/products/1051414>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## ZB 6,LGS:U-N - Marker for terminal blocks

1051430

<https://www.phoenixcontact.com/us/products/1051430>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

## UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/us/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## UC-TM 6 CUS - Marker for terminal blocks

0824589

<https://www.phoenixcontact.com/us/products/0824589>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

---

## UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/us/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

## UT 4-HESI (5X20)-EX - Fuse modular terminal block

1021498

<https://www.phoenixcontact.com/us/products/1021498>



## UCT-TM 6 CUS - Marker for terminal blocks

0829602

<https://www.phoenixcontact.com/us/products/0829602>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

---

## CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

## E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

## X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/us/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

# UT 4-HESI (5X20)-EX - Fuse modular terminal block



1021498

<https://www.phoenixcontact.com/us/products/1021498>

## SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)