

IOA LM-DI/R/RUSIO/EX - Monitoring block



1048209
<https://www.phoenixcontact.com/pc/products/1048209>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable monitoring module for VIP I/O marshalling base elements. Enables cable fault monitoring when using standard switching contacts in safety applications. Both wire breaks and short circuits can be detected.

Product description

Cable monitoring module for use in safety circuits. The module enables the detection of wire breaks and short circuits between IOA and I/O cards when using simple switching contacts. To do so, a 7.5 kΩ resistance connected in series to the measuring signal and a 15 kΩ resistor is also connected in parallel. The module is installed on a corresponding VIP I/O-Marshalling base element by means of plug-in contact. Installation in zone 2, “ec” type of protection is permitted.

Commercial data

Item number	1048209
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	CK8291
GTIN	4055626651125
Weight per piece (including packing)	53.5 g
Weight per piece (excluding packing)	53.5 g
Customs tariff number	85371098
Country of origin	US

1048209

<https://www.phoenixcontact.com/pc/products/1048209>

Technical data

Product properties

Product type	Interface module
Product family	VIP I/O-Marshalling
Number of positions	1

Data management status

Article revision	01
------------------	----

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

Max. operating voltage $U_{\max}$	30 V
Max. permissible current	6 mA (Signal)

Ex data

Safety data

Input voltage U_i	30 V
Input current I_i	6 mA
Inductance L_i	0 mH
Capacitance C_i	0 μ F
Max. output voltage U_o	U_i
Max. output current I_o	4 mA
Max. output power P_o	120 mW

Dimensions

Item dimensions

Width	10.3 mm
Height	64.2 mm
Depth	72.9 mm

Material specifications

Color	gray (RAL 7042)
-------	-----------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 75 °C
Ambient temperature (storage/transport)	-40 °C ... 75 °C
Altitude	2000 mm

Permissible humidity (operation)	0 % ... 95 % (non-condensing)
----------------------------------	-------------------------------

Approvals

ATEX

Identification	II 3G Ex ec IIC T4 Gc
	II 3G Ex ic IIC T4 Gc
Certificate	CSANe 20ATEX3152X

IECEX

Identification	Ex ec IIC T4 Gc
	Ex ic IIC T4 Gc
Certificate	IECEX SIR 21.0005X

UKEX

Identification	II 3G Ex ec IIC T4 Gc
	II 3G Ex ic IIC T4 Gc
Certificate	PxCIF23UKEX1048208X

CSA, USA/Canada

Identification	Class I, Div. 2, Groups A, B, C, D
	Class I, Zone 2, AEx ic IIC T4 Gc
	ANIFW apparatus for connection to: Class I, II, III, Div. 2 Groups A, B, C, D, F, G
	Ex ic IIC T4 Gc
	Ex ec IIC T4 Gc
Certificate	CSA 21CA80047687X

Standards and regulations


Standards/regulations	IEC 60664
	DIN EN 50178

Mounting

Mounting type	Plug-in mounting
Assembly note	Plugs into VIP/...BASE...
Mounting position	any

Drawings

Circuit diagram

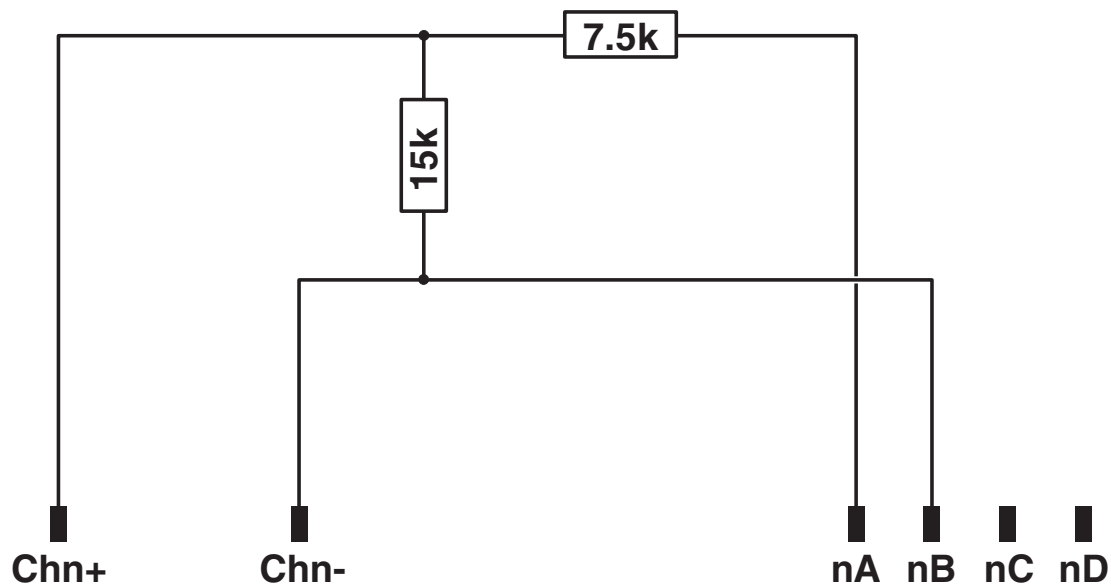

IOA LM-DI/R/RUSIO/EX - Monitoring block



1048209

<https://www.phoenixcontact.com/pc/products/1048209>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1048209>



IECEx

Approval ID: IECEx SIR 21.0005X



ATEX

Approval ID: CSANe 20ATEX3152X



CSA

Approval ID: 80047687



CSAus

Approval ID: 80047687

cCSAus

1048209

<https://www.phoenixcontact.com/pc/products/1048209>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

ETIM

ETIM 9.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

IOA LM-DI/R/RUSIO/EX - Monitoring block



1048209

<https://www.phoenixcontact.com/pc/products/1048209>

Mandatory accessories

VIP/S/MC/BASE 1-8/L/EX - Base module

2906596

<https://www.phoenixcontact.com/pc/products/2906596>



8-channel VIP I/O marshalling base element for universal use. All connections as screw connection technology. With the COMBICON connector, compatible with the Honeywell C300 and RUSIO series. Marking for channels 1–8.

VIP/S/MC/BASE 9-16/L/EX - Base module

2906630

<https://www.phoenixcontact.com/pc/products/2906630>



8-channel VIP I/O marshalling base element for universal use. All connections as screw connection technology. With the COMBICON connector, compatible with the Honeywell C300 and RUSIO series. Marking for channels 9–16.

IOA LM-DI/R/RUSIO/EX - Monitoring block



1048209

<https://www.phoenixcontact.com/pc/products/1048209>

VIP/S/MC/BASE 17-24/L/EX - Base module

2907024

<https://www.phoenixcontact.com/pc/products/2907024>



8-channel VIP I/O marshalling base element for universal use. All connections as screw connection technology. With the COMBICON connector, compatible with the Honeywell C300 and RUSIO series. Marking for channels 17–24.

VIP/S/MC/BASE 25-32/L/EX - Base module

2907025

<https://www.phoenixcontact.com/pc/products/2907025>



8-channel VIP I/O marshalling base element for universal use. All connections as screw connection technology. With the COMBICON connector, compatible with the Honeywell C300 and RUSIO series. Marking for channels 25–32.

IOA LM-DI/R/RUSIO/EX - Monitoring block

1048209

<https://www.phoenixcontact.com/pc/products/1048209>



VIP/S/MC/BASE 1-8/L/C/EX - Base module

2907186

<https://www.phoenixcontact.com/pc/products/2907186>



8-channel VIP I/O marshalling base element for universal use. All connections as screw connection technology. With the COMBICON connector, compatible with the Honeywell C300 and RUSIO series. Marking for channels 1–8 and painting.

VIP/S/MC/BASE 9-16/L/C/EX - Base module

2907187

<https://www.phoenixcontact.com/pc/products/2907187>



8-channel VIP I/O marshalling base element for universal use. All connections as screw connection technology. With the COMBICON connector, compatible with the Honeywell C300 and RUSIO series. Marking for channels 9–16 and painting.

IOA LM-DI/R/RUSIO/EX - Monitoring block



1048209

<https://www.phoenixcontact.com/pc/products/1048209>

VIP/S/MC/BASE 17-24/L/C/EX - Base module

2907209

<https://www.phoenixcontact.com/pc/products/2907209>



8-channel VIP I/O marshalling base element for universal use. All connections as screw connection technology. With the COMBICON connector, compatible with the Honeywell C300 and RUSIO series. Marking for channels 17–24 and painting.

VIP/S/MC/BASE 25-32/L/C/EX - Base module

2907210

<https://www.phoenixcontact.com/pc/products/2907210>



8-channel VIP I/O marshalling base element for universal use. All connections as screw connection technology. With the COMBICON connector, compatible with the Honeywell C300 and RUSIO series. Marking for channels 25–32 and painting.

IOA LM-DI/R/RUSIO/EX - Monitoring block

1048209

<https://www.phoenixcontact.com/pc/products/1048209>



VIP/S/D25M/BASE 1-8/L/C/EX - Base module

2906595

<https://www.phoenixcontact.com/pc/products/2906595>



8-channel VIP I/O marshalling base element for universal use. All connections as screw connection technology. This module with the D-SUB 25 connector is pin compatible with the Foxboro I/A series DCS.

VIP/MSTB/D50M/BASE/16CH/CX/EX - Base module

2908788

<https://www.phoenixcontact.com/pc/products/2908788>



16-channel VIP I/O marshalling base element for universal use. Plug-in field and supply terminals available as accessories. Either with screw or Push-in connection technology. Compatible with the Tricon CX DCS series (D-SUB 50).

Accessories

IOA LM-DI/R/RUSIO/EX - Monitoring block



1048209

<https://www.phoenixcontact.com/pc/products/1048209>

ZB 5,08:UNBEDRUCKT - Zack marker strip

0809793

<https://www.phoenixcontact.com/pc/products/0809793>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.08 mm, lettering field size: 4.98 x 10.5 mm, Number of individual labels: 10

UC-TM 10 - Marker for terminal blocks

0818069

<https://www.phoenixcontact.com/pc/products/0818069>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48

IOA LM-DI/R/RUSIO/EX - Monitoring block



1048209

<https://www.phoenixcontact.com/pc/products/1048209>

UC-TM 10 BU - Marker for terminal blocks

0818441

<https://www.phoenixcontact.com/pc/products/0818441>



Marker for terminal blocks, Sheet, blue, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48

UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/pc/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

IOA LM-DI/R/RUSIO/EX - Monitoring block

1048209

<https://www.phoenixcontact.com/pc/products/1048209>



UC-TM 6 BU - Marker for terminal blocks

0818344

<https://www.phoenixcontact.com/pc/products/0818344>



Marker for terminal blocks, Sheet, blue, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

ZB 5,08:UNBEDRUCKT - Zack marker strip

0809793

<https://www.phoenixcontact.com/pc/products/0809793>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.08 mm, lettering field size: 4.98 x 10.5 mm, Number of individual labels: 10

IOA LM-DI/R/RUSIO/EX - Monitoring block

1048209

<https://www.phoenixcontact.com/pc/products/1048209>



B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/pc/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com