

# TTC-6P-3-24DC-PT-I - Surge protection device



1061383

<https://www.phoenixcontact.com/pc/products/1061383>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Surge protection, consisting of protective plug and base element, with integrated status indicator for a 3-wire floating signal circuit with high nominal current, Ex e approval for zone 2, HART-compatible. Can be used in safety-related circuits up to SIL 3.

## Your advantages

- Space-saving and cost-saving with a narrow overall width of just 6 mm
- Continuous monitoring of protective devices, plus mechanical status indicator with optional remote signaling
- Finding the right product for all possible requirements in MCR applications is easy, thanks to the complete range of products with customized features
- Easy testing and documentation with CHECKMASTER 2 with pluggable protective modules
- The signal is not influenced during maintenance work, thanks to the impedance-neutral insertion and removal of protective plugs

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1061383             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Product key                          | CL2162              |
| Catalog page                         | Page 143 (C-4-2019) |
| GTIN                                 | 4055626715742       |
| Weight per piece (including packing) | 50.9 g              |
| Weight per piece (excluding packing) | 50.9 g              |
| Customs tariff number                | 85363010            |
| Country of origin                    | DE                  |

# TTC-6P-3-24DC-PT-I - Surge protection device



1061383

<https://www.phoenixcontact.com/pc/products/1061383>

## Technical data

### Product properties

|                         |                                         |
|-------------------------|-----------------------------------------|
| Product type            | Surge protection for MCR technology     |
| Product family          | TERMITRAB complete                      |
| IEC test classification | C1                                      |
|                         | C2                                      |
|                         | C3                                      |
|                         | D1                                      |
| Type                    | DIN rail module, two-section, divisible |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 07 |
|------------------|----|

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Pollution degree     | 2   |

### Electrical properties

|                       |         |
|-----------------------|---------|
| Nominal voltage $U_N$ | 24 V DC |
|-----------------------|---------|

### Connection data

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection method                | Push-in connection                          |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section rigid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section AWG      | 24 ... 12                                   |

### Ex data

|                                 |                       |
|---------------------------------|-----------------------|
| Maximum input current           | 5 A (55 °C)           |
| Maximum input voltage           | 30 V DC               |
| Altitude                        | ≤ 2000 m (amsl)       |
| Ambient temperature (operation) | -40 °C ... 80 °C (T4) |

### Dimensions

|                     |                                |
|---------------------|--------------------------------|
| Dimensional drawing |                                |
| Width               | 6.2 mm +0.1 mm                 |
| Height              | 105.8 mm                       |
| Depth               | 100 mm (incl. DIN rail 7.5 mm) |

### Material specifications

|                      |                 |
|----------------------|-----------------|
| Color (Base element) | gray (RAL 7042) |
|----------------------|-----------------|

# TTC-6P-3-24DC-PT-I - Surge protection device



1061383

<https://www.phoenixcontact.com/pc/products/1061383>

|                                        |                       |
|----------------------------------------|-----------------------|
| Color (Male connector)                 | light gray (RAL 7035) |
| Flammability rating according to UL 94 | V-0                   |
| Insulating material                    | PBT                   |
| Housing material                       | PBT                   |

## Mechanical properties

### Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Protective circuit

|                                                                 |                                                                                    |
|-----------------------------------------------------------------|------------------------------------------------------------------------------------|
| Direction of action                                             | Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground |
| Maximum continuous voltage $U_C$                                | 30 V DC                                                                            |
|                                                                 | 21 V AC                                                                            |
| Rated current                                                   | 5 A (55 °C)                                                                        |
| Operating effective current $I_C$ at $U_C$                      | $\leq 5 \mu A$                                                                     |
| Residual current $I_{PE}$                                       | $\leq 1 \mu A$                                                                     |
| Nominal discharge current $I_n$ (8/20) $\mu s$ (line-line)      | 0.5 kA                                                                             |
| Nominal discharge current $I_n$ (8/20) $\mu s$ (line-ground)    | 5 kA                                                                               |
| Pulse discharge current $I_{imp}$ (10/350) $\mu s$ (line-earth) | 0.5 kA                                                                             |
| Total discharge current $I_{total}$ (8/20) $\mu s$              | 10 kA                                                                              |
| Voltage protection level $U_p$ (line-line)                      | $\leq 68 V$ (C1 - 1 kV / 500 A)                                                    |
|                                                                 | $\leq 50 V$ (C3 - 100 A)                                                           |
|                                                                 | $\leq 50 V$ (C3 - 25 A)                                                            |
| Voltage protection level $U_p$ (line-earth)                     | $\leq 700 V$ (C1 - 1 kV / 500 A)                                                   |
|                                                                 | $\leq 900 V$ (C2 - 10 kV / 5 kA)                                                   |
| Response time $t_A$ (line-line)                                 | $\leq 1 ns$                                                                        |
| Response time $t_A$ (line-earth)                                | $\leq 100 ns$                                                                      |
| Input attenuation aE, sym.                                      | typ. 0.3 dB ( $\leq 12 MHz$ / 150 $\Omega$ )                                       |
| Cut-off frequency $f_g$ (3 dB), sym. in 150 $\Omega$ system     | typ. 60 MHz                                                                        |
| Capacity (Core-Core)                                            | typ. 30 pF                                                                         |
| Capacity (Core-Earth)                                           | typ. 30 pF                                                                         |
| Resistance per path                                             | $< 0.1 \Omega$                                                                     |
| Surge protection fault message                                  | optical                                                                            |
| Max. required back-up fuse                                      | 5 A (F)                                                                            |
| Impulse durability (line-line)                                  | C1 - 1 kV / 500 A                                                                  |
|                                                                 | C3 - 100 A                                                                         |
| Impulse durability (line-earth)                                 | C1 - 1 kV / 500 A                                                                  |
|                                                                 | C2 - 10 kV / 5 kA                                                                  |
|                                                                 | D1 - 500 A                                                                         |
| Pulse reset time (line-line)                                    | $\leq 30 ms$                                                                       |
| Pulse reset time (line-earth)                                   | $\leq 500 ms$                                                                      |

## Environmental and real-life conditions

# TTC-6P-3-24DC-PT-I - Surge protection device



1061383

<https://www.phoenixcontact.com/pc/products/1061383>

## Ambient conditions

|                                         |                  |
|-----------------------------------------|------------------|
| Degree of protection                    | IP20             |
| Ambient temperature (operation)         | -40 °C ... 85 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Altitude                                | ≤ 4000 m (amsl)  |
| Permissible humidity (operation)        | 5 % ... 95 %     |

## Approvals

### Conformity/Approvals

|                  |                                        |
|------------------|----------------------------------------|
| UL, USA / Canada | Class I, Div. 2, Groups A, B, C, D T4A |
|------------------|----------------------------------------|

## Standards and regulations

|                          |                                                       |
|--------------------------|-------------------------------------------------------|
| Standards/specifications | IEC 61643-21                                          |
| Note                     | 2000 + corrigendum 2001 + A1:2008, modified + A2:2012 |



### EN 61643-21

|                          |                          |
|--------------------------|--------------------------|
| Standards/specifications | EN 61643-21              |
| Note                     | 2001 + A1:2009 + A2:2013 |
| Standards/specifications | IEC 60079-0              |
| Note                     | 2017                     |
| Standards/specifications | IEC 60079-7              |
| Note                     | 2017                     |
| Standards/specifications | EN IEC 60079-0           |
| Note                     | 2018                     |
| Standards/specifications | EN IEC 60079-7           |
| Note                     | 2015 + A1:2018           |

## Mounting

|               |                          |
|---------------|--------------------------|
| Mounting type | DIN rail: TH 35 - 7.5 mm |
|---------------|--------------------------|

## Drawings

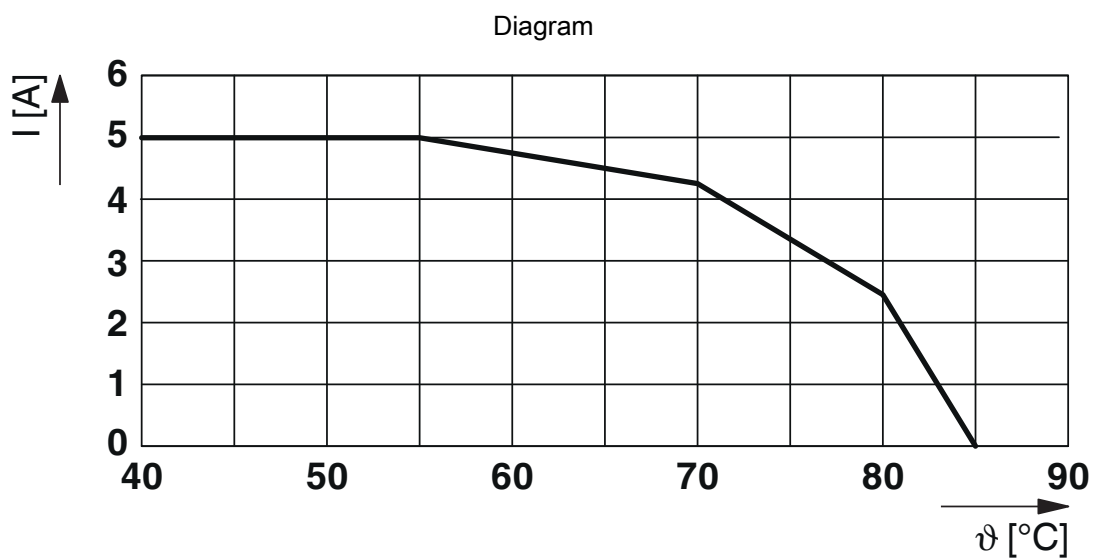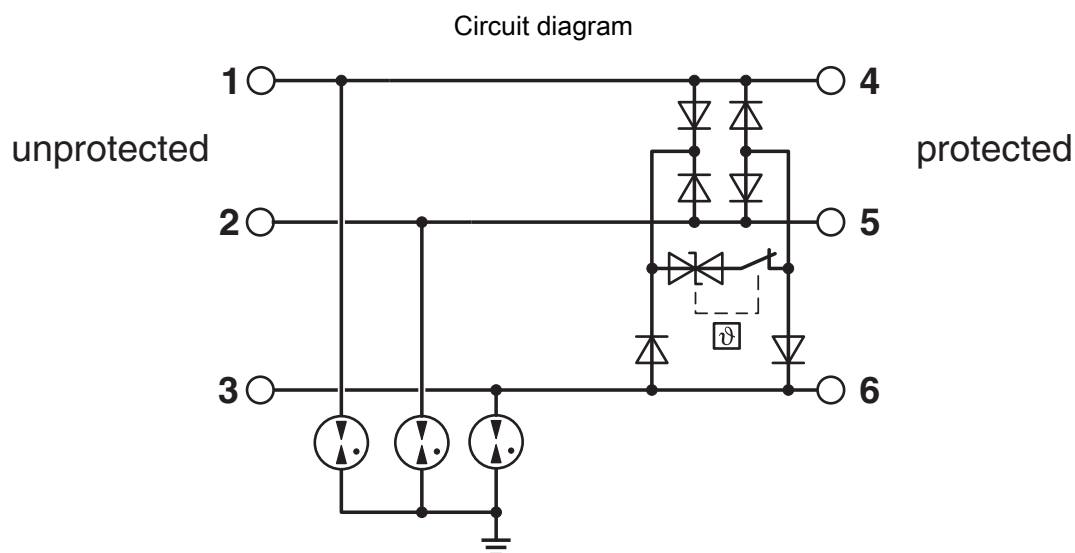

Derating for non-potentially explosive areas and potentially explosive areas (zone 2, EX ec)


TTC-6P-3-24DC-PT-I - Surge protection device

1061383

https://www.phoenixcontact.com/pc/products/1061383



Dimensional drawing

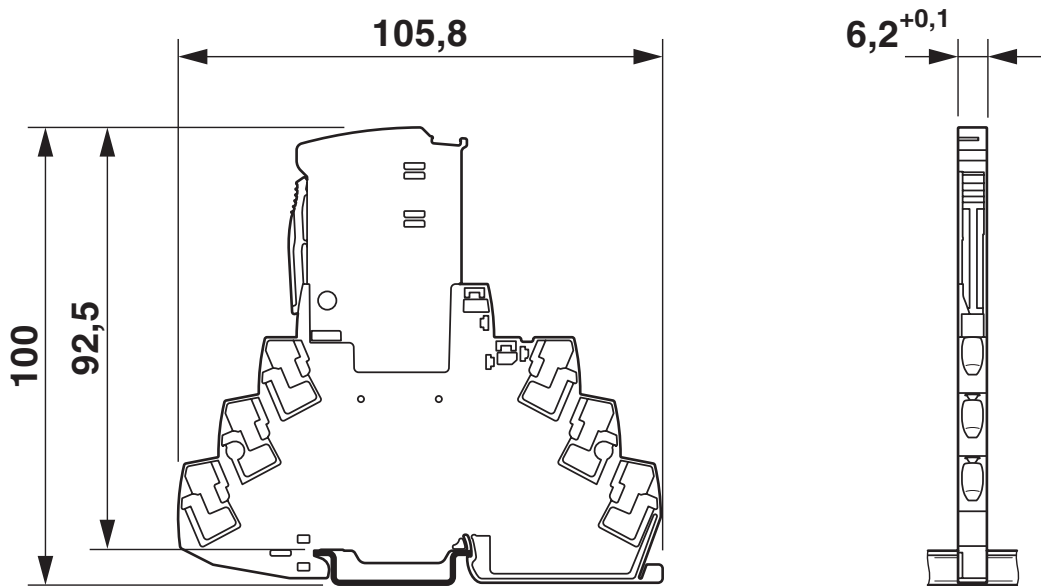

Schematic diagram

| TTC-6P-3-...DC-...-I                                                                                                                                                                                                                                                                                                     |                          |                           |                          |       |                          |                            |      |                          |       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------|--------------------------|-------|--------------------------|----------------------------|------|--------------------------|-------|
| Category                                                                                                                                                                                                                                                                                                                 | 1oo1 architecture, HFT=0 |                           |                          |       | 1oo2 architecture, HFT=1 |                            |      |                          |       |
|                                                                                                                                                                                                                                                                                                                          | PFD <sub>avg</sub>       | PFH                       | Used budget of SIL 2 SIF |       | PFD <sub>avg</sub>       | PFH                        | CCF  | Used budget of SIL 3 SIF |       |
|                                                                                                                                                                                                                                                                                                                          |                          |                           | PFD <sub>avg</sub>       | PFH   |                          |                            |      | PFD <sub>avg</sub>       | PFH   |
|                                                                                                                                                                                                                                                                                                                          | 9.22x10 <sup>-5</sup>    | 1.64x10 <sup>-8</sup> 1/h | 0.9 %                    | 1.6 % | 4.62x10 <sup>-6</sup>    | 8.22x10 <sup>-10</sup> 1/h | 5 %  | 0.5 %                    | 0.8 % |
|                                                                                                                                                                                                                                                                                                                          |                          |                           |                          |       | 9.00x10 <sup>-6</sup>    | 1.64x10 <sup>-9</sup> 1/h  | 10 % | 0.9 %                    | 1.6 % |
| Calculation based on exida report, Phoenix Contact 16/06-072 R022 V4R2<br>exida Profile 1, FMEDA Analysis 2, T <sub>proof</sub> : 1 year, MT: 10 years, MTTR: 24 hours, PTC: 99%<br>Used standards<br>IEC/EN 61508, edition 2010 (device specific)<br>IEC/EN 61511, edition 2016 + COR1:2016 + A1:2017 (system specific) |                          |                           |                          |       |                          |                            |      |                          |       |

Functional safety scenarios

# TTC-6P-3-24DC-PT-I - Surge protection device



1061383

<https://www.phoenixcontact.com/pc/products/1061383>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1061383>



### UL Listed

Approval ID: FILE E 138168



### DNV GL

Approval ID: TAE000027G

### UAE-RoHS

Approval ID: 22-06-16781

### Functional Safety

Approval ID: 16-06-072 R022 V4R2



### cUL Listed

Approval ID: FILE E 333250



### UL Listed

Approval ID: FILE E 333250



### IECEx

Approval ID: IECEx BVS 21.0057X



### ATEX

Approval ID: BVS 21 ATEX E 052 X



### CCC

Approval ID: 2022122304116080



### UKCA-EX

Approval ID: DEKRA 23UKEX7003X

### cULus Listed

# TTC-6P-3-24DC-PT-I - Surge protection device



1061383

<https://www.phoenixcontact.com/pc/products/1061383>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27130807 |
| ECLASS-13.0 | 27171501 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001625 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121600 |
|-------------|----------|



# TTC-6P-3-24DC-PT-I - Surge protection device



1061383

<https://www.phoenixcontact.com/pc/products/1061383>

## Environmental product compliance

### EU RoHS

|                                         |      |
|-----------------------------------------|------|
| Fulfills EU RoHS substance requirements | Yes  |
| Exemption                               | 7(a) |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | b27d288d-19ba-415e-a407-70e48ea67744 |

# TTC-6P-3-24DC-PT-I - Surge protection device



1061383

<https://www.phoenixcontact.com/pc/products/1061383>

## Accessories

### X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/pc/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

---

### ZBF 6 CUS - Zack Marker strip, flat

0825027

<https://www.phoenixcontact.com/pc/products/0825027>



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

# TTC-6P-3-24DC-PT-I - Surge protection device



1061383

<https://www.phoenixcontact.com/pc/products/1061383>

## ZBF 6:UNBEDRUCKT - Zack Marker strip, flat

0808710

<https://www.phoenixcontact.com/pc/products/0808710>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

---

## ZBF 6/WH-100:UNBEDRUCKT - Zack Marker strip, flat

0808736

<https://www.phoenixcontact.com/pc/products/0808736>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 1000

# TTC-6P-3-24DC-PT-I - Surge protection device

1061383

<https://www.phoenixcontact.com/pc/products/1061383>



## ZBF 6,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808765

<https://www.phoenixcontact.com/pc/products/0808765>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

---

## TTC-6-FMRS-PT - Remote signaling set

2907811

<https://www.phoenixcontact.com/pc/products/2907811>



Module set for the optical monitoring and floating remote signaling of adjacent surge protective devices in the TERMITRAB complete or CLIXTRAB product family. Suitable for directly grounded DIN rails.

# TTC-6P-3-24DC-PT-I - Surge protection device



1061383

<https://www.phoenixcontact.com/pc/products/1061383>

## SSA 3-6 - Shield connection

2839295

<https://www.phoenixcontact.com/pc/products/2839295>

Shield fast connection for 3 ... 6 mm cable diameter. Potential connecting cable:  
200 mm, 1 mm<sup>2</sup>, color: black



---

## SSA 5-10 - Shield connection

2839512

<https://www.phoenixcontact.com/pc/products/2839512>

Shield fast connection for 5 ... 10 mm cable diameter. Potential connecting cable:  
200 mm, 1 mm<sup>2</sup>, color: black



# TTC-6P-3-24DC-PT-I - Surge protection device



1061383

<https://www.phoenixcontact.com/pc/products/1061383>

## TTC-6P-3-24DC-I-P - Surge protection plug

1061384

<https://www.phoenixcontact.com/pc/products/1061384>



Surge protection plug with integrated status indicator on the module for a 3-wire floating signal circuit with a high nominal current. Nominal voltage: 24 V DC

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)