


# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing



1074838  
<https://www.phoenixcontact.com/us/products/1074838>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail housing, Lower housing part with base latch, flat design, without vents, width: 52.6 mm, height: 75 mm, depth: 30.3 mm, color: light gray (similar RAL 7035), cross connection: without bus connector, number of positions cross connector: not relevant

## Your advantages

- DIN rail or wall mounting for application-specific device attachment
- Easy design-in, thanks to variable housing form factor
- Complete flexibility, thanks to PCBs with horizontal, frontal, and orthogonal orientation to the front of the device
- Three cover versions for individual PCB connections
- Integration of a wide variety of PCB connection technologies for a functional device design

## Commercial data

Item number	1074838
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	AC12
Product key	ACHCHB
GTIN	4055626776637
Weight per piece (including packing)	55 g
Weight per piece (excluding packing)	51.92 g
Customs tariff number	84879090
Country of origin	IN

# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing



1074838  
<https://www.phoenixcontact.com/us/products/1074838>

## Technical data

### Notes

Assembly note	Refer to the data sheet for the range in the download area.
---------------	---


### Product properties

Product type	Enclosure bottom part
Housing type	DIN rail housing
Housing series	EH
Product family	EH..F..ABS-PC..
Type	Lower housing parts without vents, housing cover necessary to complete the module
Max. number of positions	0)
Type	Lower housing part with base latch, flat design
Ventilation openings present	no

### Data management status

Article revision	01
------------------	----

### Dimensions

Dimensional drawing	
Width	52.6 mm
Height	75 mm
Depth	30.3 mm
Depth from top edge of DIN rail to support point on upper part	26 mm

### PCB design

PCB thickness	1.4 mm ... 1.8 mm
---------------	-------------------

### Material specifications

Color (Housing)	light gray (RAL 7035)
Flammability rating according to UL 94	V0
Housing material	ABS-PC
Surface characteristics	untreated

### Environmental and real-life conditions

#### Vibration test

# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing



1074838

<https://www.phoenixcontact.com/us/products/1074838>

Specification	IEC 60068-2-6:2007-12
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.15 mm (10 Hz ... 58.1 Hz)
Acceleration	2g (58.1 Hz ... 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis

## Glow-wire test

Specification	IEC 60695-2-11:2014-02
Temperature	850 °C
Time of exposure	30 s

## Thermal stability / ball thrust test

Specification	IEC 60695-10-2:2014-02
Temperature	80 °C
Test duration	1 h
Force	20 N

## Mechanical strength / tumbling barrel

Specification	IEC 60998-1:2002-12
Height of fall	50 cm
Frequency	10

## Shocks

Specification	IEC 60068-2-27:2008-02
Pulse shape	Half-sine
Acceleration	15g
Shock duration	11 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)

## Degree of protection (IP code)

Specification	IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08
---------------	---

## Ambient conditions

Max. IP code to attain	IP20
Ambient temperature (operation)	-40 °C ... 80 °C (depending on power dissipation)
Ambient temperature (storage/transport)	-40 °C ... 55 °C
Ambient temperature (assembly)	-5 °C ... 80 °C
Relative humidity (storage/transport)	95 %

## PCB data

Type of PCB mount	Latching
Thickness of the PCB	1.4 mm ... 1.8 mm

## Mounting

# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing



1074838  
<https://www.phoenixcontact.com/us/products/1074838>

Mounting type	DIN rail mounting/wall mounting (with optional base latch)
---------------	--

## Packaging specifications

Type of packaging	packed in cardboard
Outer packaging type	Carton


# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing

1074838

<https://www.phoenixcontact.com/us/products/1074838>

## Drawings

Dimensional drawing

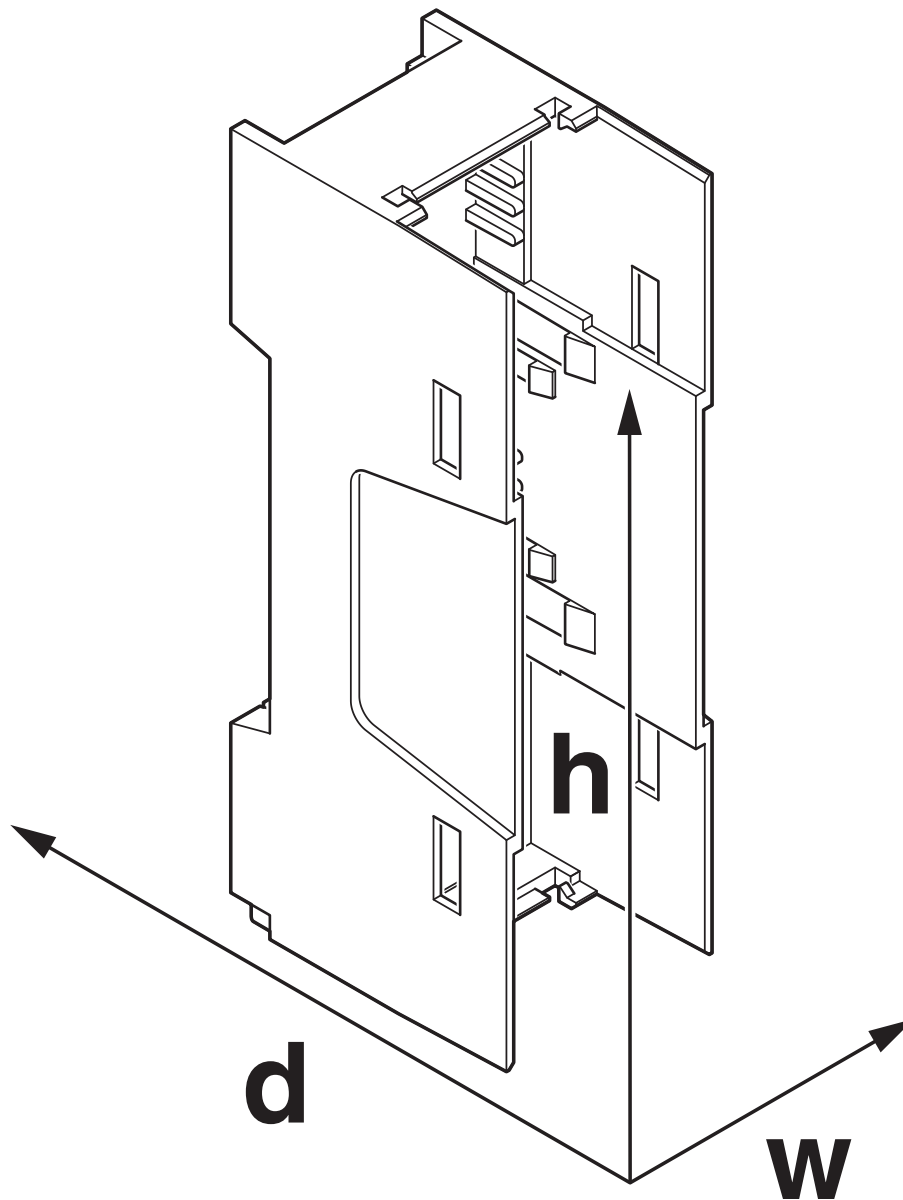

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.

# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing



1074838

<https://www.phoenixcontact.com/us/products/1074838>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1074838>



**UL Recognized**

Approval ID: E240868

# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing



1074838  
<https://www.phoenixcontact.com/us/products/1074838>

## Classifications

### ECLASS

ECLASS-11.0	27182702
ECLASS-13.0	27190601

### ETIM

ETIM 9.0	EC001031
----------	----------

### UNSPSC

UNSPSC 21.0	31261500
-------------	----------

# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing



1074838  
<https://www.phoenixcontact.com/us/products/1074838>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing



1074838

<https://www.phoenixcontact.com/us/products/1074838>

## Mandatory accessories

### EH 52,5 F-C SS/ABS-PC GY7035 - Upper housing part

1074796

<https://www.phoenixcontact.com/us/products/1074796>



DIN rail housing, Upper housing part, flat design, connection opening on one side, connection opening on one side, width: 52.6 mm, height: 74.65 mm, depth: 36.95 mm, color: light gray (similar RAL 7035)

---

### EH 52,5 F-C DS/ABS-PC GY7035 - Upper housing part

1074802

<https://www.phoenixcontact.com/us/products/1074802>



DIN rail housing, Upper housing part, flat design, connection opening on both sides, width: 52.6 mm, height: 74.65 mm, depth: 36.95 mm, color: light gray (similar RAL 7035)

# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing

1074838

<https://www.phoenixcontact.com/us/products/1074838>

## EH 52,5 F-C CS/ABS-PC GY7035 - Upper housing part

1074794

<https://www.phoenixcontact.com/us/products/1074794>



DIN rail housing, Upper housing part, flat design, no connection opening, width: 52.6 mm, height: 74.65 mm, depth: 36.95 mm, color: light gray (similar RAL 7035)

---

## EH 52,5 F-C SS/ABS-PC BK9005 - Upper housing part

1074788

<https://www.phoenixcontact.com/us/products/1074788>



DIN rail housing, Upper housing part, flat design, connection opening on one side, connection opening on one side, width: 52.6 mm, height: 74.65 mm, depth: 36.95 mm, color: black (similar RAL 9005)

# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing



1074838

<https://www.phoenixcontact.com/us/products/1074838>

## EH 52,5 F-C DS/ABS-PC BK9005 - Upper housing part

1074755

<https://www.phoenixcontact.com/us/products/1074755>



DIN rail housing, Upper housing part, flat design, connection opening on both sides, width: 52.6 mm, height: 74.65 mm, depth: 36.95 mm, color: black (similar RAL 9005)

---

## EH 52,5 F-C CS/ABS-PC BK9005 - Upper housing part

1074754

<https://www.phoenixcontact.com/us/products/1074754>



DIN rail housing, Upper housing part, flat design, no connection opening, width: 52.6 mm, height: 74.65 mm, depth: 36.95 mm, color: black (similar RAL 9005)

---

## Accessories

# EH 52,5 F-B/ABS-PC GY7035 - Mounting base housing



1074838

<https://www.phoenixcontact.com/us/products/1074838>

## EH SNAPLOCK SET WALL MOUNT OG - Base latch

2202007

<https://www.phoenixcontact.com/us/products/2202007>

DIN rail housing, Base latch for wall mounting, width: 28.8 mm, height: 18.7 mm, depth: 4.15 mm, color: orange (similar RAL 2003)



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)