

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PLC-INTERFACE consisting of PLC-BSC.../21HC/SO46/HI basic terminal block with screw connection and plug-in miniature relay for high continuous current, 1 changeover contact, nominal input voltage of 230 V AC, with defined activation and deactivation thresholds

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1079402             |
| Packing unit                         | 10 pc               |
| Minimum order quantity               | 10 pc               |
| Sales key                            | C461                |
| Product key                          | CK623M              |
| Catalog page                         | Page 393 (C-5-2019) |
| GTIN                                 | 4055626798936       |
| Weight per piece (including packing) | 75.87 g             |
| Weight per piece (excluding packing) | 63.06 g             |
| Customs tariff number                | 85364900            |
| Country of origin                    | DE                  |

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## Technical data

### Product properties

|                         |                                |
|-------------------------|--------------------------------|
| Product type            | Relay Module                   |
| Product family          | PLC-INTERFACE                  |
| Application             | Filter to prevent interference |
| Operating mode          | 100% operating factor          |
| Mechanical service life | 3x 10 <sup>7</sup> cycles      |

### Data management status

|                              |            |
|------------------------------|------------|
| Date of last data management | 08.08.2024 |
| Article revision             | 04         |

### Insulation characteristics: Air clearances and creepage distances between the power circuits

|                      |                                                                                                                            |
|----------------------|----------------------------------------------------------------------------------------------------------------------------|
| Insulation           | Basic insulation<br>Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths |
| Overvoltage category | III                                                                                                                        |
| Pollution degree     | 2                                                                                                                          |

### Electrical properties

|                                                 |                                          |
|-------------------------------------------------|------------------------------------------|
| Maximum power dissipation for nominal condition | 1.04 W                                   |
| Test voltage (Winding/contact)                  | 4 kV AC (50 Hz, 1 min., winding/contact) |

### Air clearances and creepage distances between the power circuits

|                     |      |
|---------------------|------|
| Rated surge voltage | 4 kV |
|---------------------|------|

### Input data

#### Coil side

|                                                      |                                        |
|------------------------------------------------------|----------------------------------------|
| Nominal input voltage $U_N$                          | 230 V AC                               |
| Input voltage range                                  | 190 V AC ... 264 V AC (20 °C)          |
| Nominal voltage (plugged-in electromechanical relay) | 110 V DC                               |
| Switch-on threshold                                  | 190 V AC                               |
| Switch-off threshold                                 | 170 V AC                               |
| Drive and function                                   | monostable                             |
| Drive (polarity)                                     | polarized                              |
| Typical input current at $U_N$                       | 14 mA (50 Hz)                          |
| Input power dissipation for $U_N$                    | 3 VA                                   |
| Typical response time                                | 10 ms                                  |
| Typical release time                                 | 8 ms                                   |
| Protective circuit                                   | Bridge rectifier                       |
| Input circuit                                        | RC element with threshold value switch |
| Operating voltage display                            | Yellow LED                             |

### Output data

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## Switching

|                                               |                                                                                                                                                                                                                                               |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact switching type                        | 1 changeover contact                                                                                                                                                                                                                          |
| Type of switch contact                        | Single contact                                                                                                                                                                                                                                |
| Contact material                              | AgNi                                                                                                                                                                                                                                          |
| Maximum switching voltage                     | 250 V AC/DC (The separating plate PLC-ATP should be installed for voltages larger than 250 V (L1, L2, L3) between identical terminal blocks in adjacent modules. Potential bridging is then carried out with FBST 8-PLC... or ...FBST 500...) |
| Minimum switching voltage                     | 12 V (10 mA)                                                                                                                                                                                                                                  |
| Limiting continuous current                   | 10 A<br>6 A (value applies to connections 12. If connections 12 are bridged, the normal value applies.)                                                                                                                                       |
| Maximum inrush current                        | 30 A (300 ms)                                                                                                                                                                                                                                 |
| Min. switching current                        | 10 mA (12 V)                                                                                                                                                                                                                                  |
| Interrupting rating (ohmic load) max.         | 240 W (at 24 V DC)<br>58 W (at 48 V DC)<br>48 W (at 60 V DC)<br>50 W (at 110 V DC)<br>80 W (at 220 V DC)<br>2500 VA (for 250 V AC)                                                                                                            |
| Interrupting rating (ohmic load) max. bridged | 144 W (for 24 V DC. Value applies to connections 12. If connections 12 are bridged, the normal value applies.)<br>1500 VA (for 250 V AC. Value applies to connections 12. If connections 12 are bridged, the normal value applies.)           |
| Switching capacity                            | 2 A (at 24 V, DC13)<br>0.2 A (at 110 V, DC13)<br>0.2 A (at 250 V, DC13)<br>6 A (at 24 V, AC15)<br>6 A (at 120 V, AC15)<br>6 A (at 250 V, AC15)                                                                                                |

## Connection data

|                                  |                                                                                                                                                                               |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connection method                | Screw connection                                                                                                                                                              |
| Stripping length                 | 8 mm                                                                                                                                                                          |
| Screw thread                     | M3                                                                                                                                                                            |
| Conductor cross section rigid    | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                                                                                                                                  |
| Conductor cross section flexible | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup><br>0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> (Single ferrule)<br>2x 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (TWIN ferrule) |
| Conductor cross section AWG      | 26 ... 14                                                                                                                                                                     |
| Tightening torque                | 0.45 Nm ... 0.55 Nm (Usually these terminal blocks must be supported during conductor connection (held by one hand, supported on the housing))                                |

## Dimensions

|       |       |
|-------|-------|
| Width | 14 mm |
|-------|-------|

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

|        |       |
|--------|-------|
| Height | 80 mm |
| Depth  | 94 mm |

## Material specifications

|                                        |                 |
|----------------------------------------|-----------------|
| Color                                  | gray (RAL 7042) |
| Flammability rating according to UL 94 | V0 (Housing)    |

## Environmental and real-life conditions

### Ambient conditions

|                                              |                                |
|----------------------------------------------|--------------------------------|
| Degree of protection (Relay)                 | RT II (Relay)                  |
| Degree of protection (Relay base)            | IP20 (Relay base)              |
| Degree of protection (Installation location) | ≥ IP54 (Installation location) |
| Ambient temperature (operation)              | -40 °C ... 50 °C               |
| Ambient temperature (storage/transport)      | -40 °C ... 85 °C               |
| Altitude                                     | ≤ 2000 m                       |

## Approvals

### CE

|             |              |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

### UKCA

|             |                |
|-------------|----------------|
| Certificate | UKCA-compliant |
|-------------|----------------|

### Shipbuilding approval

|             |            |
|-------------|------------|
| Certificate | TAE0000196 |
|-------------|------------|

### Corrosive gas test

|                |                            |
|----------------|----------------------------|
| Identification | ISA-S71.04. G3 Harsh Group |
|                | EN 60068-2-60              |

### DNV GL data

|             |                                                                                         |
|-------------|-----------------------------------------------------------------------------------------|
| Temperature | D                                                                                       |
| Humidity    | A                                                                                       |
| Vibration   | B/C                                                                                     |
| EMC         | B                                                                                       |
| Enclosure   | Required protection according to the Rules shall be provided upon installation on board |

## EMC data

|                               |                                        |
|-------------------------------|----------------------------------------|
| Low Voltage Directive         | Conformance with Low Voltage Directive |
| Electromagnetic compatibility | Conformance with EMC directive         |

## Standards and regulations

### Air clearances and creepage distances between the power circuits

|                       |               |
|-----------------------|---------------|
| Standards/regulations | IEC 60947-5-1 |
|-----------------------|---------------|

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402


<https://www.phoenixcontact.com/us/products/1079402>

## Mounting

|                   |                           |
|-------------------|---------------------------|
| Mounting type     | DIN rail mounting         |
| Assembly note     | in rows with zero spacing |
| Mounting position | any                       |

## Drawings


### Diagram

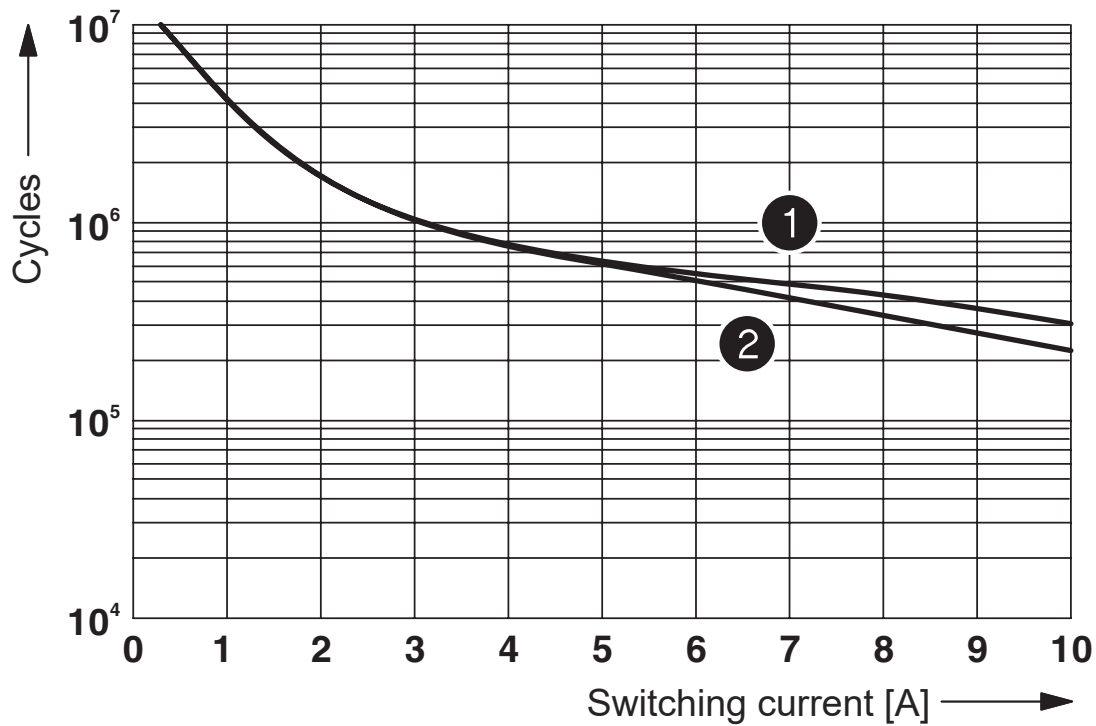

- 1 250 V AC, ohmic load (DC coils)
- 2 250 V AC, ohmic load (AC coils)

### Electrical service life


## Application drawing

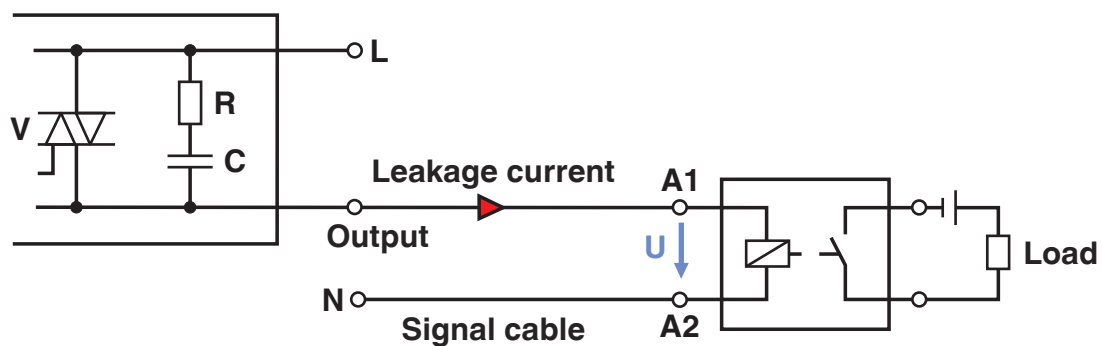

### Occurrence of interference signals


Scenario 1: controller - AC output card

Diagram

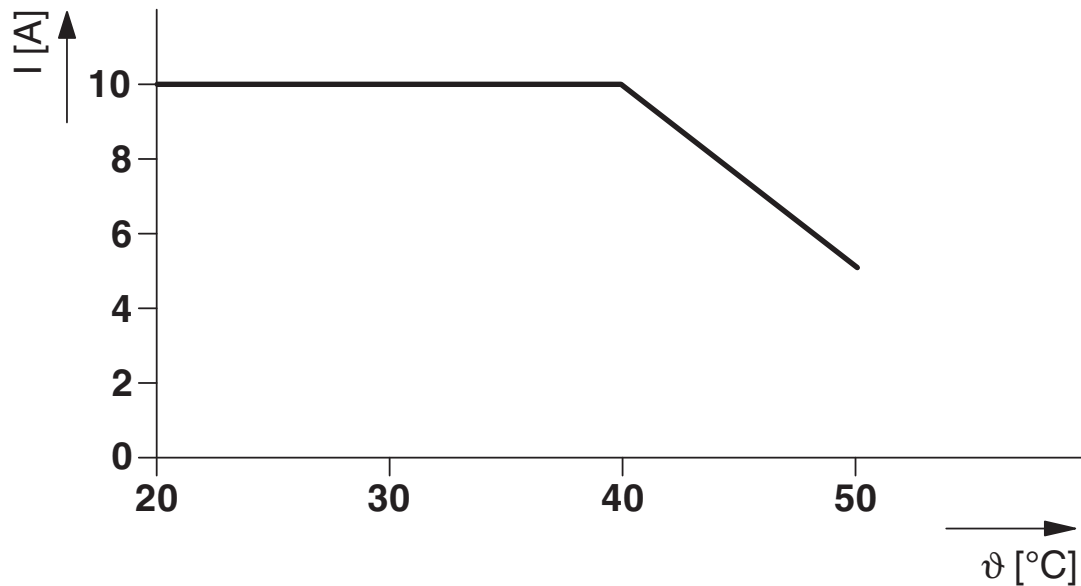


Derating curve

Application drawing

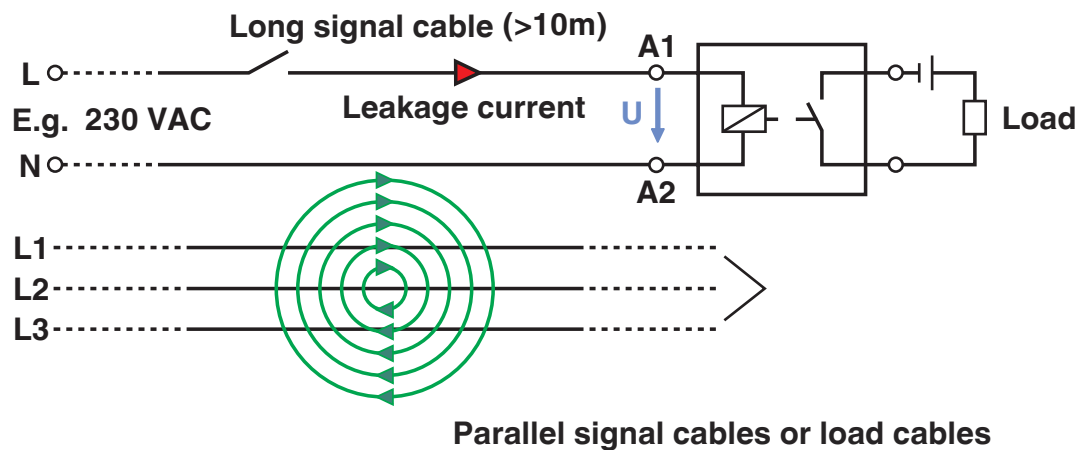


Occurrence of interference signals  
Scenario 2: long signal cables

Circuit diagram

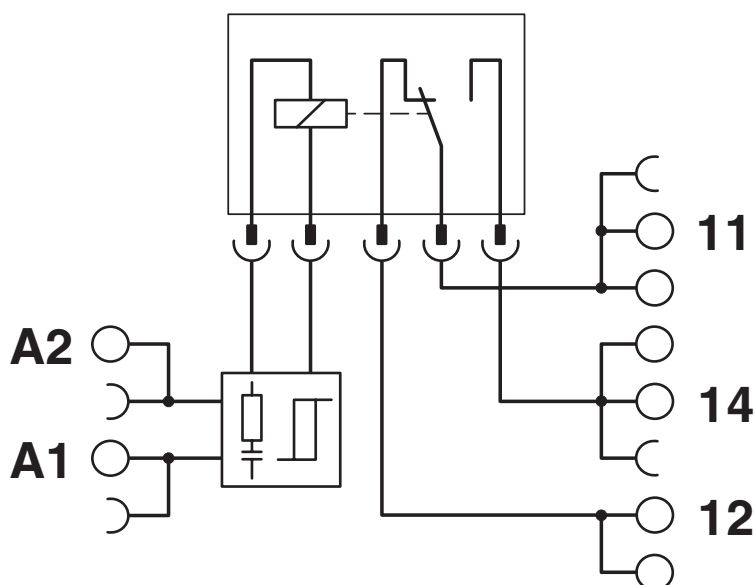

Diagram

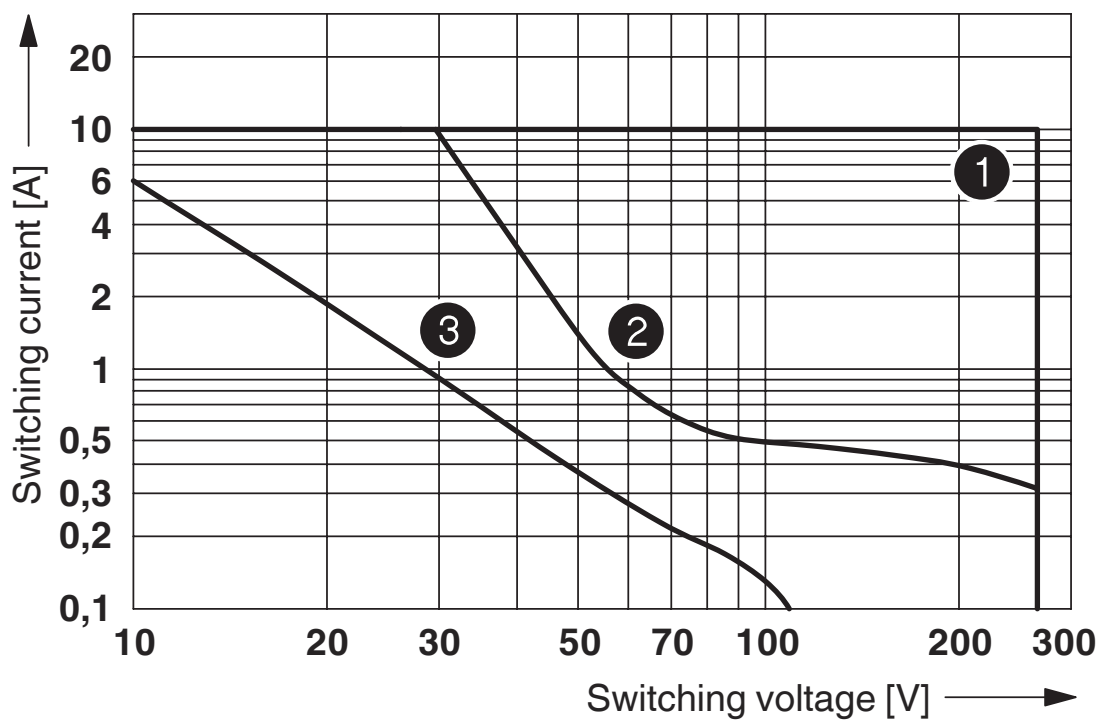

- ① AC, ohmic load
- ② DC, ohmic load
- ③ DC, L/R = 40 ms

Interrupting rating


1079402

<https://www.phoenixcontact.com/us/products/1079402>

Diagram



Service life reduction factor

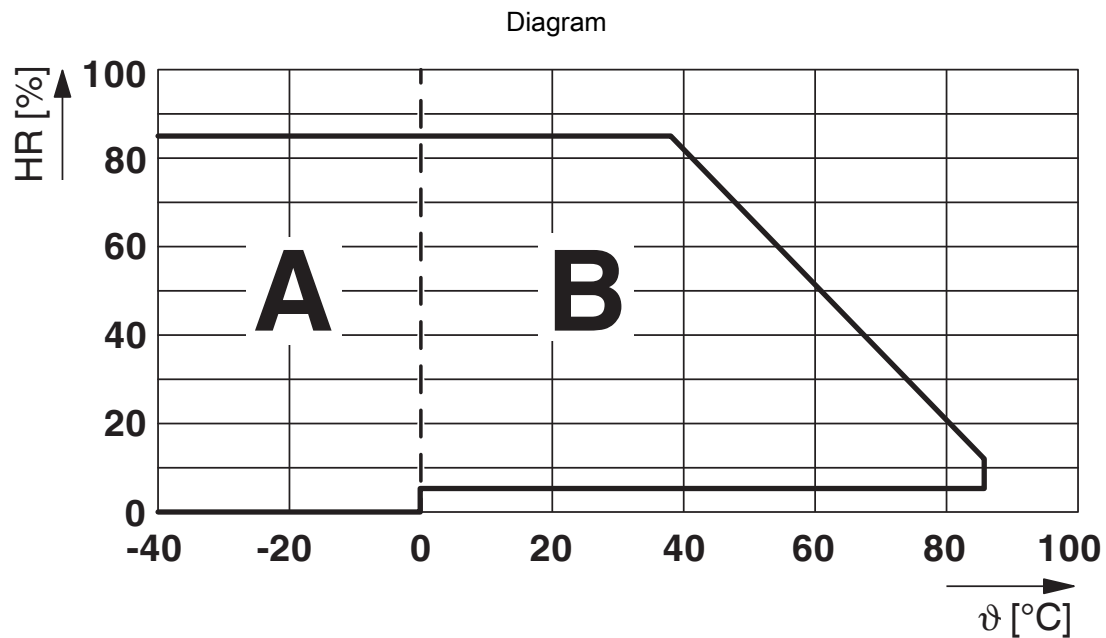

Permissible humidity for operation and storage.

The maximum permissible ambient temperature as specified in the data sheet must be observed.

Area A: Ice buildup at ambient temperatures  $\leq 0^{\circ}\text{C}$  must be prevented

Area B: Condensation at ambient temperatures  $> 0^{\circ}\text{C}$  must be prevented

On 30 full days that are naturally distributed across an entire year, a humidity level of 95% is permissible at an ambient temperature  $\leq 25^{\circ}\text{C}$ .

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1079402>



**cUL Recognized**  
Approval ID: E238705



**UL Recognized**  
Approval ID: E238705



**EAC**  
Approval ID: TR\_TS\_D\_00573\_c



**DNV GL**  
Approval ID: TAE0000196



**EAC**  
Approval ID: RU\*C-DE.\*08.B.00010



**UL Listed**  
Approval ID: FILE E 172140



**cUL Listed**  
Approval ID: FILE E 172140



**cULus Listed**  
Approval ID: E140324

**cULus Recognized**

**cULus Listed**

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27371601 |
| ECLASS-12.0 | 27371601 |
| ECLASS-13.0 | 27371601 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001437 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122300 |
|-------------|----------|

Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes                                                                                                                                                                                                                               |
| Exemption                               | 7(a), 7(c)-I                                                                                                                                                                                                                      |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-50                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)                                                                                                                                                                                                              |
| SCIP                                    | b51159e2-b7f5-470d-9b88-2dab842f4ad5                                                                                                                                                                                              |

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## Accessories




Note: Applying some accessories below might limit this product.

### FBST 500-PLC BU - Continuous plug-in bridge

2966692

<https://www.phoenixcontact.com/us/products/2966692>



Continuous plug-in bridge, length: 500 mm, color: blue



Max. current carrying capacity: 32 A

---

### FBST 500-PLC GY - Continuous plug-in bridge

2966838

<https://www.phoenixcontact.com/us/products/2966838>



Continuous plug-in bridge, length: 500 mm, color: gray



Max. current carrying capacity: 32 A

# PLC-RSC-230AC/21HC/SO46/HI - Relay module




1079402

<https://www.phoenixcontact.com/us/products/1079402>

## FBST 6-PLC RD - Single plug-in bridge

2966236

<https://www.phoenixcontact.com/us/products/2966236>



Single plug-in bridge, number of positions: 2, length: 6 mm, color: red

 Max. current carrying capacity: 6 A

---

## FBST 6-PLC BU - Single plug-in bridge

2966812

<https://www.phoenixcontact.com/us/products/2966812>



Single plug-in bridge, number of positions: 2, length: 6 mm, color: blue

 Max. current carrying capacity: 6 A

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402


<https://www.phoenixcontact.com/us/products/1079402>

## FBST 6-PLC GY - Single plug-in bridge

2966825

<https://www.phoenixcontact.com/us/products/2966825>

Single plug-in bridge, number of positions: 2, length: 6 mm, color: gray



 Max. current carrying capacity: 6 A

---

## FBST 8-PLC GY - Single plug-in bridge

2967688

<https://www.phoenixcontact.com/us/products/2967688>

Single plug-in bridge, number of positions: 2, length: 8 mm, color: gray



 Max. current carrying capacity: 6 A

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## FBST 14-PLC BK - Single plug-in bridge

2967691

<https://www.phoenixcontact.com/us/products/2967691>

Single plug-in bridge, number of positions: 2, length: 14 mm, color: black



 Max. current carrying capacity: 10 A

---

## ZB 10:UNBEDRUCKT - Zack marker strip

1053001

<https://www.phoenixcontact.com/us/products/1053001>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10.5 x 10.15 mm, Number of individual labels: 10

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## ZB 10 CUS - Zack marker strip

0824941

<https://www.phoenixcontact.com/us/products/0824941>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

---

## ZB10,LGS:FORTL.ZAHLEN - Zack marker strip

1053014

<https://www.phoenixcontact.com/us/products/1053014>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## ZB10,QR:FORTL.ZAHLEN - Zack marker strip

1053027

<https://www.phoenixcontact.com/us/products/1053027>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

---

## ZB10,LGS:L1-N,PE - Marker for terminal blocks

1053412

<https://www.phoenixcontact.com/us/products/1053412>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## ZB10,LGS:U-N - Marker for terminal blocks

1053438

<https://www.phoenixcontact.com/us/products/1053438>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

---

## UC-TM 10 - Marker for terminal blocks

0818069

<https://www.phoenixcontact.com/us/products/0818069>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## UC-TM 10 CUS - Marker for terminal blocks

0824605

<https://www.phoenixcontact.com/us/products/0824605>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48

---

## UCT-TM 10 - Marker for terminal blocks

0829142

<https://www.phoenixcontact.com/us/products/0829142>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 8.9 x 9.6 mm, Number of individual labels: 36

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## UCT-TM 10 CUS - Marker for terminal blocks

0829623

<https://www.phoenixcontact.com/us/products/0829623>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 8.9 x 9.6 mm, Number of individual labels: 36

---

## ZB 12:UNPRINTED - Zack marker strip

0812120

<https://www.phoenixcontact.com/us/products/0812120>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 12.2 mm, lettering field size: 12 x 10.5 mm, Number of individual labels: 5

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## ZB 12 CUS - Zack marker strip

0824942

<https://www.phoenixcontact.com/us/products/0824942>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12.2 mm, lettering field size: 10.5 x 12.15 mm, Number of individual labels: 5

---

## ZB 12,LGS:L1-N,PE - Zack marker strip

0812146

<https://www.phoenixcontact.com/us/products/0812146>



Zack marker strip, Strip, white, labeled, printed horizontally: L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 12.2 mm, lettering field size: 10.5 x 12.15 mm, Number of individual labels: 5

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## UC-TM 12 - Marker for terminal blocks

0819194

<https://www.phoenixcontact.com/us/products/0819194>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 12 mm, lettering field size: 11.45 x 10.5 mm, Number of individual labels: 40

---

## UC-TM 12 CUS - Marker for terminal blocks

0824613

<https://www.phoenixcontact.com/us/products/0824613>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12 mm, lettering field size: 11.45 x 10.5 mm, Number of individual labels: 40

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## UCT-TM 12 - Marker for terminal blocks

0829144

<https://www.phoenixcontact.com/us/products/0829144>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 12 mm, lettering field size: 10.8 x 9.6 mm, Number of individual labels: 30

---

## UCT-TM 12 CUS - Marker for terminal blocks

0829630

<https://www.phoenixcontact.com/us/products/0829630>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12 mm, lettering field size: 10.8 x 9.6 mm, Number of individual labels: 30

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



---

## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

---

## PLC-ATP BK - Separating plate

2966841

<https://www.phoenixcontact.com/us/products/2966841>



Separating plate, 2 mm thick, required at the start and end of a PLC terminal strip. Furthermore, it is used for: visual separation of groups, safe isolation of different voltages of neighboring PLC relays in acc. with DIN VDE 0106-101, isolation

## PLC-RSC-230AC/21HC/SO46/HI - Relay module

1079402

<https://www.phoenixcontact.com/us/products/1079402>



## PLC-ESK GY - Power terminal block

2966508

<https://www.phoenixcontact.com/us/products/2966508>



Power terminal block, for the input of up to four potentials, for mounting on NS 35/7.5

---

## SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/us/products/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

# PLC-RSC-230AC/21HC/SO46/HI - Relay module



1079402

<https://www.phoenixcontact.com/us/products/1079402>

## REL-MR-110DC/21HC - Single relay

2961338

<https://www.phoenixcontact.com/us/products/2961338>



Plug-in miniature power relay, with power contact for high continuous currents, 1 changeover contact, input voltage 110 V DC

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)