

CUC-F-D1ZNI-S/R4GCHP8 - RJ45 coupling



1086111
<https://www.phoenixcontact.com/pc/products/1086111>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



RJ45 coupling, degree of protection: IP20, number of positions: 8, 10 Gbps, CAT6_A, material: Metal, connection method: Coupling, cable outlet: straight, Freenet design for use with IP67 panel mounting frame and terminal outlets, Ethernet

Your advantages

- Compact design
- Freenet adapter for integration into IP6X panel mounting frame
- Rugged design
- 10 Gbps
- Assembly without special tools
- CAT6A in accordance with ISO/IEC 11801
- 360° shielding

Commercial data

Item number	1086111
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	ABNACB
GTIN	4055626877129
Weight per piece (including packing)	15.2 g
Weight per piece (excluding packing)	15.2 g
Customs tariff number	85366930
Country of origin	PL

CUC-F-D1ZNI-S/R4GCHP8 - RJ45 coupling



1086111

<https://www.phoenixcontact.com/pc/products/1086111>

Technical data

Product properties

Product type	Female insert
Type	RJ45
Sensor type	Ethernet
Number of positions	8
Connection profile	RJ45
Number of slots	2
Cable outlet	straight

Data management status

Article revision	01
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	2

Electrical properties

Rated voltage (III/3)	72 V (DC)
Rated surge voltage	0.8 kV
Rated current	1 A (at 60 °C)
Max. operating voltage $U_{\max}$	72 V DC
Frequency range	500 MHz
Insulation resistance	$\geq 500 \text{ M}\Omega$
Nominal current I_N	0.5 A
Contact resistance	200 m Ω (Trunk in to trunk out)
Transmission characteristics (category)	CAT6 _A

Connection data

Connection technology

Connection method	Coupling
-------------------	----------

Material specifications

Flammability rating according to UL 94	V0
Housing material	Metal
Housing surface material	metal-plated
Contact material	Spring steel
Contact surface material	Gold

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 750
-----------------------------	------------

CUC-F-D1ZNI-S/R4GCHP8 - RJ45 coupling



1086111

<https://www.phoenixcontact.com/pc/products/1086111>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
	IP20
Ambient temperature (operation)	-10 °C ... 60 °C
Ambient temperature (storage/transport)	60 °C

Standards and regulations

Standards/specifications	IEC 60603-7
	DIN EN 50173-1
	ISO/IEC 11801-Am.1
	IEC 60068-2

Mounting


Mounting type	Snap in
---------------	---------

CUC-F-D1ZNI-S/R4GCHP8 - RJ45 coupling

1086111

<https://www.phoenixcontact.com/pc/products/1086111>

Drawings

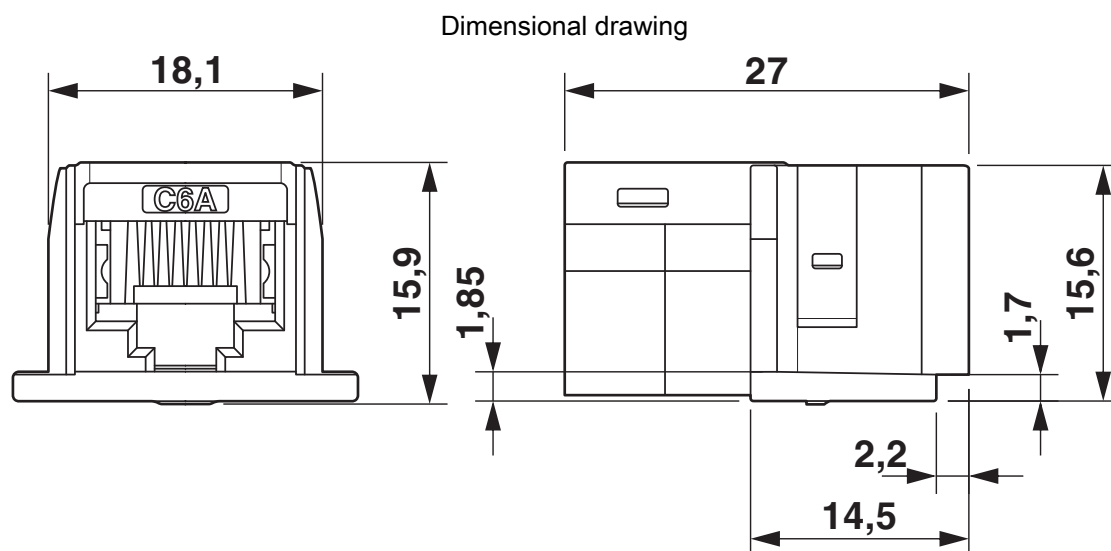

CUC-F-D1ZNI-S/R4GCHP8 - RJ45 coupling



1086111

<https://www.phoenixcontact.com/pc/products/1086111>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1086111>



cUL Recognized
Approval ID: FILE E 335024



UL Recognized
Approval ID: FILE E 335024

cULus Recognized

CUC-F-D1ZNI-S/R4GCHP8 - RJ45 coupling



1086111

<https://www.phoenixcontact.com/pc/products/1086111>

Classifications

ECLASS

ECLASS-11.0	19179090
ECLASS-12.0	19179090
ECLASS-13.0	27061801

ETIM

ETIM 9.0	EC002608
----------	----------

UNSPSC

UNSPSC 21.0	43222600
-------------	----------

CUC-F-D1ZNI-S/R4GCHP8 - RJ45 coupling



1086111

<https://www.phoenixcontact.com/pc/products/1086111>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

CUC-F-D1ZNI-S/R4GCHP8 - RJ45 coupling



1086111

<https://www.phoenixcontact.com/pc/products/1086111>

Accessories

VS-A-F-IP67 - Panel-mount frame

1653744

<https://www.phoenixcontact.com/pc/products/1653744>



Panel mounting frame, IP67, for Freenet system, for round panel cutout, with grommet, without mounting screws, color: gray

VS-A-F-IP67-BK - Panel-mount frame

1658668

<https://www.phoenixcontact.com/pc/products/1658668>



Panel mounting frame, IP67, for Freenet system, for round panel cutout, with grommet, without mounting screws, color: black

CUC-F-D1ZNI-S/R4GCHP8 - RJ45 coupling

1086111

<https://www.phoenixcontact.com/pc/products/1086111>



VS-PPC-F1-RJ45-MNNA-1R-F - Panel-mount frame

1405358

<https://www.phoenixcontact.com/pc/products/1405358>



RJ45 panel mounting frame, IP67, for push-pull interlocking, metal, with the Freenet system, for square panel cutout, with grommet, without mounting screws

VS-PPC-F1-RJ45-MNNA-1C-F - Panel-mount frame

1405222

<https://www.phoenixcontact.com/pc/products/1405222>



RJ45 panel mounting frame, IP67, for push-pull interlocking, metal, with Freenet system, for round mounting cutout, with seal

CUC-F-D1ZNI-S/R4GCHP8 - RJ45 coupling

1086111

<https://www.phoenixcontact.com/pc/products/1086111>



VS-PPC-F1-RJ45-POBK-1R-F - Panel-mount frame

1608197

<https://www.phoenixcontact.com/pc/products/1608197>



RJ45 panel mounting frame, IP67, for push-pull interlocking, plastic, with the Freenet system, for square panel cutout, with grommet, without mounting screws

VS-TO-OW-2-F-9010 - Terminal outlet

1653003

<https://www.phoenixcontact.com/pc/products/1653003>



Terminal outlet, surface mounting, IP20, two slots for contact inserts with the Freenet system

CUC-F-D1ZNI-S/R4GCHP8 - RJ45 coupling

1086111

<https://www.phoenixcontact.com/pc/products/1086111>



VS-TO-IW-2-F-9010 - Terminal outlet

1653016

<https://www.phoenixcontact.com/pc/products/1653016>



Terminal outlet, flush-type mounting, IP20, two slots for contact inserts with the Freenet system

VS-08-RJ45-10G/Q - RJ45 connector

1419001

<https://www.phoenixcontact.com/pc/products/1419001>



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 10 Gbps, CAT6_A, material: Plastic, connection method: Insulation displacement connection, connection cross section: AWG 26- 24, cable outlet: straight, color: black, Ethernet

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com