

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE module for the SIMATIC ET200SP HA with screw connections and male D-SUB connector, for mounting on NS 35 rails, 37-pos.

Your advantages

- These VARIOFACE modules are used in combination with the relevant front adapters

Commercial data

Item number	1100967
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CK211S
GTIN	4055626953298
Weight per piece (including packing)	203.2 g
Weight per piece (excluding packing)	203 g
Customs tariff number	85366990
Country of origin	US

1100967

<https://www.phoenixcontact.com/pc/products/1100967>

Technical data

Product properties

Product type	Interface module
Product family	VARIOFACE Professional
Number of positions	37
No. of channels	8
	16
	32

Data management status

Article revision	03
------------------	----

Electrical properties

Nominal voltage U_N	25 V AC
	60 V DC
Max. current carrying capacity per branch	2 A

Supported controller SIEMENS ET 200SP HA

Suitable terminal block	6DL1193-6TP00-0BH1
	6DL1193-6TP00-0DH1
	6DL1193-6TP00-0BM1
	6DL1193-6TP00-0DM1
Suitable I/O module	6DL1131-6BH00-0PH1 (Terminal Block H1/M1)
	6DL1131-6BL00-0PH1 (Terminal Block H1/M1)
	6DL1131-6TH00-0PH1 (Terminal Block H1/M1)
	6DL1132-6BH00-0PH1 (Terminal Block H1/M1)
	6DL1132-6BL00-0PH1 (Terminal Block H1/M1)
	6DL1133-6EW00-0PH1 (Terminal Block H1/M1)
	6DL1134-6JH00-0PH1 (Terminal Block H1/M1)
	6DL1134-6TH00-0PH1 (Terminal Block H1/M1)
	6DL1135-6TF00-0PH1 (Terminal Block H1/M1)

Connection data

Field level

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Controller level

1100967

<https://www.phoenixcontact.com/pc/products/1100967>

Connection method	D-SUB pin strip
Number of connections	1
Number of positions	37

Signaling

Status display	no
Status display present	No

Dimensions

Item dimensions	
Width	101 mm
Height	65.5 mm
Depth	45.1 mm

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V0

Environmental and real-life conditions

Ambient conditions	
Ambient temperature (operation)	-20 °C ... 70 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Standards and regulations

Standards/regulations	DIN EN 50178
-----------------------	--------------

Mounting


Mounting type	DIN rail mounting
Mounting position	any

Notes

General	Standard or halogen-free cables
Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.

Drawings

Circuit diagram

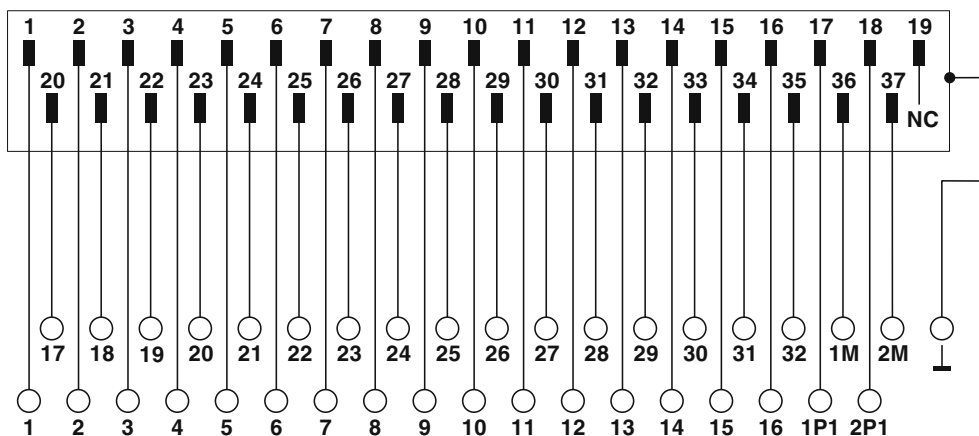

1100967

<https://www.phoenixcontact.com/pc/products/1100967>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1100967>

	CSA Approval ID: 2122203			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	105 V	2 A	28 - 14	-

	cUL Recognized Approval ID: E238705			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	125 V	2 A	30 - 12	-

	UL Recognized Approval ID: E238705			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	125 V	2 A	30 - 12	-

	CSAus Approval ID: 2122203			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	105 V	2 A	28 - 14	-

cULus Recognized**cCSAus**

1100967

<https://www.phoenixcontact.com/pc/products/1100967>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

ETIM

ETIM 8.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

1100967

<https://www.phoenixcontact.com/pc/products/1100967>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	6b552c94-d278-45ec-a868-aac8d0f6751a

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

Mandatory accessories

FLKM-PA-D37/ETHA - Front adapter

1076338

<https://www.phoenixcontact.com/pc/products/1076338>



VARIOFACE front adapter for Siemens SIMATIC® ET 200SP HA, with a 37-pos. D-SUB male strip for digital 24 V DC and analog peripheral modules, max. 32 channels can be connected

Accessories

CABLE-D37SUB/B/B/ 100/KONFEK/S - Cable

2305509

<https://www.phoenixcontact.com/pc/products/2305509>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 1 m

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

CABLE-D37SUB/B/B/ 200/KONFEK/S - Cable

2305512

<https://www.phoenixcontact.com/pc/products/2305512>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 2 m

CABLE-D37SUB/B/B/ 300/KONFEK/S - Cable

2305525

<https://www.phoenixcontact.com/pc/products/2305525>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 3 m

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

CABLE-D37SUB/B/B/ 400/KONFEK/S - Cable

2900759

<https://www.phoenixcontact.com/pc/products/2900759>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 4 m

CABLE-D37SUB/B/B/ 600/KONFEK/S - Cable

2900760

<https://www.phoenixcontact.com/pc/products/2900760>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 6 m

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

CABLE-D37SUB/B/B/ 800/KONFEK/S - Cable

2900761

<https://www.phoenixcontact.com/pc/products/2900761>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 8 m

CABLE-D37SUB/B/B/1000/KONFEK/S - Cable

2900762

<https://www.phoenixcontact.com/pc/products/2900762>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 10 m

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

CABLE-D37SUB/B/B/1500/KONFEK/S - Cable

2900763

<https://www.phoenixcontact.com/pc/products/2900763>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 15 m

CABLE-D37SUB/B/B/2000/KONFEK/S - Cable

2900764

<https://www.phoenixcontact.com/pc/products/2900764>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 20 m

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

CABLE-D37SUB/B/B/2500/KONFEK/S - Cable

2902074

<https://www.phoenixcontact.com/pc/products/2902074>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 25 m

CABLE-D37SUB/B/B/3000/KONFEK/S - Cable

2902075

<https://www.phoenixcontact.com/pc/products/2902075>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 30 m

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

CABLE-D37SUB/B/B/3500/KONFEK/S - Cable

2902076

<https://www.phoenixcontact.com/pc/products/2902076>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 35 m

CABLE-D37SUB/B/B/4000/KONFEK/S - Cable

2902077

<https://www.phoenixcontact.com/pc/products/2902077>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 40 m

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

CABLE-D37SUB/B/B/HF/S/ 1,0M - Cable

2908516

<https://www.phoenixcontact.com/pc/products/2908516>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 1 m

CABLE-D37SUB/B/B/HF/S/ 2,0M - Cable

2908517

<https://www.phoenixcontact.com/pc/products/2908517>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 2 m

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

CABLE-D37SUB/B/B/HF/S/ 3,0M - Cable

2908518

<https://www.phoenixcontact.com/pc/products/2908518>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 3 m

CABLE-D37SUB/B/B/HF/S/10,0M - Cable

2908522

<https://www.phoenixcontact.com/pc/products/2908522>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 10 m

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

CABLE-D37SUB/B/B/HF/S/15,0M - Cable

2908523

<https://www.phoenixcontact.com/pc/products/2908523>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 15 m

CABLE-D37SUB/B/B/HF/S/20,0M - Cable

2908525

<https://www.phoenixcontact.com/pc/products/2908525>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 20 m

VIP-2/SC/D37SUB/M/ET200SP-HA - Interface module



1100967

<https://www.phoenixcontact.com/pc/products/1100967>

CABLE-D37SUB/B/B/HF/S/25,0M - Cable

2908526

<https://www.phoenixcontact.com/pc/products/2908526>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 25 m

CABLE-D37SUB-B-B-HF-S/... - Cable

1075563

<https://www.phoenixcontact.com/pc/products/1075563>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: variable

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com