

1103440

https://www.phoenixcontact.com/us/products/1103440

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail housing, Lower housing part with metal foot catch, with vents, width: 18.9 mm, height: 120.6 mm, depth: 82.85 mm, color: light gray (similar RAL 7035), cross connection: DIN rail connector (optional), number of positions cross connector: 5 or 8

### Your advantages

- · Easy, tool-free mounting
- · Optional DIN rail connector for easy module-to-module communication
- · Lock and Release principle for automatic latching and intuitive release of the front connection plug
- Plastic in accordance with UL94 V0: for more rigorous flammability requirements
- · Versatile use: deeper design for more PCB space
- Greater flexibility: combination with ICS series electronics housing using DIN rail connectors

### Commercial data

Item number	1103440
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	AC15
Product key	ACHEBA
GTIN	4055626966601
Weight per piece (including packing)	43.97 g
Weight per piece (excluding packing)	33.2 g
Customs tariff number	85389099
Country of origin	CN



1103440

https://www.phoenixcontact.com/us/products/1103440

### Technical data

#### Notes

Assembly note	Refer to the data sheet for the range in the download area.
Recommendation	Material of contact pads for bus connector, galvanic gold (hard gold)


### Product properties

Product type	Enclosure bottom part
Housing type	DIN rail housing
Housing series	ME-IO
Max. number of positions	48 (pitch: 3.45 mm)
	32 (pitch: 5 mm)
Туре	Lower housing part with metal foot catch
Ventilation openings present	yes

#### Data management status

Article revision	02

### **Dimensions**



Width	18.9 mm
Height	120.6 mm
Depth	82.85 mm
Depth from top edge of DIN rail	76.25 mm

### PCB design

PCB thickness 1.4 mm 1.	8 mm
-------------------------	------

### Material specifications

Color (Housing)	light gray (RAL 7035)
Flammability rating according to UL 94	V0
Housing material	Polyamide
Surface characteristics	untreated

### Environmental and real-life conditions

Power dissipation single housing for 20 °C



1103440

https://www.phoenixcontact.com/us/products/1103440

Ambient temperature	20 °C
Reduction factor	1
Mounting position	vertical
Power dissipation	11.8 W
Power dissipation single housing for 30 °C	
Ambient temperature	30 °C
Reduction factor	0.81
Mounting position	vertical
Power dissipation	9.6 W
Power dissipation single housing for 40 °C	
Ambient temperature	40 °C
Reduction factor	0.63
Mounting position	vertical
Power dissipation	7.5 W
Power dissipation single housing for 50 °C	
Ambient temperature	50 °C
Reduction factor	0.46
Mounting position	vertical
Power dissipation	5.5 W
Power dissipation single housing for 60 °C	
Ambient temperature	60 °C
Reduction factor	0.31
Mounting position	vertical
Power dissipation	3.7 W
Vibration test	
Specification	IEC 60068-2-6:2007-12
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.15 mm (10 Hz 58.1 Hz)
Acceleration	2g (58.1 Hz 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Glow-wire test	
Specification	IEC 60695-2-11:2014-02
Temperature	850 °C
Time of exposure	30 s
Thermal stability / ball thrust test	
Specification	IEC 60695-10-2:2014-02
Temperature	125 °C
Test duration	1 h



1103440

https://www.phoenixcontact.com/us/products/1103440

Force	20 N
Mechanical strength / tumbling barrel	
Specification	IEC 60068-2-31:2008-05
Height of fall	50 cm
Frequency	50
Shocks	
Specification	IEC 60068-2-27:2008-02
Pulse shape	Semi-sinusoidal
Acceleration	15g
Shock duration	11 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Test for substances that would hinder coating with paint or v	varnish
Specification	VDMA 24364:2018-05
Degree of protection (IP code)	
Specification	IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08
Ambient conditions	
Max. IP code to attain	IP20
Ambient temperature (operation)	-40 °C 105 °C (depending on power dissipation)
Ambient temperature (storage/transport)	-40 °C 55 °C
Ambient temperature (assembly)	-5 °C 100 °C
Relative humidity (storage/transport)	80 %
CB data	
Number of PCB holders	1
Type of PCB mount	Latching
Total PCB surface	8500 mm²
Thickness of the PCB	1.4 mm 1.8 mm
ounting	
Mounting type	DIN rail mounting
ickaging specifications	
Type of packaging	packed in cardboard
Outer packaging type	Carton
Outer packaging type	Gaiton




1103440

https://www.phoenixcontact.com/us/products/1103440

## Drawings

### Dimensional drawing

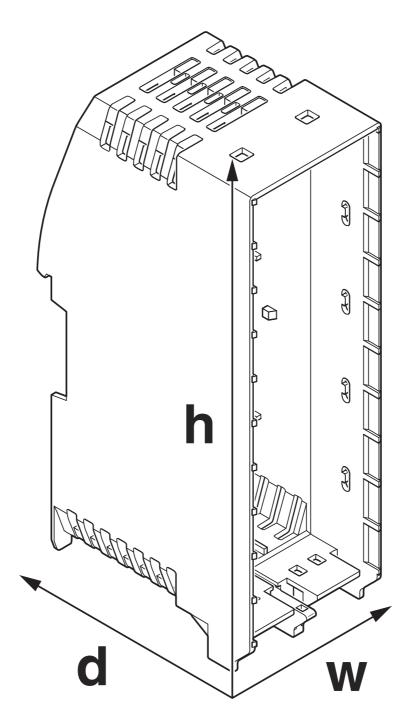


Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.




1103440

https://www.phoenixcontact.com/us/products/1103440

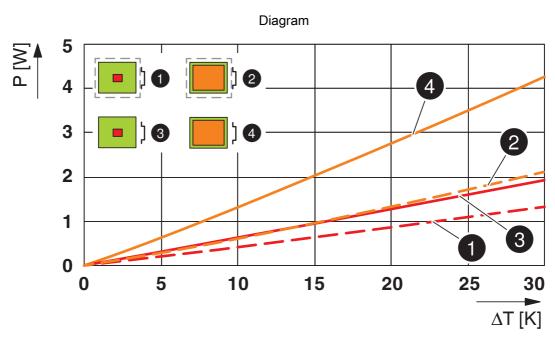

Power dissipation diagram for 0 K ... 30 K

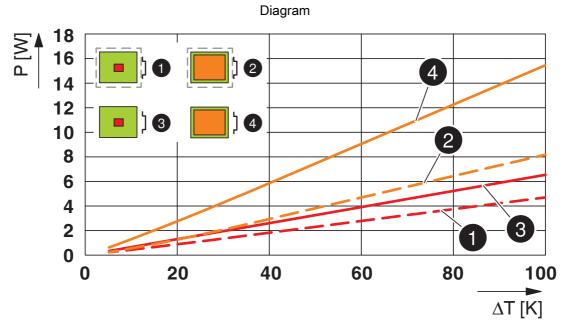

Power dissipation diagram for 0 K ... 100 K



1103440

https://www.phoenixcontact.com/us/products/1103440

## Classifications

### **ECLASS**

	ECLASS-11.0	27182702	
	ECLASS-13.0	27190601	
ETIM			
	ETIM 9.0	EC001031	
UNSPSC			
Oi	101 00		
	UNSPSC 21.0	31261500	



1103440

https://www.phoenixcontact.com/us/products/1103440

## Environmental product compliance

EU RoHS				
Fulfills EU RoHS substance requirements	Yes, No exemptions			
China RoHS				
Environment friendly use period (EFUP)	EFUP-E			
	No hazardous substances above the limits			
EU REACH SVHC				
REACH candidate substance (CAS No.)	No substance above 0.1 wt%			



1103440

https://www.phoenixcontact.com/us/products/1103440

### Mandatory accessories

ME-IO 18,8 F-LR 7035 - Filler plug

2202635

https://www.phoenixcontact.com/us/products/2202635



DIN rail housing, Filler plug, for closing the Lock and Release area, width: 11.7 mm, height: 16.1 mm, depth: 10.6 mm, color: light gray (similar RAL 7035)

### Accessories

ME-IO 18,8 C 2U 7035 - Housing cover

2201799

https://www.phoenixcontact.com/us/products/2201799



DIN rail housing, 2U, Housing cover, width: 18.9 mm, height: 21.8 mm, depth: 26 mm, color: light gray (similar RAL 7035)



1103440

https://www.phoenixcontact.com/us/products/1103440

## ME-IO 18,8 C 3U 7035 - Housing cover

2201800

https://www.phoenixcontact.com/us/products/2201800



DIN rail housing, 3U, Housing cover, width: 18.9 mm, height: 32.8 mm, depth: 26 mm, color: light gray (similar RAL 7035)

### ME-IO 18,8 C 3U S1 7035 - Housing cover

2201801

https://www.phoenixcontact.com/us/products/2201801



DIN rail housing, 3U, Housing cover, width: 18.9 mm, height: 32.8 mm, depth: 26 mm, color: light gray (similar RAL 7035)



1103440

https://www.phoenixcontact.com/us/products/1103440

## ME-IO 18,8 C 4U 7035 - Housing cover

2201802

https://www.phoenixcontact.com/us/products/2201802



DIN rail housing, 4U, Housing cover, width: 18.9 mm, height: 43.8 mm, depth: 26 mm, color: light gray (similar RAL 7035)

### ME-IO 18,8 C 5U 7035 - Housing cover

2201803

https://www.phoenixcontact.com/us/products/2201803



DIN rail housing, 5U, Housing cover, width: 18.9 mm, height: 54.8 mm, depth: 26 mm, color: light gray (similar RAL 7035)



1103440

https://www.phoenixcontact.com/us/products/1103440

### ME-IO 18,8 C 6U 7035 - Housing cover

2201804

https://www.phoenixcontact.com/us/products/2201804



DIN rail housing, 6U, Housing cover, width: 18.9 mm, height: 65.8 mm, depth: 26 mm, color: light gray (similar RAL 7035)

### ME-IO 18,8 C 7U 7035 - Housing cover

2201805

https://www.phoenixcontact.com/us/products/2201805



DIN rail housing, 7U, Housing cover, width: 18.9 mm, height: 76.8 mm, depth: 26 mm, color: light gray (similar RAL 7035)



1103440

https://www.phoenixcontact.com/us/products/1103440

## ME-IO 18,8 C 9U 7035 - Housing cover

2201806

https://www.phoenixcontact.com/us/products/2201806



DIN rail housing, 9U, Housing cover, width: 18.9 mm, height: 98.8 mm, depth: 26 mm, color: light gray (similar RAL 7035)

### ME-IO 18,8 C 2U MC18 7035 - Housing cover

2202581

https://www.phoenixcontact.com/us/products/2202581



DIN rail housing, 2U for marking lid, Housing cover, width: 18.9 mm, height: 21.9 mm, depth: 26 mm, color: light gray (similar RAL 7035)



1103440

https://www.phoenixcontact.com/us/products/1103440

### ME-IO 18,8 C 2U MC10 7035 - Housing cover

2202582

https://www.phoenixcontact.com/us/products/2202582



DIN rail housing, 2U for marking lid, Housing cover, width: 18.9 mm, height: 21.9 mm, depth: 26 mm, color: light gray (similar RAL 7035)

### ME-IO 18,8 C 2U MC 7035 - Housing cover

2202616

https://www.phoenixcontact.com/us/products/2202616



DIN rail housing, 2U for marking lid, Housing cover, width: 18.9 mm, height: 21.9 mm, depth: 26 mm, color: light gray (similar RAL 7035)



1103440

https://www.phoenixcontact.com/us/products/1103440

### ME-IO 18,8 MC 8U TRANS - Marking lid

2202627

https://www.phoenixcontact.com/us/products/2202627



DIN rail housing, 8U, Marking lid, width: 18.8 mm, height: 110.95 mm, color: transparent

### ME-IO 18,8 C 10U 7035 - Housing cover

2202630

https://www.phoenixcontact.com/us/products/2202630



DIN rail housing, 10U, Housing cover, width: 18.9 mm, height: 109.8 mm, depth: 26 mm, color: light gray (similar RAL 7035)



1103440

https://www.phoenixcontact.com/us/products/1103440

#### ME-IO 18,8 C 8U 7035 - Housing cover

#### 2202634

https://www.phoenixcontact.com/us/products/2202634



DIN rail housing, 8U, Housing cover, width: 18.9 mm, height: 87.8 mm, depth: 26 mm, color: light gray (similar RAL 7035)

#### HSCP-SP 2,5-1U02-7035 - PCB connector

#### 1081099

https://www.phoenixcontact.com/us/products/1081099



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 2, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-62/62-7035 - PCB connector

1081107

https://www.phoenixcontact.com/us/products/1081107



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red/blue, red

#### HSCH 2,5-2U-22TT 9005 - PCB header

1087700

https://www.phoenixcontact.com/us/products/1087700



PCB headers, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Mixed pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-24/24-7035 - PCB connector

1088581

https://www.phoenixcontact.com/us/products/1088581



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: red, yellow / red, yellow

#### HSCP-SP 2,5-1U4-56/56-7035 - PCB connector

1088582

https://www.phoenixcontact.com/us/products/1088582



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, blue / green, blue



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1UTT-02/02-7035 - PCB connector

1135246

https://www.phoenixcontact.com/us/products/1135246



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, red / black, red

#### HSCP-SP 2,5-1U4-99/99-9005 - PCB connector

1211074

https://www.phoenixcontact.com/us/products/1211074



PCB connector, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: white



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-7035 - PCB connector

2201780

https://www.phoenixcontact.com/us/products/2201780



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

#### HSCP-SP 2,5-1UTT-7035 - PCB connector

2201781

https://www.phoenixcontact.com/us/products/2201781



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U20-7035 - PCB connector

2201782

https://www.phoenixcontact.com/us/products/2201782



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 2, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version

#### HSCH 2,5-3U/12 9005 - PCB header

2201788

https://www.phoenixcontact.com/us/products/2201788



PCB headers, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 12, number of rows: 2, number of positions: 12, number of connections: 12, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCH 2,5-2U/ 8 9005 - PCB header

2201789

https://www.phoenixcontact.com/us/products/2201789



PCB headers, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 8, number of rows: 2, number of positions: 8, number of connections: 8, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard

#### HSCH 2,5-2U-TTTT 9005 - PCB header

2201790

https://www.phoenixcontact.com/us/products/2201790



PCB headers, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCH 2,5-2U-2220 9005 - PCB header

2201792

https://www.phoenixcontact.com/us/products/2201792



PCB headers, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Mixed pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version

#### HSCH 1,5-3U/18 9005 - PCB header

2202232

https://www.phoenixcontact.com/us/products/2202232



PCB headers, nominal cross section: 1.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Pin, number of potentials: 18, number of rows: 2, number of positions: 18, number of connections: 18, product range: HSCH 1,5/..-G, pitch: 3.45 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 1,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCH 1,5-2U/12 9005 - PCB header

2202233

https://www.phoenixcontact.com/us/products/2202233



PCB headers, nominal cross section: 1.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Pin, number of potentials: 12, number of rows: 2, number of positions: 12, number of connections: 12, product range: HSCH 1,5/..-G, pitch: 3.45 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 1,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard.

#### HSCP-SP 1,5-1U6-7035 - PCB connector

2202234

https://www.phoenixcontact.com/us/products/2202234



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-44/44-7035 - PCB connector

2202567

https://www.phoenixcontact.com/us/products/2202567



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: yellow, yellow / yellow, yellow

#### HSCP-SP 2,5-1U4-99/99-7035 - PCB connector

2202568

https://www.phoenixcontact.com/us/products/2202568



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: white, white / white, white



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-00/00-7035 - PCB connector

2202569

https://www.phoenixcontact.com/us/products/2202569



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, black / black, black

#### HSCP-SP 2,5-1U4-66/66-7035 - PCB connector

2202570

https://www.phoenixcontact.com/us/products/2202570



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: blue, blue / blue, blue



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-55/55-7035 - PCB connector

2202571

https://www.phoenixcontact.com/us/products/2202571



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green

#### HSCP-SP 2,5-1U4-22/22-7035 - PCB connector

2202572

https://www.phoenixcontact.com/us/products/2202572



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: red, red / red, red



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-99/99-3000 - PCB connector

1003852

https://www.phoenixcontact.com/us/products/1003852



PCB connector, nominal cross section: 2.5 mm², color: flame red, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: white, white / white, white

#### HSCH 2,5-2U/ 8 THR 9005 - PCB header

2203405

https://www.phoenixcontact.com/us/products/2203405



PCB headers, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 250 V, contact surface: Sn, contact connection type: Pin, number of potentials: 8, number of rows: 2, number of positions: 8, number of connections: 8, product range: HSCH 2,5/..-G-THR, pitch: 5 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.3 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 44 mm wide tape



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCH 2,5-3U/12 THR 9005 - PCB header

2203406

https://www.phoenixcontact.com/us/products/2203406



PCB headers, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 250 V, contact surface: Sn, contact connection type: Pin, number of potentials: 12, number of rows: 2, number of positions: 12, number of connections: 12, product range: HSCH 2,5/..-G-THR, pitch: 5 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.3 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 56 mm wide tape

#### HSCH 1,5-3U/18 THR 9005 - PCB header

2203408

https://www.phoenixcontact.com/us/products/2203408



PCB headers, nominal cross section: 1.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Pin, number of potentials: 18, number of rows: 2, number of positions: 18, number of connections: 18, product range: HSCH 1,5/..-G-THR, pitch: 3.45 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.3 mm, number of solder pins per potential: 1, plug-in system: HSC 1,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 56 mm wide tape



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCH 1,5-2U/12 THR 9005 - PCB header

2203409

https://www.phoenixcontact.com/us/products/2203409



PCB headers, nominal cross section: 1.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Pin, number of potentials: 12, number of rows: 2, number of positions: 12, number of connections: 12, product range: HSCH 1,5/..-G-THR, pitch: 3.45 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.3 mm, number of solder pins per potential: 1, plug-in system: HSC 1,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 44 mm wide tape

#### HSCH 2,5-3U-22TT22 9005 - PCB header

2203559

https://www.phoenixcontact.com/us/products/2203559



PCB headers, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 10, number of rows: 2, number of positions: 10, number of connections: 10, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Mixed pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 1,5-1U6-7035 LP1-6 - PCB connector

1022660

https://www.phoenixcontact.com/us/products/1022660



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Printed version, color of the spring lever: orange

#### HSCP-SP 1,5-1U6-7035 LP7-12 - PCB connector

1022661

https://www.phoenixcontact.com/us/products/1022661



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Printed version, color of the spring lever: orange



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 1,5-1U6-7035 LP13-18 - PCB connector

1022662

https://www.phoenixcontact.com/us/products/1022662



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Printed version, color of the spring lever: orange

#### HSCP-SP 2,5-1U4-55/55-7035 LP19-22 - PCB connector

1022663

https://www.phoenixcontact.com/us/products/1022663



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-66/66-7035 LP23-26 - PCB connector

1022664

https://www.phoenixcontact.com/us/products/1022664



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: blue, blue / blue, blue

#### HSCP-SP 2,5-1U4-66/66-7035 LP27-30 - PCB connector

1022665

https://www.phoenixcontact.com/us/products/1022665



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: blue, blue / blue, blue



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1UTT-62/62-7035 LP31-34 - PCB connector

1022666

https://www.phoenixcontact.com/us/products/1022666



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red/blue, red

#### HSCP-SP 2,5-1U4-33/33-7016 - PCB connector

1037429

https://www.phoenixcontact.com/us/products/1037429



PCB connector, nominal cross section: 2.5 mm², color: anthracite grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-09/53-7035 - PCB connector

1037438

https://www.phoenixcontact.com/us/products/1037438



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, white/green, orange

#### HSCP-SP 1,5-1U6-396/396-7035 - PCB connector

1064546

https://www.phoenixcontact.com/us/products/1064546



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: orange, white, blue/orange, white, blue



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 1,5-1U6-545/545-7035 - PCB connector

1064547

https://www.phoenixcontact.com/us/products/1064547



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, yellow, green/green, yellow, green

#### HSCP-SP 1,5-1U6-045/045-7035 - PCB connector

1064548

https://www.phoenixcontact.com/us/products/1064548



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, yellow, green/black, yellow, green



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 1,5-1U6-000/000-7035 - PCB connector

1064549

https://www.phoenixcontact.com/us/products/1064549



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black

#### HSCP-SP 1,5-1U6-336/336-7035 - PCB connector

1100022

https://www.phoenixcontact.com/us/products/1100022



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: orange, orange, blue/orange, orange, blue



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 1,5-1U6-555/555-7035 - PCB connector

1106783

https://www.phoenixcontact.com/us/products/1106783



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green

#### HSCP-SP 2,5-1U20-5B/5B-7035 - PCB connector

1106784

https://www.phoenixcontact.com/us/products/1106784



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 2, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-55/66-7035 - PCB connector

1111838

https://www.phoenixcontact.com/us/products/1111838



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green/blue, blue

#### HSCP-SP 2,5-1U4-22/44-7035 - PCB connector

1111839

https://www.phoenixcontact.com/us/products/1111839



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: red, red/yellow, yellow



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCH 2,5-3U-TTTTTT 9005 - PCB header

1126768

https://www.phoenixcontact.com/us/products/1126768



PCB headers, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version

#### HSCP-SP 2,5-1U4-09/06-7035 - PCB connector

1194411

https://www.phoenixcontact.com/us/products/1194411



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, white / black, blue



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 1,5-1U6-7016 - PCB connector

1205101

https://www.phoenixcontact.com/us/products/1205101



PCB connector, nominal cross section: 1.5 mm², color: anthracite grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

#### HSCP-SP 2,5-1U00-7016 - Filler plug

1205130

https://www.phoenixcontact.com/us/products/1205130



PCB connector, nominal cross section: 2.5 mm<sup>2</sup>, color: anthracite grey, nominal current: 8 A, rated voltage (III/2): 300 V, number of potentials: 0, number of rows: 2, number of positions: 0, number of connections: 0, product range: HSCP-SP 2,5-.., pitch: 5 mm, number of solder pins per potential: 0, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, Filler plugs



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1UTT-7016 - PCB connector

1209685

https://www.phoenixcontact.com/us/products/1209685



PCB connector, nominal cross section: 2.5 mm², color: anthracite grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

#### HSCP-SP 1,5-1U6-629/629-7016 - PCB connector

1209687

https://www.phoenixcontact.com/us/products/1209687



PCB connector, nominal cross section: 1.5 mm², color: anthracite grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red, white/blue, red, white



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1UTT-62/62-7035 LPM-L+ - PCB connector

1294375

https://www.phoenixcontact.com/us/products/1294375



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red/blue, red

#### HSCP-SP 2,5-1U4-00/00-7035 LP1-10 - PCB connector

1294384

https://www.phoenixcontact.com/us/products/1294384



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, black / black, black



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-00/00-7035 LP3-12 - PCB connector

1294390

https://www.phoenixcontact.com/us/products/1294390



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, black / black, black

#### HSCP-SP 2,5-1U4-00/00-7035 LP5-14 - PCB connector

1294391

https://www.phoenixcontact.com/us/products/1294391



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, black / black, black



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-00/00-7035 LP7-16 - PCB connector

1294392

https://www.phoenixcontact.com/us/products/1294392



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, black / black, black

#### HSCP-SP 1,5-1U6-260/260-7035 - PCB connector

1326553

https://www.phoenixcontact.com/us/products/1326553



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: red, blue, black / red, blue, black



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 1,5-1U6-222/222-7035 - PCB connector

1344448

https://www.phoenixcontact.com/us/products/1344448



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: red

#### HSCP-SP 1,5-1U6-444/444-7035 - PCB connector

1344449

https://www.phoenixcontact.com/us/products/1344449



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: yellow



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 1,5-1U6-062/062-7035 - PCB connector

1344923

https://www.phoenixcontact.com/us/products/1344923



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, blue, red / black, blue, red

#### HSCP-SP 2,5-1U4-55/55-7035 TPDC-1 - PCB connector

1361702

https://www.phoenixcontact.com/us/products/1361702



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-55/55-7035 TPDC-2 - PCB connector

1361704

https://www.phoenixcontact.com/us/products/1361704



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green

#### HSCP-SP 2,5-1U4-55/55-7035 TPDC-3 - PCB connector

1361705

https://www.phoenixcontact.com/us/products/1361705



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-55/55-7035 TPDC-4 - PCB connector

1361706

https://www.phoenixcontact.com/us/products/1361706



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green

#### HSCP-SP 2,5-1U4-55/55-7035 TPDC-5 - PCB connector

1361708

https://www.phoenixcontact.com/us/products/1361708



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-55/55-7035 TPDC-6 - PCB connector

1361709

https://www.phoenixcontact.com/us/products/1361709



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green

#### HSCP-SP 2,5-1U4-55/55-7035 TPDC-7 - PCB connector

1361711

https://www.phoenixcontact.com/us/products/1361711



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-55/55-7035 TPDC-8 - PCB connector

1361714

https://www.phoenixcontact.com/us/products/1361714



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green

#### HSCP-SP 1,5-1U6-696/696-7035 - PCB connector

1376979

https://www.phoenixcontact.com/us/products/1376979



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: white, blue / blue, white, blue



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCH 2,5-2U-TT02 9005 - PCB header

2201793

https://www.phoenixcontact.com/us/products/2201793



PCB headers, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Mixed pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version

#### HSCP-SP 2,5-1U4-69/69-7035 - PCB connector

2202605

https://www.phoenixcontact.com/us/products/2202605



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, white/blue, white



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1UTT-62/62-7035 - PCB connector

2202606

https://www.phoenixcontact.com/us/products/2202606



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red/blue, red

#### HSCP-SP 2,5-1UTT-55/55-7035 - PCB connector

2202607

https://www.phoenixcontact.com/us/products/2202607



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-99/62-7035 - PCB connector

2202608

https://www.phoenixcontact.com/us/products/2202608



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: white, white/blue, red

#### HSCP-SP 1,5-1U6-629/629-7035 - PCB connector

2202609

https://www.phoenixcontact.com/us/products/2202609



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red, white/blue, red, white



1103440

https://www.phoenixcontact.com/us/products/1103440

HSCP-SP 2,5-1U00-7035 - Filler plug

2202610

https://www.phoenixcontact.com/us/products/2202610



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 300 V, number of potentials: 0, number of rows: 2, number of positions: 0, number of connections: 0, product range: HSCP-SP 2,5-.., pitch: 5 mm, number of solder pins per potential: 0, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Filler plugs

HSCP-SP 2,5-1U4-29/29-7035 - PCB connector

2203192

https://www.phoenixcontact.com/us/products/2203192



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: red, white/red, white



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-62/59-7035 - PCB connector

2203194

https://www.phoenixcontact.com/us/products/2203194



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red/green, white

#### HSCP-SP 2,5-1U4-65/65-7035 - PCB connector

2203195

https://www.phoenixcontact.com/us/products/2203195



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, green/blue, green



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-66/22-7035 - PCB connector

2203473

https://www.phoenixcontact.com/us/products/2203473



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: blue, blue/red, red

#### HSCP-SP 1,5-1U6-999/999-7035 - PCB connector

2203603

https://www.phoenixcontact.com/us/products/2203603



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: white



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 1,5-1U6-562/562-7035 - PCB connector

2203604

https://www.phoenixcontact.com/us/products/2203604



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0°, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, blue, red/green, blue, red

#### HSCH 2,5-2U-TT22 9005 - PCB header

2203783

https://www.phoenixcontact.com/us/products/2203783



PCB headers, nominal cross section: 2.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Mixed pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HSCP-SP 2,5-1U4-44/44-7016 - PCB connector

2203818

https://www.phoenixcontact.com/us/products/2203818



PCB connector, nominal cross section: 2.5 mm², color: anthracite grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: yellow, yellow / yellow, yellow

#### HSCP-CB 4U-7035 - Fastening clip

1056722

https://www.phoenixcontact.com/us/products/1056722



ME-IO Blockbelt, for 4 PCB connectors, color: light gray (similar RAL 7035)



1103440

https://www.phoenixcontact.com/us/products/1103440

HSCP-CB 3U-7035 - Fastening clip

1056723

https://www.phoenixcontact.com/us/products/1056723



ME-IO Blockbelt, for 3 PCB connectors, color: light gray (similar RAL 7035)

### HSCP-CB 2U-7035 - Fastening clip

1056724

https://www.phoenixcontact.com/us/products/1056724

ME-IO Blockbelt, for 2 PCB connectors, color: light gray (similar RAL 7035)





1103440

https://www.phoenixcontact.com/us/products/1103440

### HSCP-CB 5U-7035 - Fastening clip

1056892

https://www.phoenixcontact.com/us/products/1056892



ME-IO Blockbelt, for 5 PCB connectors, color: light gray (similar RAL 7035)

### HSC-LR 9U KIT 2003 - Locking

2201794

https://www.phoenixcontact.com/us/products/2201794



DIN rail housing, 9U, Lock and Release system, width: 16.1 mm, height: 111.8 mm, depth: 8.8 mm, color: orange (similar RAL 2003)



1103440

https://www.phoenixcontact.com/us/products/1103440

### HSC-LR 7U KIT 2003 - Locking

2201795

https://www.phoenixcontact.com/us/products/2201795



DIN rail housing, 7U, Lock and Release system, width: 16.1 mm, height: 89.95 mm, depth: 8.8 mm, color: orange (similar RAL 2003)

#### HSC-LR 5U KIT 2003 - Locking

2201796

https://www.phoenixcontact.com/us/products/2201796



DIN rail housing, 5U, Lock and Release system, width: 16.1 mm, height: 67.95 mm, depth: 8.8 mm, color: orange (similar RAL 2003)



1103440

https://www.phoenixcontact.com/us/products/1103440

### HSC-LR 3U KIT 2003 - Locking

2201797

https://www.phoenixcontact.com/us/products/2201797



DIN rail housing, 3U, Lock and Release system, width: 16.1 mm, height: 45.95 mm, depth: 8.8 mm, color: orange (similar RAL 2003)

#### HSC-LR 7U KIT 5015 - Locking

2203850

https://www.phoenixcontact.com/us/products/2203850



DIN rail housing, 7U, Lock and Release system, width: 16.1 mm, height: 89.95 mm, depth: 8.8 mm, color: blue (similar RAL 5015)



1103440

https://www.phoenixcontact.com/us/products/1103440

#### TBUS8-18,8-PPPPSSSS-7035 - DIN rail bus connectors

1140958

https://www.phoenixcontact.com/us/products/1140958



DIN rail connector, color: light gray, nominal current: 6 A, 4 A (parallel contacts) (Serial contacts), rated voltage (III/2): 32 V, number of positions: 8, product range: TBUS8-18,8.., pitch: 2.54 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 4 parallel contacts/4 serial contacts

#### TBUS8-18,8-PPPPPPPP-7035 - DIN rail bus connectors

2202396

https://www.phoenixcontact.com/us/products/2202396



DIN rail connector, color: light gray, nominal current: 6 A (parallel contacts), rated voltage (III/2): 32 V, number of positions: 8, product range: TBUS8-18,8.., pitch: 2.54 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 8 parallel contacts



1103440

https://www.phoenixcontact.com/us/products/1103440

#### TBUS8-18,8-PPPPPPPS-7035 - DIN rail bus connectors

2202399

https://www.phoenixcontact.com/us/products/2202399



DIN rail connector, color: light gray, nominal current: 6 A, 4 A (parallel contacts) (Serial contacts), rated voltage (III/2): 32 V, number of positions: 8, product range: TBUS8-18,8.., pitch: 2.54 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 7 parallel contacts/1 serial contact

#### TBUS8-18,8-PPPPPPSS-7035 - DIN rail bus connectors

2202403

https://www.phoenixcontact.com/us/products/2202403



DIN rail connector, color: light gray, nominal current: 6 A, 4 A (parallel contacts) (Serial contacts), rated voltage (III/2): 32 V, number of positions: 8, product range: TBUS8-18,8.., pitch: 2.54 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 6 parallel contacts/2 serial contacts



1103440

https://www.phoenixcontact.com/us/products/1103440

#### ME 18,8 TBUS 1,5/5-ST-3,81KMGY - DIN rail bus connectors

2201813

https://www.phoenixcontact.com/us/products/2201813



DIN rail connector, color: light gray, nominal current: 8 A (parallel contacts), rated voltage (III/2): 125 V, number of positions: 5, product range: TBUS5-18,8.., pitch: 3.81 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 5 parallel contacts

#### ME 18,8 TBUS 1,5/5 VPE1 KMGY - DIN rail bus connectors

2202549

https://www.phoenixcontact.com/us/products/2202549



DIN rail connector, color: light gray, nominal current: 8 A (parallel contacts), rated voltage (III/2): 125 V, number of positions: 5, product range: TBUS5-18,8.., pitch: 3.81 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 5 parallel contacts



1103440

https://www.phoenixcontact.com/us/products/1103440

#### TBUS8-18,8-BRIDGE-7035 - DIN rail bus connectors

1387014

https://www.phoenixcontact.com/us/products/1387014

DIN rail bus adapter for ME-IO, overall width: 18.8 mm, 8 parallel positions, color: light grey (similar to RAL 7035)



#### TBUS8-SPL-KIT-7035 - DIN rail bus connectors

1488805

https://www.phoenixcontact.com/us/products/1488805



DIN rail connector, nominal cross section: 0.5 mm², color: light gray, nominal current: 6 A (parallel contacts), rated voltage (III/2): 32 V, contact surface: Au, contact connection type: Socket, number of potentials: 8, number of positions: 8, number of connections: 8, product range: TBUS8..2,54, pitch: 2.54 mm, connection method: Push-in spring connection, mounting: DIN rail mounting, conductor/PCB connection direction: 0°, locking: Snap-in locking, mounting: without, type of packaging: packed in cardboard



1103440

https://www.phoenixcontact.com/us/products/1103440

#### TBUS8-TAP-KIT-7035 - DIN rail bus connectors

1488806

https://www.phoenixcontact.com/us/products/1488806



DIN rail connector, nominal cross section: 0.5 mm², color: light gray, nominal current: 6 A (parallel contacts), rated voltage (III/2): 32 V, contact surface: Au, contact connection type: Socket, number of potentials: 8, number of positions: 8, number of connections: 8, product range: TBUS8..2,54, pitch: 2.54 mm, connection method: Push-in spring connection, mounting: DIN rail mounting, conductor/PCB connection direction: 0 °, locking: Snap-in locking, mounting: without, type of packaging: packed in cardboard

### HS LC-H-D2C/ R2XC1-2,54 - Fiber optic

1036658

https://www.phoenixcontact.com/us/products/1036658



Multiple light guides with glare protection, passive, rigid, Raised head, conical, Emission surface: spherical, Number of displays: 2, (2 rows, 1 column), pitch: 2. 54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HS LC-H-D2C/ R2XC4-2,54 - Fiber optic

1036724

https://www.phoenixcontact.com/us/products/1036724



Multiple light guides with glare protection, passive, rigid, Raised head, conical, Emission surface: spherical, Number of displays: 8, (2 rows, 4 columns), pitch: 2. 54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

#### HS LC-H-D2C/ R4XC4-2,54 - Fiber optic

1036727

https://www.phoenixcontact.com/us/products/1036727



Multiple light guides with glare protection, passive, rigid, Raised head, conical, Emission surface: spherical, Number of displays: 16, (4 rows, 4 columns), pitch: 2.54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HS LC-H-D2C/ R2XC2-2,54 - Fiber optic

1043044

https://www.phoenixcontact.com/us/products/1043044



Multiple light guides with glare protection, passive, rigid, Raised head, conical, Emission surface: spherical, Number of displays: 4, (2 rows, 2 columns), pitch: 2. 54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

#### HS LC-H-D2C/ R4XC2-2,54 - Fiber optic

1071316

https://www.phoenixcontact.com/us/products/1071316



Multiple light guides with glare protection, passive, rigid, Raised head, conical, Emission surface: spherical, Number of displays: 8, (4 rows, 2 columns), pitch: 2. 54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HS LC-H-D2/ R3XC10-2,54 - Fiber optic

1104374

https://www.phoenixcontact.com/us/products/1104374



Multiple light guides with glare protection, passive, rigid, Raised head, Emission surface: spherical, Number of displays: 30, (3 rows, 10 columns), pitch: 2.54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

#### HS LC-H-D3/R1XC1 - Fiber optic

2202313

https://www.phoenixcontact.com/us/products/2202313



Multiple light guides, passive, rigid, Cylinder head, Emission surface: planar, Number of displays: 1, (1 row, 1 column), pitch: 5.08 mm, ESD protection: <10 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HS LC-H-5X2/ R1XC1 - Fiber optic

2202314

https://www.phoenixcontact.com/us/products/2202314



Single light guide, passive, rigid, Rectangular, straight, Emission surface: planar, Number of displays: 1, (1 row, 1 column), ESD protection: <10 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

#### HS LC-H-D3/ R2XC1-5,08 - Fiber optic

2202315

https://www.phoenixcontact.com/us/products/2202315



Multiple light guides, passive, rigid, Cylinder head, Emission surface: planar, Number of displays: 2, (2 rows, 1 column), pitch: 5.08 mm, ESD protection: <5 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)



1103440

https://www.phoenixcontact.com/us/products/1103440

HS LC-H-D2/ R2XC1-2,54 - Fiber optic

2202316

https://www.phoenixcontact.com/us/products/2202316



Multiple light guides with glare protection, passive, rigid, Raised head, Emission surface: spherical, Number of displays: 2, (2 rows, 1 column), pitch: 2.54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

HS LC-H-D2/ R2XC2-2,54 - Fiber optic

2202317

https://www.phoenixcontact.com/us/products/2202317



Multiple light guides with glare protection, passive, rigid, Raised head, Emission surface: spherical, Number of displays: 4, (2 rows, 2 columns), pitch: 2.54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HS LC-H-D2/ R2XC5-2,54 - Fiber optic

2202318

https://www.phoenixcontact.com/us/products/2202318



Multiple light guides with glare protection, passive, rigid, Raised head, Emission surface: spherical, Number of displays: 10, (2 rows, 5 columns), pitch: 2.54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

#### HS LC-H-D2/ R2XC10-2,54 - Fiber optic

2202319

https://www.phoenixcontact.com/us/products/2202319



Multiple light guides with glare protection, passive, rigid, Raised head, Emission surface: spherical, Number of displays: 20, (2 rows, 10 columns), pitch: 2.54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HS LC-H-D2/ R4XC2-2,54 - Fiber optic

2202320

https://www.phoenixcontact.com/us/products/2202320



Multiple light guides with glare protection, passive, rigid, Raised head, Emission surface: spherical, Number of displays: 8, (4 rows, 2 columns), pitch: 2.54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

#### HS LC-H-D2/ R4XC5-2,54 - Fiber optic

2202321

https://www.phoenixcontact.com/us/products/2202321



Multiple light guides with glare protection, passive, rigid, Raised head, Emission surface: spherical, Number of displays: 20, (4 rows, 5 columns), pitch: 2.54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)



1103440

https://www.phoenixcontact.com/us/products/1103440

#### HS LC-H-D2/ R4XC9-2,54 - Fiber optic

2202322

https://www.phoenixcontact.com/us/products/2202322



Multiple light guides with glare protection, passive, rigid, Raised head, Emission surface: spherical, Number of displays: 36, (4 rows, 9 columns), pitch: 2.54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

#### HS LC-H-D2/ R2XC4-2,54 - Fiber optic

2202531

https://www.phoenixcontact.com/us/products/2202531



Multiple light guides with glare protection, passive, rigid, Raised head, Emission surface: spherical, Number of displays: 8, (2 rows, 4 columns), pitch: 2.54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)



1103440

https://www.phoenixcontact.com/us/products/1103440

HS LC-H-D2/ R4XC4-2,54 - Fiber optic

2202532

https://www.phoenixcontact.com/us/products/2202532



Multiple light guides with glare protection, passive, rigid, Raised head, Emission surface: spherical, Number of displays: 16, (4 rows, 4 columns), pitch: 2.54 mm, ESD protection: <8 kV, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com