

1106958

https://www.phoenixcontact.com/us/products/1106958

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



CHARX connect standard, DC charging cable, with vehicle charging connector and open cable end, for charging electric vehicles (EV) with direct current (DC), with connected PP contact, with replaceable mating face frame, with analog temperature sensors, CCS type 2, IEC 62196-3, 200 A / 1000 V (DC), PHOENIX CONTACT logo, cable: 7.5 m, black, straight, NOTE: Cable management may be required.

Product description

DC charging cable with vehicle charging connector and free cable end for fast charging of electric vehicles (EV) with direct current (DC) via CCS type 2 vehicle charging inlets, for installation at charging stations for e-mobility (EVSE)

Your advantages

- · Complete product range
- · The right charging cable for every application, from the carport to the charging park
- · Convenient handling due to the ergonomic design
- · Available with your logo on request for consistent branding of your charging station
- · Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001

Commercial data

Item number	1106958
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	EM01
Product key	XWBAAD
GTIN	4063151000547
Weight per piece (including packing)	13,146 g
Weight per piece (excluding packing)	13,146 g
Customs tariff number	85444290
Country of origin	PL



1106958

https://www.phoenixcontact.com/us/products/1106958

Technical data

Product properties

Product type	DC charging cable
Product family	CHARX connect standard
Application	for charging electric vehicles (EV) with direct current (DC)
	for installation at charging stations for electromobility (EVSE)
Туре	DC charging cable
	with vehicle charging connector and open cable end
Design	with connected PP contact
	with replaceable mating face frame
	with analog temperature sensors
Technology	Combined Charging System
Affixed logo	PHOENIX CONTACT logo
Label	14.1 mm x 44.8 mm (customer logo on request)
Charging standard	CCS type 2
Charging mode	Mode 4
Data management status	
Article revision	04

Electrical properties

Type of signal transmission	Pulse width modulation with modulated Powerline communication in accordance with ISO/IEC 15118 / DIN SPEC 70121
Note on the connection method	Crimp connection, cannot be disconnected
Coding	1500 Ω (between PE and PP)
	PP signal contact connected to cable
Temperature monitoring	2x Pt 1000
Type of charging current	DC
Charging power	200 kW
Charging current	200 A
Type of charging current	DC Boost Mode
Charging power	up to 500 kW (Boost Mode, depending on the ambient conditions. For detailed information, see the packing slip in the download area for this item.)
Charging current	up to 500 A (Boost Mode, depending on the ambient conditions For detailed information, see the packing slip in the download area for this item.)

Power contact

Number	3 (PE, DC+, DC-)
Rated voltage	1000 V DC
Rated current	200 A (up to 40 °C)

Signal contact



1106958

https://www.phoenixcontact.com/us/products/1106958

Number	2 (CP, PP)
Rated voltage	30 V AC
Rated current	2 A
emperature sensors (Pt 1000)	
Sensor type	Pt 1000
Standards/regulations	DIN EN 60751
Attachment point	Sensor for the DC contacts
Switch-off temperature	90 °C ±1 K (equivalent to a Pt 1000 value of 1346.5 Ω)
Long-term stability	0.06 % (after 1000 hours at 130 °C)
Recommended measured current	1 mA (1 V at 0°C)
Coefficient	3850 ppm/K
Ambient temperature	-50 °C 130 °C (Operation)

Dimensions

Vehicle charging connector

Width	75 mm
Height	139 mm
Depth	267 mm

Material specifications

Color (Housing)	black (9005)
Color (Handle area)	gray (7042)
Color (Mating face)	black (9005)
Color (Protective cap)	black (9005)
Color (Cable)	black (9005)
Material (Vehicle charging connector)	Plastic
Material (Cable outer sheath)	TPE-U
Material (Contact surface)	Silver

Cable/line

Cable length	7.5 m ±45 mm
Wiring standards/regulations	prEN 50620/DIN EN 50620
Wiring certifications	VDE-Reg.
Cable weight	max. 1620.00 kg/km
Cable type	Class 6
Cable type	straight
Cable structure	2 x 50 mm ² + 1 x 25 mm ² + 3 x 2 x 0.75 mm ²
External cable diameter	28.10 mm ±0.5 mm
Outer sheath, material	TPE-U
Stripping length of the sheath	140 mm ±10 mm
Stripping length	140 mm ±10 mm
Cable resistance	\leq 0.00039 Ω /m (based on a power core, at an ambient temperature of 20°C)



1106958

https://www.phoenixcontact.com/us/products/1106958

Standards/regulations

Bending radius	min. 281 mm (10x Ø)
chanical properties	
lechanical data	
Insertion/withdrawal cycles	> 10000
Insertion force	< 100 N
Withdrawal force	< 100 N
rironmental and real-life conditions	
mbient conditions	
Degree of protection (Vehicle charging connector)	IP44 (plugged in; when plugged in and ready to operate, the degree of protection is only ensued if both plug-in components
	are original products from Phoenix Contact or suitable standard compliant products)
Ambient temperature (operation)	-30 °C 40 °C
	max. 55 °C (Current reduction required, observe the DC contact temperature limit value of 90°C)
Ambient temperature (storage/transport)	-40 °C 80 °C
Altitude	5000 m (above sea level)
ndards and regulations	
onnection in accordance with standard	
Normative cable length restrictions	NOTE: Cable management may be required.
	Cable management is required in the US if the cable length exceeds 7.5 m (IEC 61851-1).

IEC 62196-3




1106958

https://www.phoenixcontact.com/us/products/1106958

Drawings

Dimensional drawing

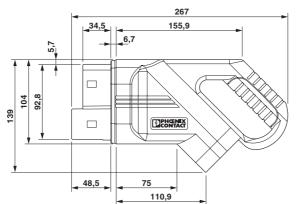





Make sure that the vehicle charging connector is placed in an appropriate charging connector holder, which ensures a minimum protection rating of IP24 in accordance with IEC 61851-1, for the entire time between charging. To create this charging connector holder, use the dimensions of the vehicle charging connector. Detailed dimensions can also be found in the Download area.



1106958

https://www.phoenixcontact.com/us/products/1106958



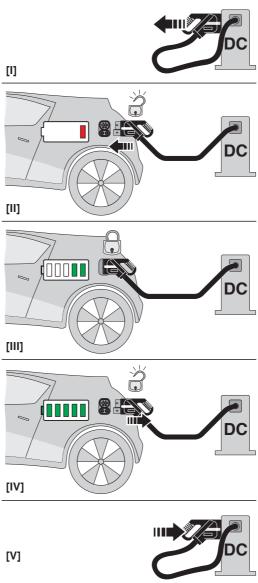


Operating instructions



1106958


https://www.phoenixcontact.com/us/products/1106958



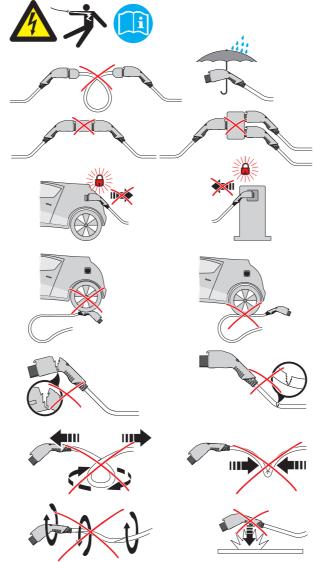

Warnings regarding use



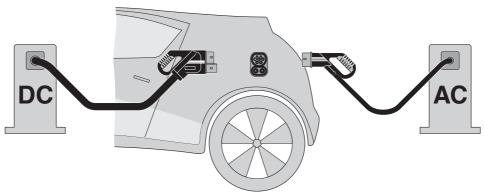


The Combined Charging System (CCS) principle - standard-compliant charging system for electric vehicles, which supports both conventional AC charging and fast DC charging. Both Vehicle Connectors fit into the CCS Vehicle Inlet.



1106958

https://www.phoenixcontact.com/us/products/1106958

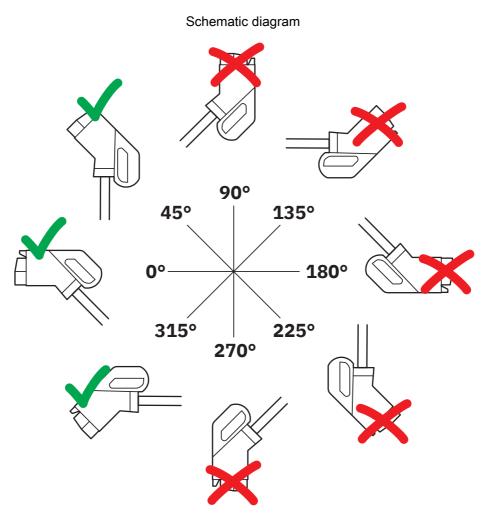


The resting position must be installed in the charging station such that the user cannot hang up the vehicle connector upside down (90° to 270°). However, positions rotated upward (45°) or downward (315°) are options for a resting position.



1106958

https://www.phoenixcontact.com/us/products/1106958



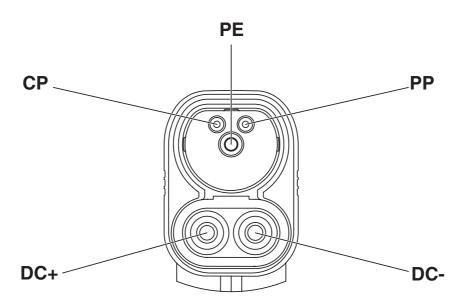

Pin assignment of the Vehicle Connector



1106958

https://www.phoenixcontact.com/us/products/1106958

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1106958

CB scheme	IECEE CB Scheme Approval ID: DE1-65588/M1				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		1000 V	200 A	-	-



1106958

https://www.phoenixcontact.com/us/products/1106958

Classifications

ECLASS

	ECLASS-11.0	27144705	
	ECLASS-12.0	27144705	
	ECLASS-13.0	27144705	
ETIM			
	ETIM 9.0	EC002897	
UNSPSC			
	UNSPSC 21.0	39121500	



1106958

https://www.phoenixcontact.com/us/products/1106958

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-10
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	835fa41a-b84d-4b0d-9743-703f6d436d4f



1106958

https://www.phoenixcontact.com/us/products/1106958

Accessories

EV-T2CCS-PARK - Charging connector holder

1624153

https://www.phoenixcontact.com/us/products/1624153



CHARX connect standard, Charging connector holder, Accessories, for vehicle charging connectors on charging stations (EVSE), CCS type 2, IEC 62196-3, Front mounting, housing: black, Item is not compatible with the HPC CCS type 2 charging cable from Phoenix Contact.

EV-PLCC-AC1-DC1 - DC charging controller

1624130

https://www.phoenixcontact.com/us/products/1624130



Programmable charging controller for DC and AC charging of electric vehicles in accordance with IEC 61851-1,-23, DIN SPEC 70121, and CHAdeMO, with integrated cellular modem



1106958

https://www.phoenixcontact.com/us/products/1106958

EV-T2CCS-MF-M4X45-BIT - Repair kit

1085796

https://www.phoenixcontact.com/us/products/1085796



CHARX connect standard, Repair kit, Accessories, with replaceable mating face frame, with 5x M4X45 rounded head screws with Torx security drive, with special bit (867/4 IPR TORX PLUS® bit, 20 IPR x 89 mm) for insulated screwdriver, for replacement of the mating face frame of vehicle charging connectors, CCS type 2, IEC 62196-3, housing: black, The vehicle connector housing does not have to be opened in order to replace the mating face frame.

EV-T2CCS-MF-M4X45 - Repair kit

1081734

https://www.phoenixcontact.com/us/products/1081734



CHARX connect standard, Repair kit, Accessories, with replaceable mating face frame, with 5x M4X45 rounded head screws with Torx security drive, for replacement of the mating face frame of vehicle charging connectors, CCS type 2, IEC 62196-3, housing: black, The vehicle connector housing does not have to be opened in order to replace the mating face frame.



1106958

https://www.phoenixcontact.com/us/products/1106958

EV-LABEL-K - Label

1309761

https://www.phoenixcontact.com/us/products/1309761

CHARX connect, Label, Accessories, for CCS type 2 vehicle charging connector, DIN EN 17186, adhesive



EV-LABEL-L - Label

1309765

https://www.phoenixcontact.com/us/products/1309765

CHARX connect, Label, Accessories, for CCS type 2 vehicle charging connector, DIN EN 17186, adhesive





1106958

https://www.phoenixcontact.com/us/products/1106958

G-INS-M40-L68N-PNES-BK - Cable gland

1424484

https://www.phoenixcontact.com/us/products/1424484



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 22 mm \dots 32 mm, shielding: no, connecting thread: M40 x 1.5, color: jet black RAL 9005

CHARX PS-M2/3AC/1000DC/30KW - DC power module

1232243

https://www.phoenixcontact.com/us/products/1232243

CHARX power basic, Fast charging module for setting up DC charging stations, 19" rack mounting, input: 3-phase, output: 30 V DC...1000 V DC / 0 A...100 A





1106958

https://www.phoenixcontact.com/us/products/1106958

CHARX PS-M2/825DC/1000DC/30KW - DC power module

1296467

https://www.phoenixcontact.com/us/products/1296467

CHARX power basic, Fast charging module for setting up DC charging stations, 19" rack mounting, output: 30 V DC...1000 V DC / 0 A...100 A



Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com