

https://www.phoenixcontact.com/us/products/1118305



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Heatsink for housing series: ICS, material: Aluminum, anodized, product range: ICS50-..122X.., width: 67.4 mm, height: 50.1 mm, Individual milling possible.

Your advantages

- · Heatsinks enable the finished devices to be used in thermally demanding applications
- · Extensive thermal simulations help achieve the optimum arrangement of components on the printed circuit board
- · Customized heatsinks for reliable heat dissipation
- Simplified engineering process: all the services needed for your specific device design
- · Tailored system solution comprised of a housing, connection technology, heatsink, and additional accessories

Commercial data

Item number	1118305
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	AC09
Product key	ACHAEF
GTIN	4063151044985
Weight per piece (including packing)	372.6 g
Weight per piece (excluding packing)	372.6 g
Customs tariff number	76169990
Country of origin	CN



https://www.phoenixcontact.com/us/products/1118305



Technical data

Notes

General	Individual milling possible.
General	Refer to the data sheet for the range in the download area.
General	The R_{th} diagram shows the application, free-hanging (vertical) in the direction of flow.


Product properties

Product type	Heatsink
Housing type	Heatsink
Housing series	ICS
Product family	ICS50122X

Data management status

Article revision	02
Article revision	02

Dimensions

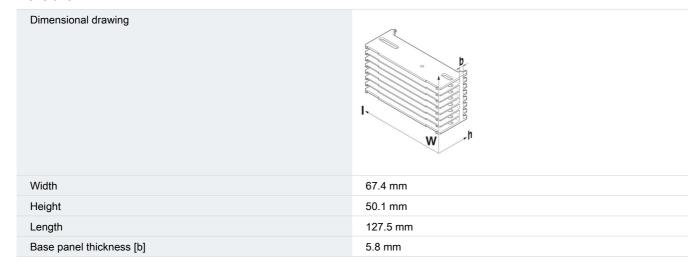

Material specifications

Color	aluminum color
Color (Housing)	Aluminum color
Material	Aluminum
Surface characteristics	anodized
Thermal resistance R _{th}	1.39 K/W (At ΔT 65 K for ambient temperature)
	2.57 K/W (At ΔT 5 K for ambient temperature)

Environmental and real-life conditions

Vibration test

Specification	IEC 60068-2-6:2007-12
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min



1118305

https://www.phoenixcontact.com/us/products/1118305

Mounting type

Amplitude	0.15 mm (10 Hz 58.1 Hz)
Acceleration	2g (58.1 Hz 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
hocks	
Specification	IEC 60068-2-27:2008-02
Pulse shape	Semi-sinusoidal
Acceleration	15g
Shock duration	11 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
est for substances that would hinder coating with paint	or varnish
est for substances that would hinder coating with paint of Specification Result	or varnish VDMA 24364:2018-05
est for substances that would hinder coating with paint a	or varnish VDMA 24364:2018-05


Slot

1118305

https://www.phoenixcontact.com/us/products/1118305



Drawings

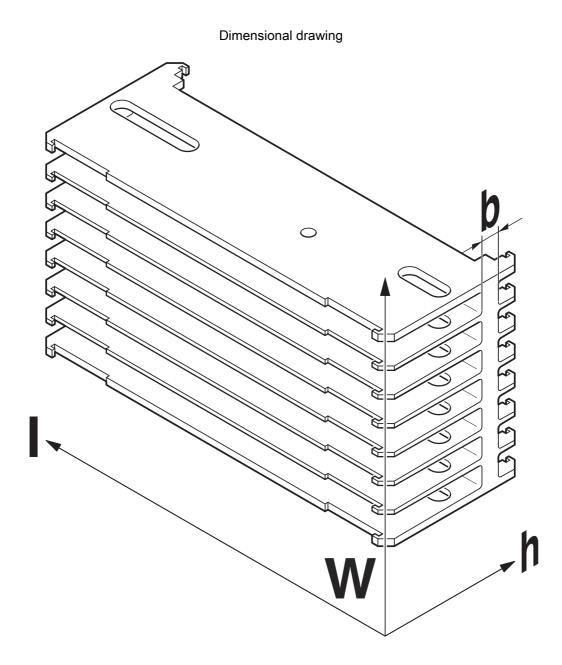


Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.



1118305

https://www.phoenixcontact.com/us/products/1118305

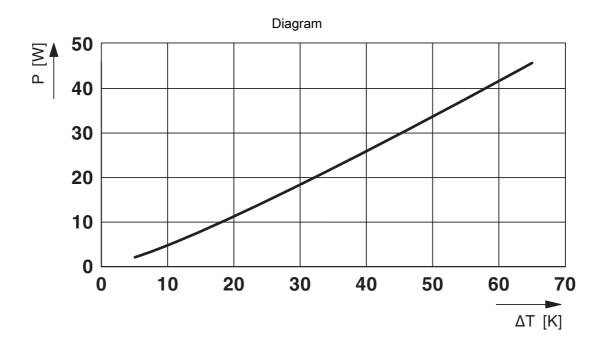



1118305

https://www.phoenixcontact.com/us/products/1118305

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27260501
ECLASS-12.0	27260501
ECLASS-13.0	27260501
ETIM	
ETIM 9.0	EC001143
UNSPSC	

32131000



https://www.phoenixcontact.com/us/products/1118305



Environmental product compliance

EU RoHS

20 1.01.0	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com