

# ECS-P-122X169-S-UV1-VC3AML4/8 - Front plate



1143773

<https://www.phoenixcontact.com/us/products/1143773>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

ECS family faceplate, ready for integration of one modular rectangular connector Variocon VC3, screw locking, rated IP66/67/69 when combined with ECS housing, Color: Black (9005), Width: 163 mm, Height: 30 mm, Depth: 62 mm



## Your advantages

- Housing design supports the installation of a range of PCB thicknesses for high application diversity
- Optional accessories for wall and mast mounting
- Proven PCB connection technology
- Integrated tamper protection
- Effective protection of electronics against thermal and mechanical influences

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1143773       |
| Packing unit                         | 5 pc          |
| Minimum order quantity               | 5 pc          |
| Sales key                            | AC04          |
| Product key                          | ACFDAB        |
| GTIN                                 | 4063151130374 |
| Weight per piece (including packing) | 56 g          |
| Weight per piece (excluding packing) | 56 g          |
| Customs tariff number                | 84879090      |
| Country of origin                    | US            |

## Technical data


### Notes

|               |                                                             |
|---------------|-------------------------------------------------------------|
| Assembly note | Refer to the data sheet for the range in the download area. |
|---------------|-------------------------------------------------------------|

### Product properties

|                |                 |
|----------------|-----------------|
| Product type   | Front plate     |
| Housing type   | Outdoor housing |
| Housing series | ECS             |
| Product family | ECS..122X..S..  |

### Dimensions

|                     |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 163 mm                                                                              |
| Height              | 30 mm                                                                               |
| Depth               | 62 mm                                                                               |

### PCB design

|               |                     |
|---------------|---------------------|
| PCB thickness | 1.57 mm ... 2.36 mm |
|---------------|---------------------|

### Material specifications

|                                        |                    |
|----------------------------------------|--------------------|
| Color (Housing)                        | black (RAL 9005)   |
| Flammability rating according to UL 94 | V0                 |
| Housing material                       | PC (polycarbonate) |
| Surface characteristics                | untreated          |

### Environmental and real-life conditions

#### Vibration test

|                        |                           |
|------------------------|---------------------------|
| Specification          | IEC 60068-2-6:2007-12     |
| Frequency              | 10 - 2000 - 10 Hz         |
| Sweep speed            | 1 octave/min              |
| Acceleration           | 15g (61.6 Hz ... 2000 Hz) |
| Test duration per axis | 2.5 h                     |
| Test directions        | X-, Y- and Z-axis         |

#### Glow-wire test

|               |                        |
|---------------|------------------------|
| Specification | IEC 60695-2-11:2014-02 |
|---------------|------------------------|

# ECS-P-122X169-S-UV1-VC3AML4/8 - Front plate



1143773

<https://www.phoenixcontact.com/us/products/1143773>

|                  |        |
|------------------|--------|
| Temperature      | 850 °C |
| Time of exposure | 30 s   |

## Mechanical strength / tumbling barrel

|                |                        |
|----------------|------------------------|
| Specification  | IEC 60068-2-31:2008-05 |
| Height of fall | 50 cm                  |
| Frequency      | 50                     |

## Shocks

|                                |                                   |
|--------------------------------|-----------------------------------|
| Specification                  | IEC 60068-2-27:2008-02            |
| Pulse shape                    | Semi-sinusoidal                   |
| Acceleration                   | 50g                               |
| Shock duration                 | 11 ms                             |
| Number of shocks per direction | 3                                 |
| Test directions                | X-, Y- and Z-axis (pos. and neg.) |

## Salt spray test

|               |                           |
|---------------|---------------------------|
| Specification | DIN EN 60068-2-11:2000-02 |
| Test duration | 96 h                      |

## Test for substances that would hinder coating with paint or varnish

|               |                    |
|---------------|--------------------|
| Specification | VDMA 24364:2018-05 |
| Result        | Test passed        |

## Degree of protection (IP code)

|                                       |                                                   |
|---------------------------------------|---------------------------------------------------|
| Specification                         | IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08 |
| Result, degree of protection, IP code | IP66/IP68 (2 m/24 h)                              |

## Ambient conditions


|                                         |                   |
|-----------------------------------------|-------------------|
| Degree of protection                    | IP66/IP67         |
| Max. NEMA code to attain                | 6                 |
| Impact strength                         | IK08              |
| Ambient temperature (operation)         | -40 °C ... 100 °C |
| Ambient temperature (storage/transport) | -40 °C ... 100 °C |

## PCB data

|                      |                     |
|----------------------|---------------------|
| Thickness of the PCB | 1.57 mm ... 2.36 mm |
|----------------------|---------------------|

## Drawings

Dimensional drawing

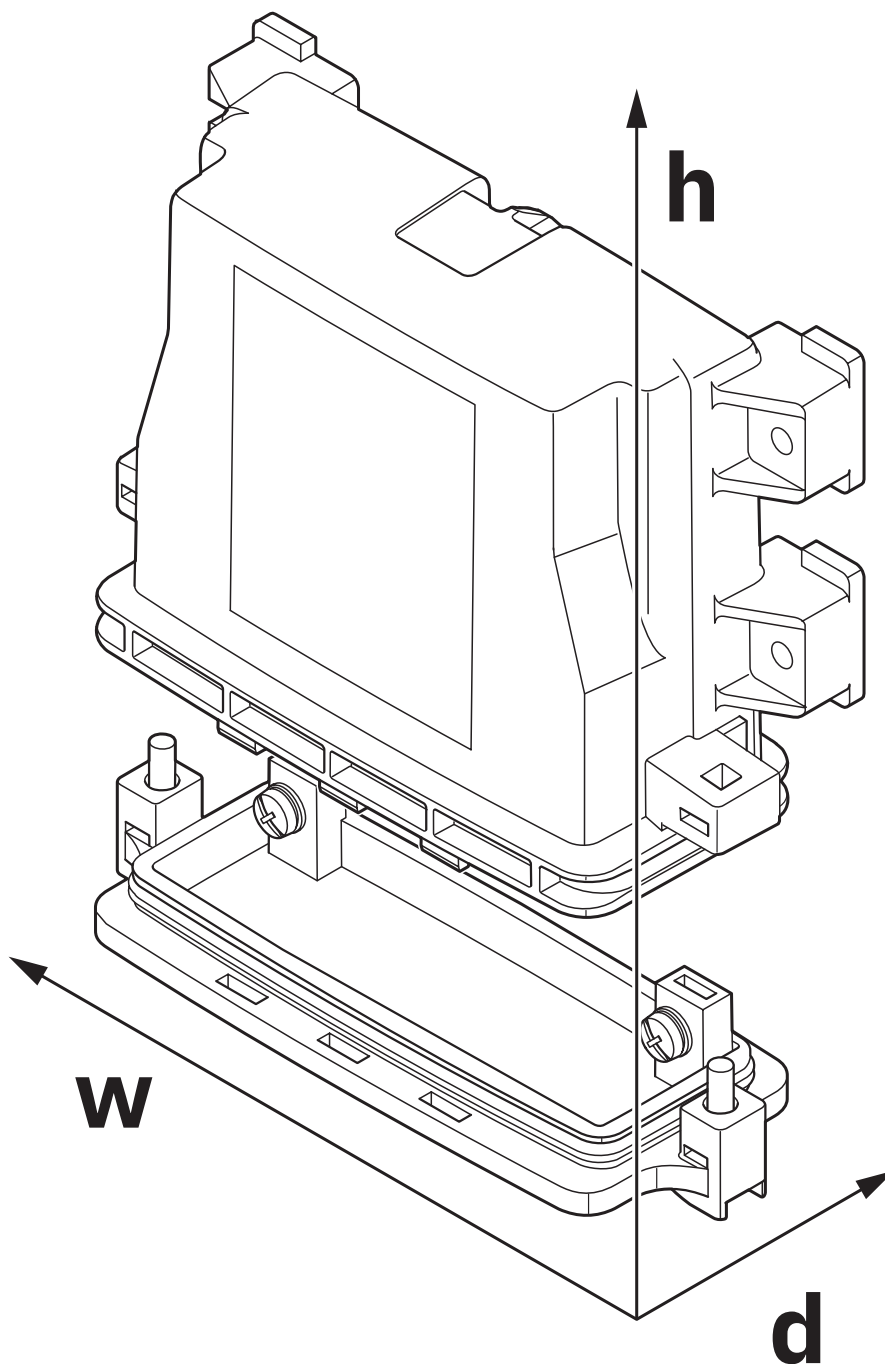

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.

# ECS-P-122X169-S-UV1-VC3AML4/8 - Front plate



1143773

<https://www.phoenixcontact.com/us/products/1143773>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27182702 |
| ECLASS-13.0 | 27190603 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001031 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

# ECS-P-122X169-S-UV1-VC3AML4/8 - Front plate



1143773

<https://www.phoenixcontact.com/us/products/1143773>

## Mandatory accessories

### ECS-B-122X169-S-UV1-V - Electronics housing

2230002

<https://www.phoenixcontact.com/us/products/2230002>



Screw locking vented enclosure of the ECS Family. IP66/67/69 rated when mated with associated faceplate. Color: Black (9005), Width: 164 mm, Height: 176 mm, Depth: 64 mm

---

### ECS-B-122X169-S-UV1-NV - Electronics housing

2230003

<https://www.phoenixcontact.com/us/products/2230003>



Screw locking non-vented enclosure of the ECS family. IP66/67/69 rated when mated with associated faceplate. Color: Black (9005), Width: 164 mm, Height: 176 mm, Depth: 64 mm

# ECS-P-122X169-S-UV1-VC3AML4/8 - Front plate



1143773

<https://www.phoenixcontact.com/us/products/1143773>

## ECS-B-122X109-S-UV1-V - Electronics housing

1054710

<https://www.phoenixcontact.com/us/products/1054710>



Screw locking vented enclosure of the ECS Family. IP66/67/69 rated when mated with associated faceplate. Color: Black (9005), Width: 164 mm, Height: 116 mm, Depth: 64 mm

---

## ECS-B-122X109-S-UV1-NV - Electronics housing

1054711

<https://www.phoenixcontact.com/us/products/1054711>



Screw locking non-vented enclosure of the ECS family. IP66/67/69 rated when mated with associated faceplate. Color: Black (9005), Width: 164 mm, Height: 116 mm, Depth: 64 mm

---

## Accessories

# ECS-P-122X169-S-UV1-VC3AML4/8 - Front plate



1143773

<https://www.phoenixcontact.com/us/products/1143773>

## SF-TXH 20X100 - Screwdriver

1200151

<https://www.phoenixcontact.com/us/products/1200151>

Screwdriver, Torx® with bore hole, TX 20 x 100, two-component handle



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)