

IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Inline, Temperature measurement terminal, Analog RTD inputs: 4 (NTC, linear resistors), connection technology: 2-conductor, transmission speed in the local bus: 500 kbps, degree of protection: IP20, including Inline connector

Product description

The terminal is designed for use within an Inline station. It is used to acquire signals from resistive temperature sensors. The measured values are depicted in standardized representation format. Inline ECO terminals are approved for the temperature range from 0°C to +55°C. The electronics base and Inline connector are supplied as standard.

Your advantages

- 4 analog inputs
- Connection of sensors in 2-conductor technology
- Sensors supported: NTC, linear resistors
- Data format: standardized representation
- Diagnostic information in the process data word
- Linear input range from 0 kΩ to 100 kΩ

Commercial data

Item number	1185434
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DR01
Product key	DRI143
GTIN	4063151225704
Weight per piece (including packing)	83.76 g
Weight per piece (excluding packing)	69 g
Customs tariff number	85389099
Country of origin	DE

IB IL RTD 4/NTC-ECO - Temperature module




1185434

<https://www.phoenixcontact.com/us/products/1185434>

Technical data

Dimensions

Dimensional drawing	
Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Interfaces

Inline local bus

Number of interfaces	2
Connection method	Inline data jumper
Transmission speed	500 kbps

System properties

Module

ID code (dec.)	126
ID code (hex)	7E
Length code (hex)	04
Length code (dec)	04
Process data channel	64 bit
Input address area	8 Byte
Output address area	0 Byte
Register length	64 bit
Required parameter data	1 Byte
Required configuration data	4 Byte

Input data

Analog

Input name	Analog RTD inputs
Description of the input	Inputs for resistive temperature sensors
Number of inputs	4 (NTC, linear resistors)

IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

Connection method	Inline connector
Connection technology	2-conductor
Note regarding the connection technology	shielded
A/D conversion time	typ. 120 ms
A/D converter resolution	24 bit
Data formats	Standardized representation
Input filter	Digital filter
Input filter time	120 ms (per channel)
Nominal value of the current sources	10 μ A (pulsed current, the data is valid during the sampling phase)
Linear resistance measuring range	0 Ω ... 100 k Ω
Process data update	< 10 ms
Protective circuit	Overload protection; max. $\pm$ 40 V DC, 1 min. Transient protection; Suppressor diode

Product properties

Product type	I/O component
Product family	Inline
Type	modular
Scope of delivery	including Inline connector
Diagnostics messages	Failure of the internal I/O supply I/O error message sent to the bus coupler Checksum error I/O error message sent to the bus coupler

Data management status

Article revision	00
------------------	----

Electrical properties

Potentials

Power consumption	typ. 0.67 W (entire device) max. 0.97 W (entire device)
-------------------	--

Potentials: Communications power (U_L)

Supply voltage	7.5 V DC (via voltage jumper)
Current draw	max. 85 mA typ. 56 mA

Potentials: Supply of analog modules (U_{ANA})

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 14 mA typ. 7.3 mA

Electrical isolation/isolation of the voltage ranges

Test voltage: Bus logic (local bus, communications power)	500 V AC, 50 Hz, 1 min.
Test voltage: Analog I/O	500 V AC, 50 Hz, 1 min.

IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

Test voltage: Functional ground

500 V AC, 50 Hz, 1 min.

Connection data

Connection technology

Connection name

Inline connector

Conductor connection

Connection method

Spring-cage connection

Conductor cross section rigid

0.08 mm² ... 1.5 mm²

Conductor cross section flexible

0.08 mm² ... 1.5 mm²

Conductor cross section AWG

28 ... 16

Stripping length

8 mm

Inline connector

Connection method

Spring-cage connection

Conductor cross section, rigid

0.08 mm² ... 1.5 mm²

Conductor cross section, flexible

0.08 mm² ... 1.5 mm²

Conductor cross section AWG

28 ... 16

Stripping length

8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)

0 °C ... 55 °C

Degree of protection

IP20

Air pressure (operation)

70 kPa ... 106 kPa (up to 3000 m above sea level)

Air pressure (storage/transport)

70 kPa ... 106 kPa (up to 3000 m above sea level)

Ambient temperature (storage/transport)

-25 °C ... 85 °C

Permissible humidity (operation)

10 % ... 95 % (non-condensing)

Permissible humidity (storage/transport)

10 % ... 95 % (non-condensing)

Standards and regulations

Protection class

III (IEC 61140, EN 61140, VDE 0140-1)

Mounting

Mounting type

DIN rail mounting

IB IL RTD 4/NTC-ECO - Temperature module




1185434

<https://www.phoenixcontact.com/us/products/1185434>


Drawings

Connection diagram

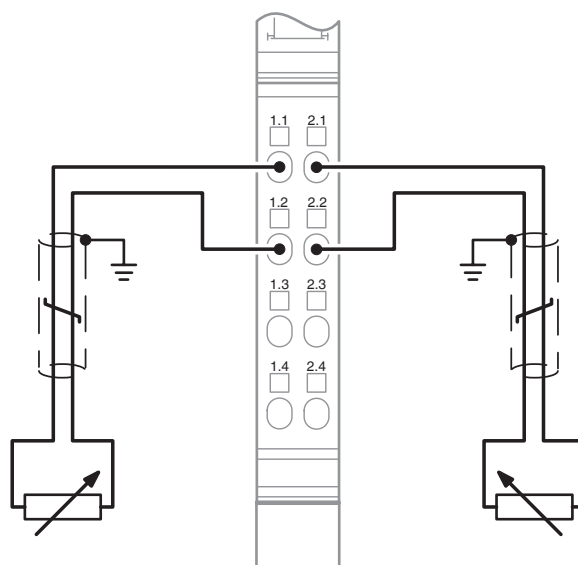

Connecting the sensors

Dimensional drawing

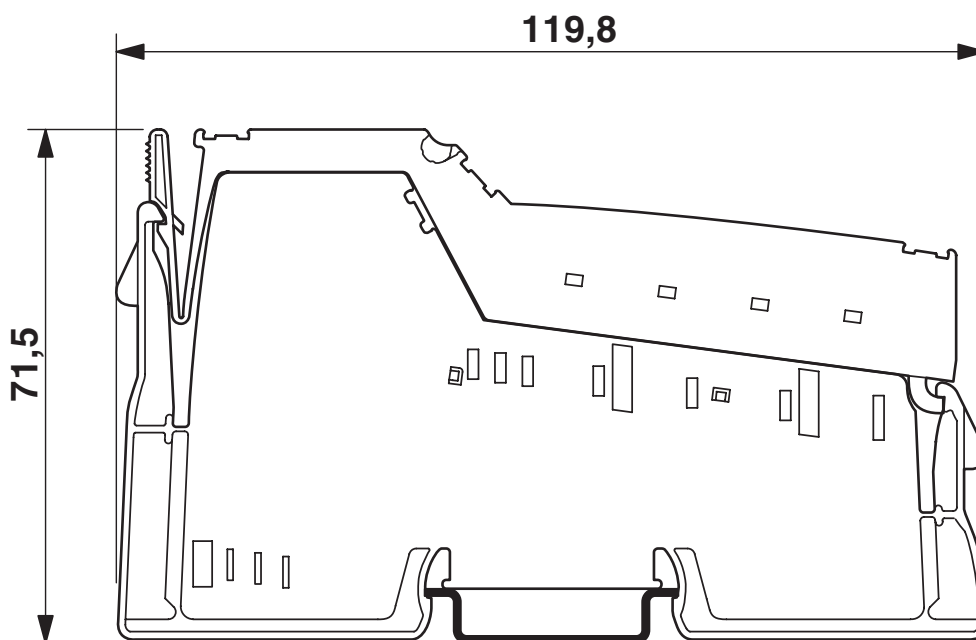

IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1185434>



UL Listed

Approval ID: E238705



cUL Listed

Approval ID: E238705

UAE-RoHS

Approval ID: 22-04-13090

cULus Listed

IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

Classifications

ECLASS

ECLASS-11.0	27242601
ECLASS-12.0	27242601
ECLASS-13.0	27242601

ETIM

ETIM 9.0	EC001596
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I, 7(c)-II
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	b28b05a2-cc96-4e10-ab43-dc958ead9af0

IB IL RTD 4/NTC-ECO - Temperature module

1185434

<https://www.phoenixcontact.com/us/products/1185434>



Accessories

IB IL SCN-8 - Inline connector

2726337

<https://www.phoenixcontact.com/us/products/2726337>

Connector, for digital 1, 2 or 8-channel Inline terminals



IB IL FIELD 2 - Marking field

2727501

<https://www.phoenixcontact.com/us/products/2727501>

Marking field, width: 12.2 mm



IB IL RTD 4/NTC-ECO - Temperature module

1185434

<https://www.phoenixcontact.com/us/products/1185434>



ESL 62X10 - Insert strip

0809492

<https://www.phoenixcontact.com/us/products/0809492>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, CMS-P1-PLOTTER, mounting type: insert, lettering field size: 62 x 10 mm, Number of individual labels: 72



SK 8 - Shield connection clamp

3025163

<https://www.phoenixcontact.com/us/products/3025163>

Shield connection clamp, for shield on busbars, contact resistance < 1 mΩ



IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

SK 14 - Shield connection clamp

3025176

<https://www.phoenixcontact.com/us/products/3025176>



Shield connection clamp, for shield on busbars, contact resistance $< 1 \text{ m}\Omega$

SK 20 - Shield connection clamp

3025189

<https://www.phoenixcontact.com/us/products/3025189>



Shield connection clamp, for shield on busbars, contact resistance $< 1 \text{ m}\Omega$

IB IL RTD 4/NTC-ECO - Temperature module

1185434

<https://www.phoenixcontact.com/us/products/1185434>



SK 35 - Shield connection clamp

3026463

<https://www.phoenixcontact.com/us/products/3026463>

Shield connection clamp, for shield on busbars, contact resistance $< 1 \text{ m}\Omega$



AB-SK - Support bracket

3025341

<https://www.phoenixcontact.com/us/products/3025341>

Support bracket for busbars



IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

AB-SK 65 - Support bracket

3026489

<https://www.phoenixcontact.com/us/products/3026489>

Support bracket, Bracket for busbars, set every 20 cm, width: 6.2 mm, height: 95.5 mm, number of positions: 1, color: gray, mounting type: DIN rail mounting



AB-SK/E - Support bracket

3026476

<https://www.phoenixcontact.com/us/products/3026476>

Support bracket, Bracket for busbars, set every 20 cm, depth: 20 mm, width: 56 mm, height: 10 mm, diameter: 4.5 mm, number of positions: 2, color: silver, mounting type: Direct mounting



IB IL RTD 4/NTC-ECO - Temperature module

1185434

<https://www.phoenixcontact.com/us/products/1185434>



NLS-CU 3/10 SN 1000MM - Neutral busbar

0402174

<https://www.phoenixcontact.com/us/products/0402174>



Neutral busbar, DIN VDE 0611-4: 1991-02, color: silver

AK 4 - Connection terminal block

0404017

<https://www.phoenixcontact.com/us/products/0404017>



Connection terminal block, connection method: Screw connection, Rated cross section: 4 mm², cross section: 0.5 mm² - 6 mm², mounting: Neutral busbar, color: silver

IB IL RTD 4/NTC-ECO - Temperature module

1185434

<https://www.phoenixcontact.com/us/products/1185434>



AKG 4 GNYE - Connection terminal block

0421029

<https://www.phoenixcontact.com/us/products/0421029>



Connection terminal block, nom. voltage: 300 V, nominal current: 41 A, connection method: Screw connection, Rated cross section: 4 mm², cross section: 0.5 mm² - 6 mm², mounting: Neutral busbar, color: green-yellow

AKG 4 BK - Connection terminal block

0421032

<https://www.phoenixcontact.com/us/products/0421032>



Connection terminal block, nom. voltage: 300 V, nominal current: 41 A, connection method: Screw connection, Rated cross section: 4 mm², cross section: 0.5 mm² - 6 mm², mounting: Neutral busbar, color: black

IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

SKS 8 - Shield connection clamp

3240210

<https://www.phoenixcontact.com/us/products/3240210>



Shield connection terminal block, for applying the shield to busbars

SKS 14 - Shield connection clamp

3240211

<https://www.phoenixcontact.com/us/products/3240211>



Shield connection terminal block, for applying the shield to busbars

IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

SKS 20 - Shield connection clamp

3240212

<https://www.phoenixcontact.com/us/products/3240212>



Shield connection terminal block, for applying the shield to busbars

SKS 8-D - Shield connection clamp

3240213

<https://www.phoenixcontact.com/us/products/3240213>



Shield connection terminal block, for direct shield on conductive mounting panels

IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

SKS 14-D - Shield connection clamp

3240214

<https://www.phoenixcontact.com/us/products/3240214>



Shield connection terminal block, for direct shield on conductive mounting panels

SKS 20-D - Shield connection clamp

3240215

<https://www.phoenixcontact.com/us/products/3240215>



Shield connection terminal block, for direct shield on conductive mounting panels

IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

SKS 8-NS35 - Shield connection clamp

3240216

<https://www.phoenixcontact.com/us/products/3240216>



Shield connection terminal block, for applying the shield to busbars

SKS 14-NS35 - Shield connection clamp

3240217

<https://www.phoenixcontact.com/us/products/3240217>



Shield connection terminal block, for applying the shield to busbars

IB IL RTD 4/NTC-ECO - Temperature module



1185434

<https://www.phoenixcontact.com/us/products/1185434>

SKS 20-NS35 - Shield connection clamp

3240218

<https://www.phoenixcontact.com/us/products/3240218>



Shield connection terminal block, for applying the shield to busbars

SKS 8-SNS35 - Shield connection clamp

3062786

<https://www.phoenixcontact.com/us/products/3062786>



Shield connection terminal block, for applying the shield to busbars

IB IL RTD 4/NTC-ECO - Temperature module

1185434

<https://www.phoenixcontact.com/us/products/1185434>



SKS 14-SNS35 - Shield connection clamp

3062799

<https://www.phoenixcontact.com/us/products/3062799>



Shield connection terminal block, for applying the shield to busbars

SKS 20-SNS35 - Shield connection clamp

3062809

<https://www.phoenixcontact.com/us/products/3062809>



Shield connection terminal block, for applying the shield to busbars

IB IL RTD 4/NTC-ECO - Temperature module

1185434

<https://www.phoenixcontact.com/us/products/1185434>



ST-BE-LA230 - Component connector

2802387

<https://www.phoenixcontact.com/us/products/2802387>



Component plug, with light indicator, to connect 2-pos. components into the basic terminal block, height: 19 mm, color: gray, voltage light indicator: 230 V AC/DC

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com