

BXT-4XS-SEC-T3-60-FM - Surge protection device



1191882

<https://www.phoenixcontact.com/us/products/1191882>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Wall-mounted NEMA 4/4X (IP66) 316L stainless steel enclosure with surge protection for 60 V AC/DC power and a divided compartment ready for additional Isolated Loop Protection.

Your advantages

- Eligible for limited lifetime warranty (in some U.S. markets)
- Customizable: expand base unit with SPDs to suit your application
- Polycarbonate and 316L stainless steel enclosures available

Commercial data

Item number	1191882
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL20
Product key	CL1481
GTIN	4063151243142
Weight per piece (including packing)	3,380 g
Weight per piece (excluding packing)	3,280 g
Country of origin	US

BXT-4XS-SEC-T3-60-FM - Surge protection device



1191882

<https://www.phoenixcontact.com/us/products/1191882>

Set consists of

PLT-SEC-T3-60-FM-UT - Type 3 surge protection device

2907917

<https://www.phoenixcontact.com/us/products/2907917>



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 60 V AC/DC

BXT-4XS-SEC-T3-60-FM - Surge protection device



1191882

<https://www.phoenixcontact.com/us/products/1191882>

Technical data

Product properties

Product type	Surge protection for NEMA power supply units
Type	DIN rail module, two-section, divisible
Surge protection fault message	optical
EN type	T2 / T3
Number of ports	One

Electrical properties

Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	Changeover contact

Connection data

Screw thread	M3
Tightening torque, min	0.5 Nm
Conductor cross section flexible min.	0.2 mm²
Conductor cross section flexible max.	2.5 mm²
Conductor cross section, rigid min.	0.2 mm²
Conductor cross section, rigid max.	4 mm²
Connection method	Screw connection
Screw thread	M3

Dimensions

Dimensional drawing	
Width	152 mm
Height	203 mm
Depth	102 mm

Material specifications

Color	Steel/stainless steel color
Housing material	Stainless steel, 316L, electropolished

Protective circuit

Power supplies

Direction of action	L/N-PE & Signal Line-Shield-Earth Ground
Nominal voltage U_N	60 V AC (TN-S)

BXT-4XS-SEC-T3-60-FM - Surge protection device



1191882

<https://www.phoenixcontact.com/us/products/1191882>

Information technology

Max. discharge current $I_{\max}$ (8/20) μs	4 kA (Power)
--	--------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66 / NEMA 4X
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 6000 mm (operating voltage remote contact ≤ 150 V)
Permissible humidity (operation)	5 % ... 95 %

Mounting

Mounting type	Wall mounting
---------------	---------------

BXT-4XS-SEC-T3-60-FM - Surge protection device




1191882

<https://www.phoenixcontact.com/us/products/1191882>

Drawings

Dimensional drawing

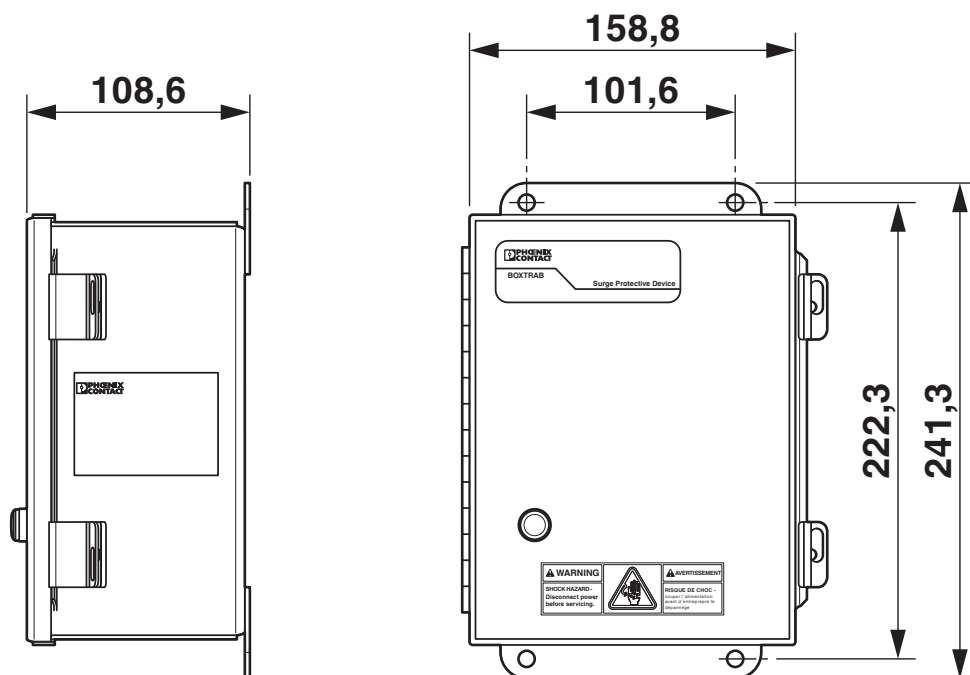


BXT-4XS-SEC-T3-60-FM - Surge protection device

1191882

<https://www.phoenixcontact.com/us/products/1191882>



Connection diagram

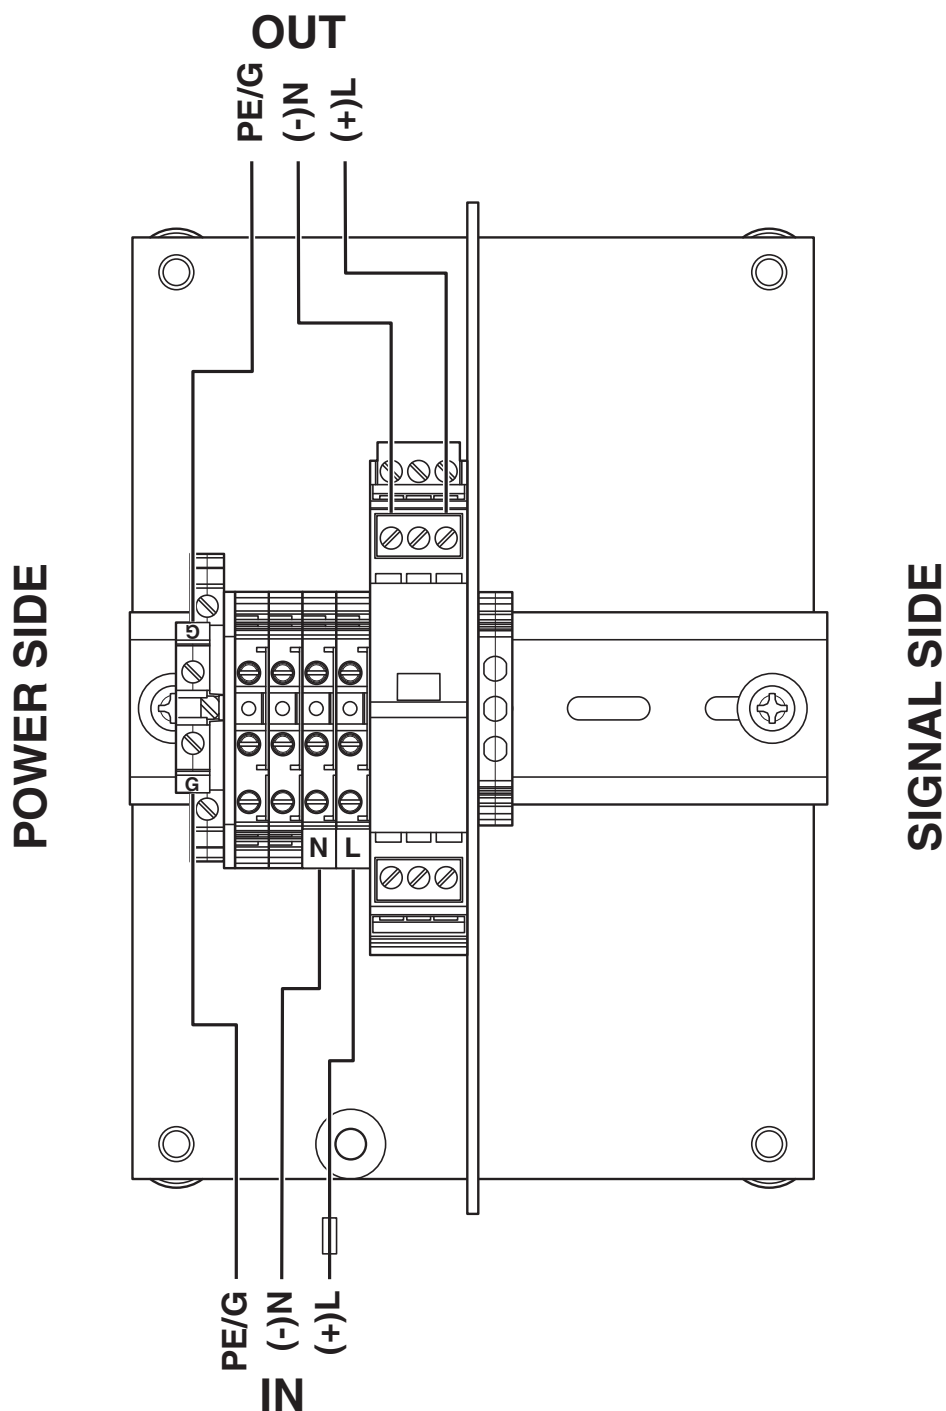

BXT-4XS-SEC-T3-60-FM - Surge protection device



1191882

<https://www.phoenixcontact.com/us/products/1191882>

Classifications

ECLASS

ECLASS-11.0	27130805
ECLASS-13.0	27171203

ETIM

ETIM 9.0	EC000942
----------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

BXT-4XS-SEC-T3-60-FM - Surge protection device



1191882

<https://www.phoenixcontact.com/us/products/1191882>

Accessories

G-ESS-M20-S66L-STES-S - Cable gland

1411076

<https://www.phoenixcontact.com/us/products/1411076>



Cable gland, material for screw connection: Stainless steel 316L, application: Ex, external cable diameter 6.5 mm ... 14 mm, shielding: no, connecting thread: M20 x 1.5, color: silver

G-ESS-M25-M66L-STES-S - Cable gland

1411078

<https://www.phoenixcontact.com/us/products/1411078>



Cable gland, material for screw connection: Stainless steel 316L, application: Ex, external cable diameter 11.1 mm ... 20 mm, shielding: no, connecting thread: M25 x 1.5, color: silver

BXT-4XS-SEC-T3-60-FM - Surge protection device



1191882

<https://www.phoenixcontact.com/us/products/1191882>

G-ESS-M32-M66L-STES-S - Cable gland

1411080

<https://www.phoenixcontact.com/us/products/1411080>



Cable gland, material for screw connection: Stainless steel 316L, application: Ex, external cable diameter 17 mm ... 26.3 mm, shielding: no, connecting thread: M32 x 1.5, color: silver

G-ESS-M40-L66L-STES-S - Cable gland

1411082

<https://www.phoenixcontact.com/us/products/1411082>



Cable gland, material for screw connection: Stainless steel 316L, application: Ex, external cable diameter 23.5 mm ... 32.2 mm, shielding: no, connecting thread: M40 x 1.5, color: silver

BXT-4XS-SEC-T3-60-FM - Surge protection device



1191882

<https://www.phoenixcontact.com/us/products/1191882>

G-ESS-M50-L66L-STES-S - Cable gland

1411085

<https://www.phoenixcontact.com/us/products/1411085>



Cable gland, material for screw connection: Stainless steel 316L, application: Ex, external cable diameter 35.6 mm ... 44.1 mm, shielding: no, connecting thread: M50 x 1.5, color: silver

SZS 0,6X3,5 VDE - Screwdriver

1212602

<https://www.phoenixcontact.com/us/products/1212602>



Screwdriver, slot-headed, VDE insulated, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

BXT-4XS-SEC-T3-60-FM - Surge protection device



1191882

<https://www.phoenixcontact.com/us/products/1191882>

PLT-SEC-T3-60-P-UT/PT - Type 3 surge protection plug

2907921

<https://www.phoenixcontact.com/us/products/2907921>



Replacement plug for type 3 surge protection from the PLT-SEC-...-UT/PT product series. Nominal voltage 60 V.

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com