


# CES-STPG-GY-2ASI-LL - Cable sleeve



1410071

<https://www.phoenixcontact.com/us/products/1410071>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable sleeve, small, no. of conductors: 2, type: AS-i cable (Left Left), slotted, material: SEBS (halogen-free), color: gray, length: 29.5 mm, width: 19.5 mm, height: 17 mm

## Product description

Slotted cable sleeve

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1410071             |
| Packing unit                         | 10 pc               |
| Minimum order quantity               | 1 pc                |
| Sales key                            | BF67                |
| Product key                          | BF7CCX              |
| Catalog page                         | Page 681 (C-2-2019) |
| GTIN                                 | 4046356776226       |
| Weight per piece (including packing) | 7.12 g              |
| Weight per piece (excluding packing) | 7.12 g              |
| Customs tariff number                | 40169997            |
| Country of origin                    | PL                  |

# CES-STPG-GY-2ASI-LL - Cable sleeve



1410071

<https://www.phoenixcontact.com/us/products/1410071>

## Technical data


### Product properties

|                   |              |
|-------------------|--------------|
| Product type      | Cable sleeve |
| No. of conductors | 2            |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 01 |
|------------------|----|

### Dimensions

|                     |                                                                                    |
|---------------------|------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 19.5 mm                                                                            |
| Height              | 17 mm                                                                              |
| Length              | 29.5 mm                                                                            |

### Material specifications

|                                        |                     |
|----------------------------------------|---------------------|
| Material                               | SEBS (halogen-free) |
| Flammability rating according to UL 94 | V0                  |

### Characteristics

|                         |            |
|-------------------------|------------|
| Conductor sealing range | AS-i cable |
| Seal size               | small      |
| Design, Format          | AS-i cable |
| Design, Cable seal      | slotted    |

### Environmental and real-life conditions

#### Ambient conditions

|                                 |                           |
|---------------------------------|---------------------------|
| Degree of protection            | IP54                      |
| Ambient temperature (operation) | -40 °C ... 80 °C (static) |

# CES-STPG-GY-2ASI-LL - Cable sleeve




1410071

<https://www.phoenixcontact.com/us/products/1410071>

## Drawings

Dimensional drawing

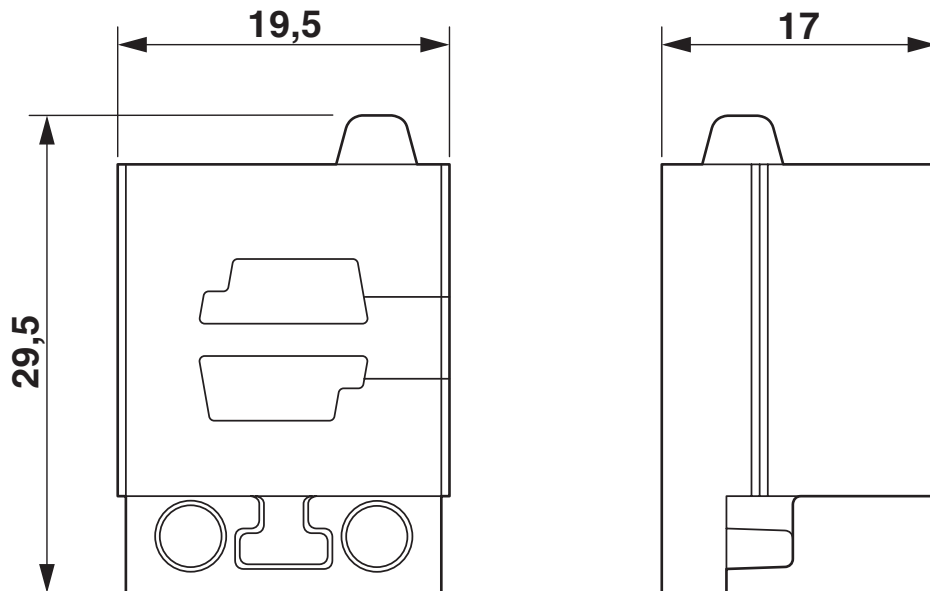

Dimensional drawing

# CES-STPG-GY-2ASI-LL - Cable sleeve



1410071

<https://www.phoenixcontact.com/us/products/1410071>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1410071>



**cUL Recognized**  
Approval ID: NITW8.E255026



**UL Recognized**  
Approval ID: NITW2.E255026

**cULus Recognized**

# CES-STPG-GY-2ASI-LL - Cable sleeve



1410071

<https://www.phoenixcontact.com/us/products/1410071>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27144425 |
| ECLASS-12.0 | 27144425 |
| ECLASS-13.0 | 27144425 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000451 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# CES-STPG-GY-2ASI-LL - Cable sleeve



1410071

<https://www.phoenixcontact.com/us/products/1410071>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# CES-STPG-GY-2ASI-LL - Cable sleeve



1410071

<https://www.phoenixcontact.com/us/products/1410071>

## Accessories

### CES-B10-HFFS-PLBK - Sealing frame

0801663

<https://www.phoenixcontact.com/us/products/0801663>



Sealing frame, With locking latch, design: B10, Number of cable seals (small): 6, material: PA (halogen-free), color: black, length: 99.2 mm, width: 58 mm, height: 20 mm

---

### CES-B16-HFFS-PLBK - Sealing frame

0801662

<https://www.phoenixcontact.com/us/products/0801662>



Sealing frame, With locking latch, design: B16, Number of cable seals (small): 8, material: PA (halogen-free), color: black, length: 120 mm, width: 58 mm, height: 20 mm

# CES-STPG-GY-2ASI-LL - Cable sleeve

1410071

<https://www.phoenixcontact.com/us/products/1410071>



## CES-B24-HFFS-PLBK - Sealing frame

0801661

<https://www.phoenixcontact.com/us/products/0801661>



Sealing frame, With locking latch, design: B24, Number of cable seals (small): 10, material: PA (halogen-free), color: black, length: 147 mm, width: 58 mm, height: 20 mm

---

## CES-B10-SFFS-PLBK - Sealing frame

0801660

<https://www.phoenixcontact.com/us/products/0801660>



Sealing frame, with screw locking, design: B10, Number of cable seals (small): 6, material: PA (halogen-free), color: black, length: 99.2 mm, width: 58 mm, height: 20 mm

# CES-STPG-GY-2ASI-LL - Cable sleeve

1410071

<https://www.phoenixcontact.com/us/products/1410071>



## CES-B16-SFFS-PLBK - Sealing frame

0801659

<https://www.phoenixcontact.com/us/products/0801659>



Sealing frame, with screw locking, design: B16, Number of cable seals (small): 8, material: PA (halogen-free), color: black, length: 120 mm, width: 58 mm, height: 20 mm

---

## CES-B24-SFFS-PLBK - Sealing frame

0801658

<https://www.phoenixcontact.com/us/products/0801658>



Sealing frame, with screw locking, design: B24, Number of cable seals (small): 10, material: PA (halogen-free), color: black, length: 147 mm, width: 58 mm, height: 20 mm

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)