

1413964

<https://www.phoenixcontact.com/us/products/1413964>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



SC-RJ panel mounting frame, IP67, for push-pull interlocking, metal, for rectangular mounting cutout, with seal and mounting screws, incl. SC-RJ coupling

Your advantages

- High reliability with comprehensive quality assurance measures
- Intuitive front-panel operation and clear control cabinet layout thanks to uniform design

Commercial data

Item number	1413964
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB17
Product key	ABNODE
Catalog page	Page 369 (C-2-2019)
GTIN	4055626082387
Weight per piece (including packing)	34.1 g
Weight per piece (excluding packing)	31.6 g
Customs tariff number	85367000
Country of origin	PL

FOC-V14-F1ZNI-EM/SJB - Panel-mount frame



1413964
<https://www.phoenixcontact.com/us/products/1413964>

Technical data

Notes

General	This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 8.2 Connectors for Outside Environment (Balanced cabling) and chapter 13 Application specific Cabling and Interconnection Technology (AIDA)
---------	--

Product properties

Product type	Panel-mount frame
Type	SC-RJ
Number of positions	2
Connection profile	SC-RJ

Data management status

Article revision	01
------------------	----


Insulation characteristics

Degree of pollution	2
---------------------	---

Electrical properties

Transmission medium	FO
---------------------	----

Dimensions

Dimensional drawing	
Width	22.2 mm
Height	42 mm

Mechanical characteristics

Ferrule diameter	2.50 mm
------------------	---------

Material specifications

Material	Metal
Flammability rating according to UL 94	V0
Seal material	NBR
Ferrule material	Zirconia ceramics
Housing material	Metal
Housing surface material	nickel-plated
Contact carrier material	PPA

FOC-V14-F1ZNI-EM/SJB - Panel-mount frame



1413964

<https://www.phoenixcontact.com/us/products/1413964>

Cable/line

External cable diameter	≤ 10.00 mm (of 5 mm)
Resistance to oil	yes
Flame resistance	yes

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 50
-----------------------------	------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65/IP67
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-10 °C ... 40 °C
Resistance to oil	yes

Standards and regulations

Flame resistance	yes
Resistance to oil	yes


FOC-V14-F1ZNI-EM/SJB - Panel-mount frame

1413964

<https://www.phoenixcontact.com/us/products/1413964>

Drawings

Dimensional drawing

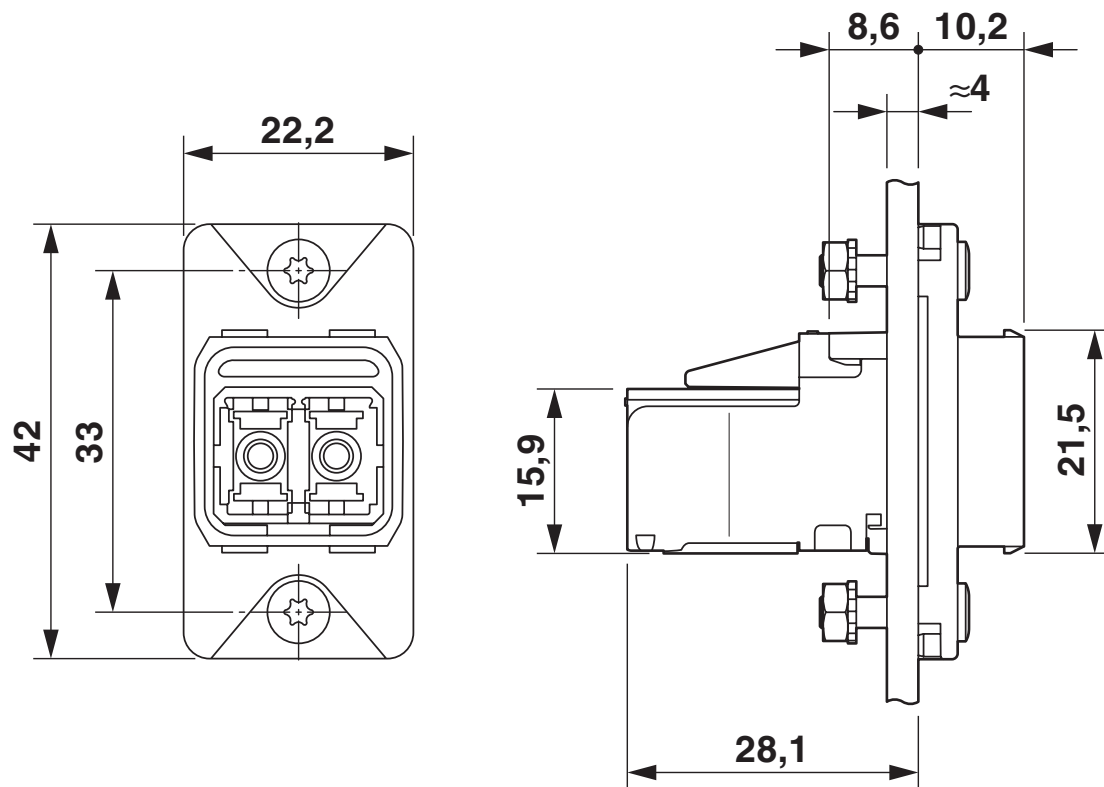


FOC-V14-F1ZNI-EM/SJB - Panel-mount frame

1413964

<https://www.phoenixcontact.com/us/products/1413964>



Drilling plan/solder pad geometry

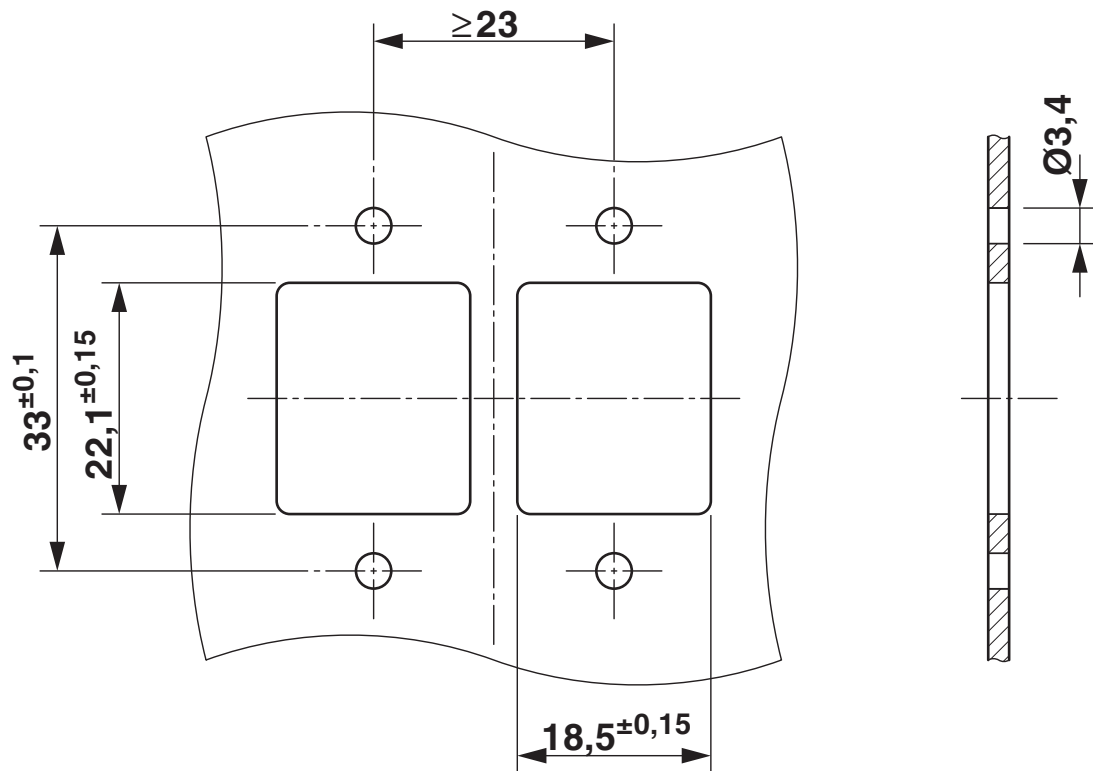

FOC-V14-F1ZNI-EM/SJB - Panel-mount frame



1413964

<https://www.phoenixcontact.com/us/products/1413964>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1413964>



UL Listed

Approval ID: E308814-20180830

FOC-V14-F1ZNI-EM/SJB - Panel-mount frame



1413964

<https://www.phoenixcontact.com/us/products/1413964>

Classifications

ECLASS

ECLASS-11.0	27440210
ECLASS-12.0	27440210
ECLASS-13.0	27440210

ETIM

ETIM 9.0	EC002310
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

FOC-V14-F1ZNI-EM/SJB - Panel-mount frame

1413964

<https://www.phoenixcontact.com/us/products/1413964>



Accessories

CUC-V14-A-SCREW-M3:20 - Panel-mount frame

1413987

<https://www.phoenixcontact.com/us/products/1413987>

Screw set, M3 for panel mounting frames



FOC-V14-C1ZNI-S/SJFP - FO connectors

1407896

<https://www.phoenixcontact.com/us/products/1407896>



FO connectors, degree of protection: IP65/IP67, number of positions: 2, MM, material: Metal, cable outlet: straight

FOC-V14-F1ZNI-EM/SJB - Panel-mount frame

1413964

<https://www.phoenixcontact.com/us/products/1413964>



CUC-V14-A1PBK-PC - Panel-mount frame

1413970

<https://www.phoenixcontact.com/us/products/1413970>

Panel-mount frame, degree of protection: IP65/IP67



CUC-V14-A1RBK-PC - Panel-mount frame

1413985

<https://www.phoenixcontact.com/us/products/1413985>

Panel-mount frame, degree of protection: IP65



FOC-V14-F1ZNI-EM/SJB - Panel-mount frame

1413964

<https://www.phoenixcontact.com/us/products/1413964>



CUC-V14-A1ZNI-R45 - Panel-mount frame

1413988

<https://www.phoenixcontact.com/us/products/1413988>

45° adapter for panel mounting frames



CUC-V14-A1ZNI-S180 - Panel-mount frame

1413989

<https://www.phoenixcontact.com/us/products/1413989>

Spacer for panel mounting frames



FOC-V14-F1ZNI-EM/SJB - Panel-mount frame

1413964

<https://www.phoenixcontact.com/us/products/1413964>



CUC-V14-A3ST-SR - Panel-mount frame

1413990

<https://www.phoenixcontact.com/us/products/1413990>

Panel-mount frame, degree of protection: IP65/IP67, material: Stainless steel



CUC-V14-A1PBK-BA:50 - Panel-mount frame

1413979

<https://www.phoenixcontact.com/us/products/1413979>

Holder for marking element



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com