

# G-INS-M20-S68N-PNES-LG - Cable gland



1414568

<https://www.phoenixcontact.com/us/products/1414568>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: lightgray RAL 7035

## Your advantages

- Plastic material conforms to UL 746C f1

## Commercial data

Item number	1414568
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF68
Product key	BF7DCX
Catalog page	Page 686 (C-2-2019)
GTIN	4055626029207
Weight per piece (including packing)	10.62 g
Weight per piece (excluding packing)	10 g
Customs tariff number	39269097
Country of origin	TR

# G-INS-M20-S68N-PNES-LG - Cable gland



1414568  
<https://www.phoenixcontact.com/us/products/1414568>

## Technical data

### Mounting

Assembly note	1) Mount screw connection support in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque
---------------	---

### Product properties

Product type	Cable screw gland
Application	Standard
No. of conductors	1
Manufacturer	BIMED
Manufacturer Designation	BM-12
Shielded	no
Execution of the strain relief	A

### Data management status

Article revision	00
------------------	----

### Characteristics

Category of shock impact	2
Design, Strain relief	A

### Dimensions

Dimensional drawing	
Length	42 mm
Length of the connecting thread	10 mm
Hole diameter	20.1 mm ... 20.2 mm
Wrench size, union nut	24 mm
Wrench size, support	24 mm
Hexagon angular dimension	27.8 mm
Thread type connection side	M20 x 1.5
Thread pitch	1.5 mm

### Connection data

Tightening torque	4 Nm ±0.5 Nm (Cap nut) 3.5 Nm (Support sleeve)
-------------------	---

### Material specifications

Color	light gray (RAL 7035)
-------	-----------------------

# G-INS-M20-S68N-PNES-LG - Cable gland



1414568

<https://www.phoenixcontact.com/us/products/1414568>

Flammability rating according to UL 94	V2
Seal material Cable seal	CR
Material for screw connection	PA

## Cable/line

External cable diameter Cable 1	6 mm ... 12 mm
External cable diameter	9 mm ... 12 mm (for UL 514 B)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP66
	IP68 (5 bar / 0.5 h)
Enclosure rating (NEMA)	1
	4
	4X
	12
	13
Ambient temperature (operation)	-40 °C ... 100 °C (static)

# G-INS-M20-S68N-PNES-LG - Cable gland


1414568

<https://www.phoenixcontact.com/us/products/1414568>



## Drawings

Dimensional drawing

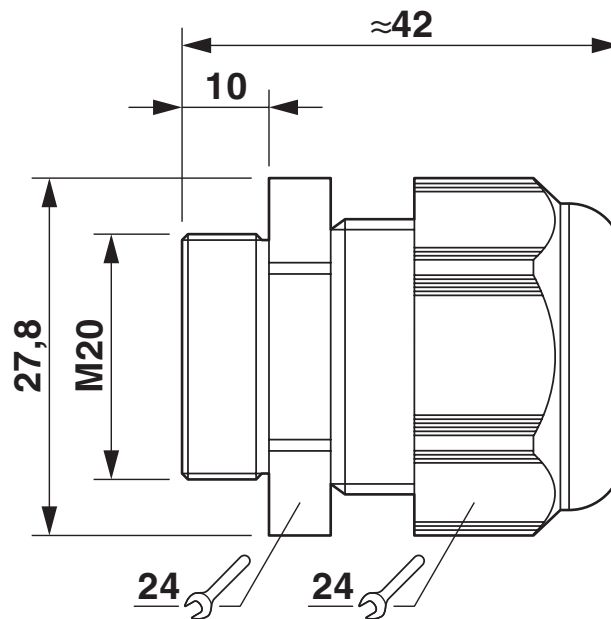

Dimensional drawing


# G-INS-M20-S68N-PNES-LG - Cable gland



1414568

<https://www.phoenixcontact.com/us/products/1414568>

## Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1414568>

### DNV

Approval ID: TAE00003WX



### UL Listed

Approval ID: E199260

# G-INS-M20-S68N-PNES-LG - Cable gland



1414568

<https://www.phoenixcontact.com/us/products/1414568>

## Classifications

### ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

### ETIM

ETIM 8.0	EC000441
----------	----------

### UNSPSC

UNSPSC 21.0	39121300
-------------	----------

# G-INS-M20-S68N-PNES-LG - Cable gland



1414568

<https://www.phoenixcontact.com/us/products/1414568>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

# G-INS-M20-S68N-PNES-LG - Cable gland

1414568

<https://www.phoenixcontact.com/us/products/1414568>



## Accessories

### A-INL-M20-P-LG - Counter nut

1414570

<https://www.phoenixcontact.com/us/products/1414570>

Counter nut, for threads M20 x 1.5, color: light gray



---

### SEALING PLUG 9X16 RD - Sealing plug

1400259

<https://www.phoenixcontact.com/us/products/1400259>

Sealing plug, color: red



---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)