

1418387

https://www.phoenixcontact.com/us/products/1418387

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PROFINET patch cable, shielded, star quad, 22 AWG stranded (19-wire), green, straight RJ45 connector / IP20, to straight RJ45 connector / IP20, length: 2 m

### Commercial data

Item number	1418387
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB11
Product key	ABNABA
GTIN	4046356534611
Weight per piece (including packing)	152 g
Weight per piece (excluding packing)	128.76 g
Customs tariff number	85444210
Country of origin	PL



1418387

https://www.phoenixcontact.com/us/products/1418387

### Technical data

## Product properties

Product type	Data cable preassembled
Sensor type	PROFINET
Number of positions	4
Connection profile	RJ45 8(4)
No. of cable outlets	1
Shielded	yes
Cable outlet	straight

#### Data management status

Data management status	
Article revision	05
Insulation characteristics	
Degree of pollution	1

### Electrical properties

Rated voltage (III/3)	72 V (DC)
Rated current	1.75 A
Transmission medium	Copper
Transmission characteristics (category)	CAT5 (IEC 11801:2002)
Transmission speed	100 Mbps

### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	≥ 750
Insertion force per signal contact	50.00 N
Extraction force per signal contact	30 N

#### Material specifications

Flammability rating according to UL 94	V2
Housing material	PA 6.6
Contact material	CuSn
Contact surface material	Ni/Au

#### Connector

#### Connection 1

Туре	Plug straight RJ45
Shielded	yes
Degree of protection	IP20

#### Connection 2

Connection 2		
Туре	Plug straight RJ45	



1418387

https://www.phoenixcontact.com/us/products/1418387

Shielded	yes
Insertion/withdrawal cycles	≥ 750
Degree of protection	IP20

#### Cable/line

ле/ште	
Cable length	2.00 m
ROFINET drag chain CAT5 [93C]	
Shielded	yes
Cable type	PROFINET drag chain CAT5
Cable type (abbreviation)	93C
Signal type/category	PROFINET CAT5 (IEC 11801:2002), 100 Mbps
Cable structure	1x4xAWG22/19, S/TQ
External cable diameter	6.50 mm
Outer sheath, material	PUR
External sheath, color	green RAL 6018
Conductor material	Tin-plated Cu litz wires
Conductor structure signal line	19x 0.15 mm
AWG signal line	22
Conductor cross section	4x 0.38 mm²
Wire diameter incl. insulation	1.5 mm 0.1 mm
Single wire, color	white, yellow, blue, orange
Wave impedance	100 Ω ±15 Ω (at 1 100 MHz)
Number of bending cycles	5000000
Bending radius	60 mm
Traversing rate	3 m/s

### Environmental and real-life conditions

#### Ambient conditions

Acceleration

Degree of protection	IP20
	IP20
Ambient temperature (operation)	-25 °C 80 °C

 $3 \text{ m/s}^2$ 




1418387

https://www.phoenixcontact.com/us/products/1418387

## Drawings

### Dimensional drawing

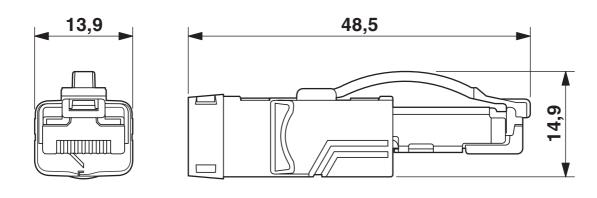

RJ45 connector, IP20



1418387

https://www.phoenixcontact.com/us/products/1418387

### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1418387



EAC

Approval ID: 19060508



1418387

https://www.phoenixcontact.com/us/products/1418387

## Classifications

UNSPSC 21.0

#### **ECLASS**

ECLASS-11.0	27060308
ECLASS-12.0	27060308
ECLASS-13.0	27060307
ETIM	
ETIM 9.0	EC002599
UNSPSC	

26121600



1418387

https://www.phoenixcontact.com/us/products/1418387

## Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com