

# CUC-DST-GZNI-S/DSSC15 - D-SUB sleeve housings



1419724

<https://www.phoenixcontact.com/us/products/1419724>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



D-SUB sleeve housings, degree of protection: IP20, material: Zinc die-cast, cable outlet: straight, housing size: 2, color: Bare metallic

## Your advantages

- Easy to mount thanks to preassembled locking screws
- Angled conductor entry
- Antimagnetic plastic housing

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1419724       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | AB19          |
| Product key                          | ABNCAE        |
| GTIN                                 | 4055626188034 |
| Weight per piece (including packing) | 58.9 g        |
| Weight per piece (excluding packing) | 58.9 g        |
| Customs tariff number                | 85389099      |
| Country of origin                    | DE            |

# CUC-DST-GZNI-S/DSSC15 - D-SUB sleeve housings



1419724

<https://www.phoenixcontact.com/us/products/1419724>

## Technical data

### Product properties

|                      |                 |
|----------------------|-----------------|
| Product type         | Sleeve housings |
| Type                 | D-SUB           |
| No. of cable outlets | 1               |
| Cable outlet         | straight        |


### Data management status

|                  |    |
|------------------|----|
| Article revision | 00 |
|------------------|----|

### Connection data

|              |          |
|--------------|----------|
| Screw thread | 4-40 UNC |
|--------------|----------|

### Dimensions

|                     |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 40 mm                                                                               |
| Height              | 15.2 mm                                                                             |
| Depth               | 62 mm                                                                               |

### Material specifications

|                                        |               |
|----------------------------------------|---------------|
| Color                                  | Bare metallic |
| Flammability rating according to UL 94 | V0            |
| Housing material                       | Zinc die-cast |
| Housing surface material               | nickel-plated |

### Cable/line

|                         |                                              |
|-------------------------|----------------------------------------------|
| External cable diameter | 3 mm ... 8.5 mm (Without bending protection) |
|-------------------------|----------------------------------------------|

### Environmental and real-life conditions

#### Ambient conditions


|                                 |                   |
|---------------------------------|-------------------|
| Degree of protection            | IP20              |
| Ambient temperature (operation) | -35 °C ... 100 °C |

### Mounting

|               |                         |
|---------------|-------------------------|
| Mounting type | Screw locking mechanism |
|---------------|-------------------------|

## Drawings

Dimensional drawing

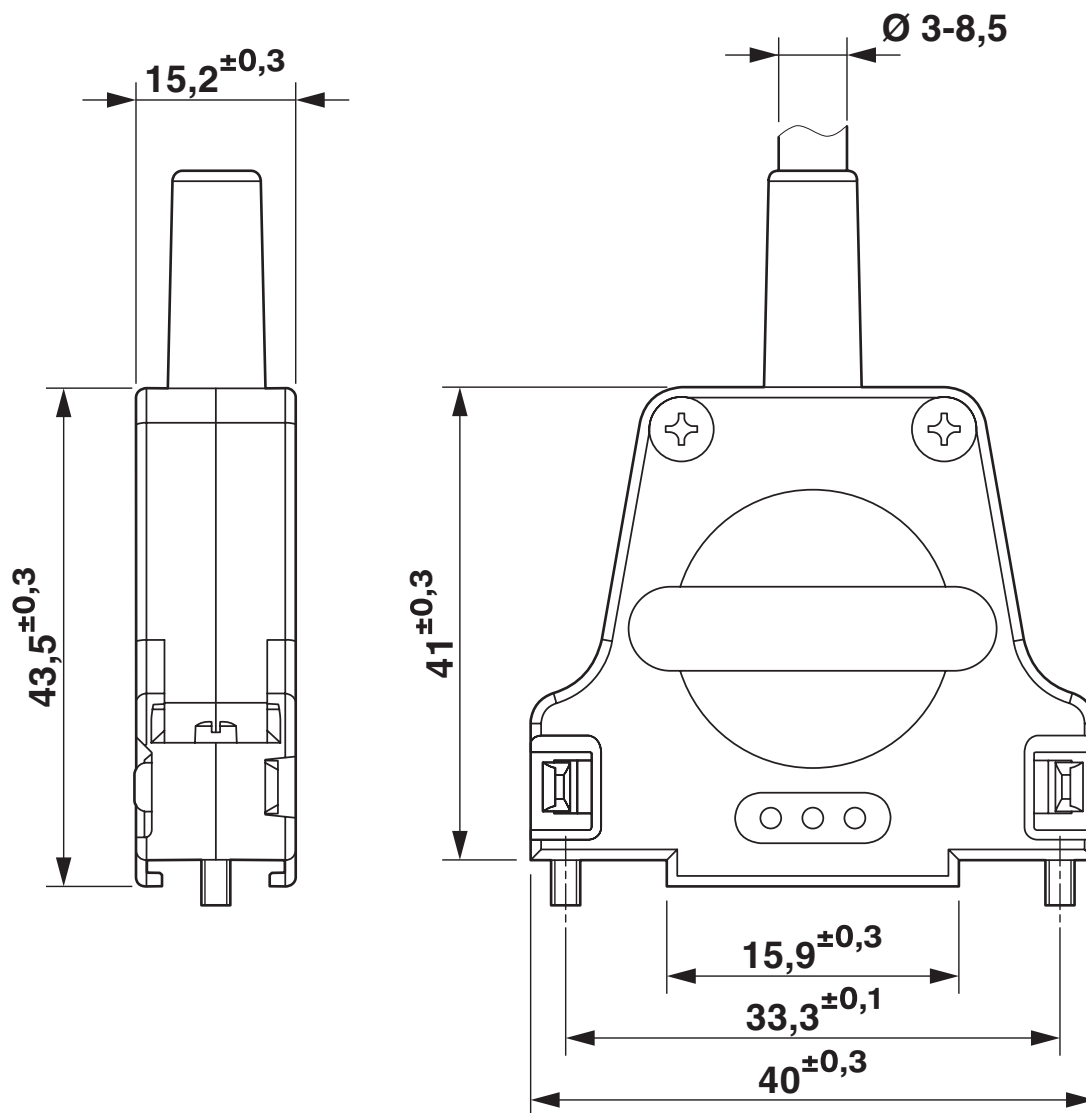


D-SUB sleeve housings

1419724

<https://www.phoenixcontact.com/us/products/1419724>

Schematic diagram

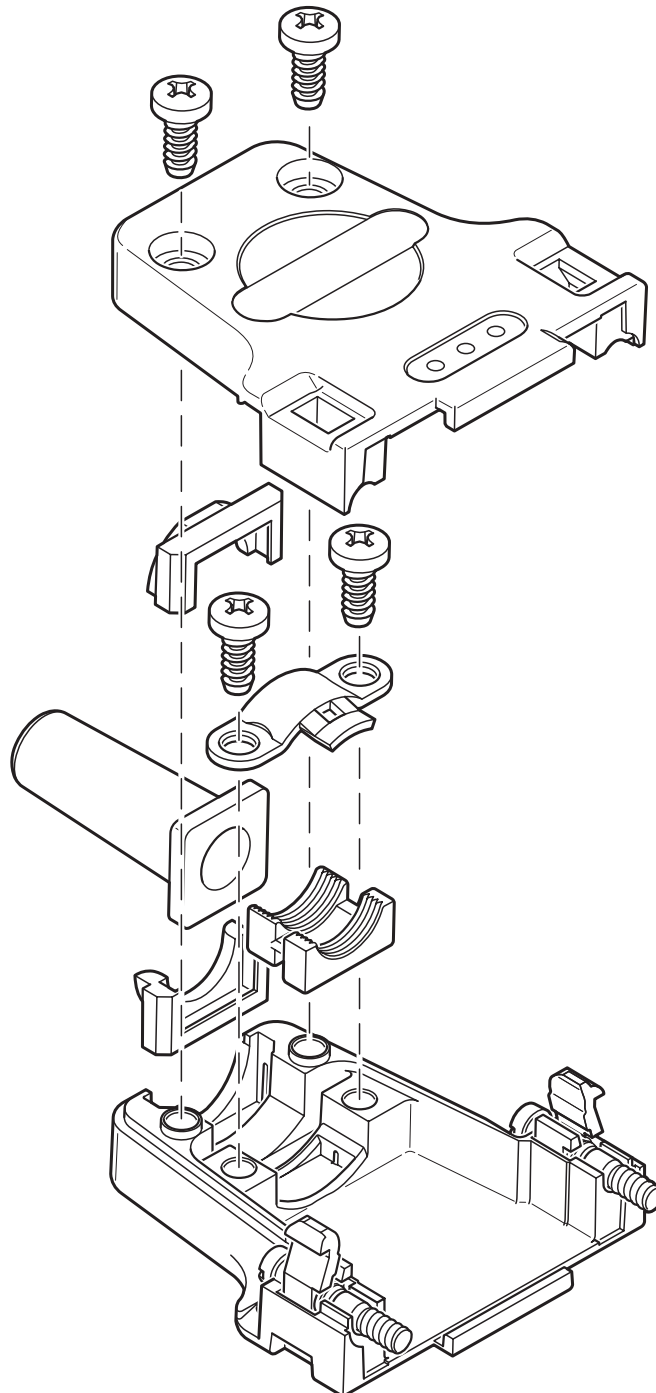

# CUC-DST-GZNI-S/DSSC15 - D-SUB sleeve housings



1419724

<https://www.phoenixcontact.com/us/products/1419724>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440202 |
| ECLASS-12.0 | 27440202 |
| ECLASS-13.0 | 27440202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000437 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

1419724

<https://www.phoenixcontact.com/us/products/1419724>

## Accessories

### VS-15-ST-DSUB-EG - Contact insert

1688874

<https://www.phoenixcontact.com/us/products/1688874>

D-SUB contact insert, shell size 2, with 15 signal contacts, type of contact pin, with solder cup, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...



---

### VS-15-BU-DSUB-EG - Contact insert

1688887

<https://www.phoenixcontact.com/us/products/1688887>

D-SUB contact insert, shell size 2, with 15 signal contacts, type of contact socket, with solder cup, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...



# CUC-DST-GZNI-S/DSSC15 - D-SUB sleeve housings



1419724

<https://www.phoenixcontact.com/us/products/1419724>

## VS-15-ST-DSUB-HD-EG - D-SUB contact insert

1655179

<https://www.phoenixcontact.com/us/products/1655179>

D-SUB contact insert, shell size 2, with 26 signal contacts, type of contact pin, with solder cup, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...



---

## VS-15-BU-DSUB-HD-EG - D-SUB contact insert

1655166

<https://www.phoenixcontact.com/us/products/1655166>

D-SUB contact insert, shell size 2, with 26 signal contacts, type of contact socket, with solder cup, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...





# CUC-DST-GZNI-S/DSSC15 - D-SUB sleeve housings



1419724

<https://www.phoenixcontact.com/us/products/1419724>

## VS-15-ST-DSUB-CD-OG - D-SUB contact support

1688939

<https://www.phoenixcontact.com/us/products/1688939>

D-SUB contact carrier, shell size 2, for 15 signal contacts, type of contact pin, for crimp contacts, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...



---

## VS-15-BU-DSUB-CD-OG - D-SUB contact support

1688942

<https://www.phoenixcontact.com/us/products/1688942>

D-SUB contact carrier, shell size 2, for 15 signal contacts, type of contact socket, for crimp contacts, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...



# CUC-DST-GZNI-S/DSSC15 - D-SUB sleeve housings



1419724

<https://www.phoenixcontact.com/us/products/1419724>

## VS-15-ST-DSUB-HD-CD-B - D-SUB contact support

1655195

<https://www.phoenixcontact.com/us/products/1655195>

D-SUB contact carrier, shell size 2, for 26 signal contacts, type of contact pin, for crimp contacts, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...



---

## VS-15-BU-DSUB-HD-CD-B - D-SUB contact support

1655182

<https://www.phoenixcontact.com/us/products/1655182>

D-SUB contact carrier, shell size 2, for 26 signal contacts, type of contact socket, for crimp contacts, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...



# CUC-DST-GZNI-S/DSSC15 - D-SUB sleeve housings



1419724

<https://www.phoenixcontact.com/us/products/1419724>

## VS-15-ST-DSUB-3P - D-SUB contact support

1688201

<https://www.phoenixcontact.com/us/products/1688201>

D-SUB contact carrier, shell size 2, accommodation for three combined contacts, type of contact pin, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...



---

## VS-15-BU-DSUB-3P - D-SUB contact support

1688214

<https://www.phoenixcontact.com/us/products/1688214>

D-SUB contact carrier, shell size 2, accommodation for three combined contacts, type of contact socket, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...



---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)