

HC-D 25-EBUC - Contact insert

1772405

<https://www.phoenixcontact.com/us/products/1772405>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON female insert, D25 series, 25-pos., crimp connection

Commercial data

Item number	1772405
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	BF61
Product key	BF7ABE
Catalog page	Page 439 (PC-2009)
GTIN	4017918037079
Weight per piece (including packing)	47.1 g
Weight per piece (excluding packing)	38 g
Customs tariff number	85366990
Country of origin	DE

HC-D 25-EBUC - Contact insert



1772405

<https://www.phoenixcontact.com/us/products/1772405>

Technical data

Notes

General	For HC-D25 housing, crimp contacts CK1,6-ED (crimp contacts not included in scope of supply)
---------	--

Mounting

Assembly note	Connectors may be operated only when there is no load/voltage. - Use of HC-CST (1676857) coding pins and HC-CBU (1676860) coding sockets has been prescribed.
---------------	--


Product properties

Product type	Contact insert with a fixed no. of positions
Type	D25
Number of positions	25
Connection profile	25+PE

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	22.8 mm
Height	34.5 mm
Length	72 mm
Drill hole distance, vertical	16 mm

Connection data

Connection technology

Connection technology	Crimp connection
Connection in acc. with standard	IEC / EN

Conductor connection

Conductor cross section	0.14 mm ² ... 2.5 mm ²
Connection cross section AWG	26 ... 14
Stripping length of the individual wire	8 mm 6 mm (2.5 mm ²)

Electrical properties

Rated voltage (III/3)	250 V
-----------------------	-------

HC-D 25-EBUC - Contact insert



1772405

<https://www.phoenixcontact.com/us/products/1772405>

Rated surge voltage	4 kV
Rated current	10 A
Test voltage	4 kV AC

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PA

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations

Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Tests	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352

HC-D 25-EBUC - Contact insert




1772405

<https://www.phoenixcontact.com/us/products/1772405>

Drawings

Schematic diagram

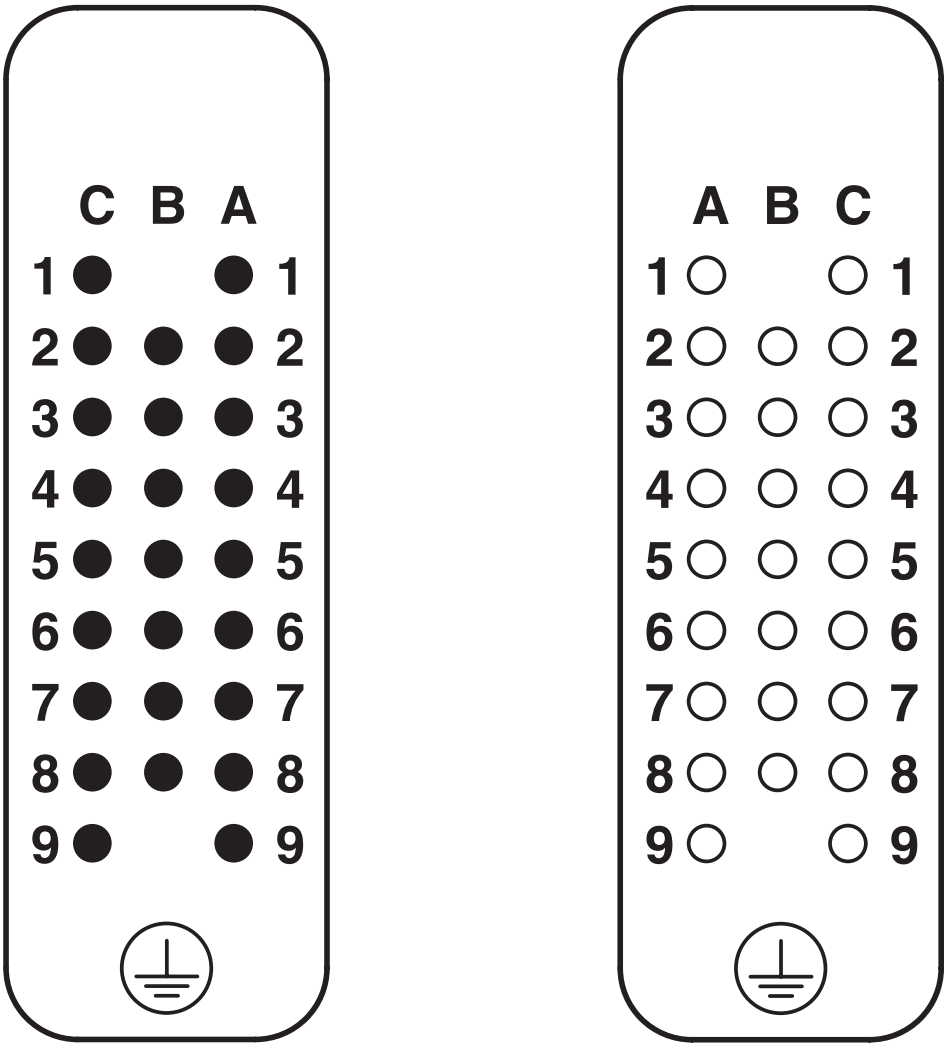

Connector pin assignment connection side: Left pin; right socket


HC-D 25-EBUC - Contact insert

1772405

<https://www.phoenixcontact.com/us/products/1772405>




Dimensional drawing

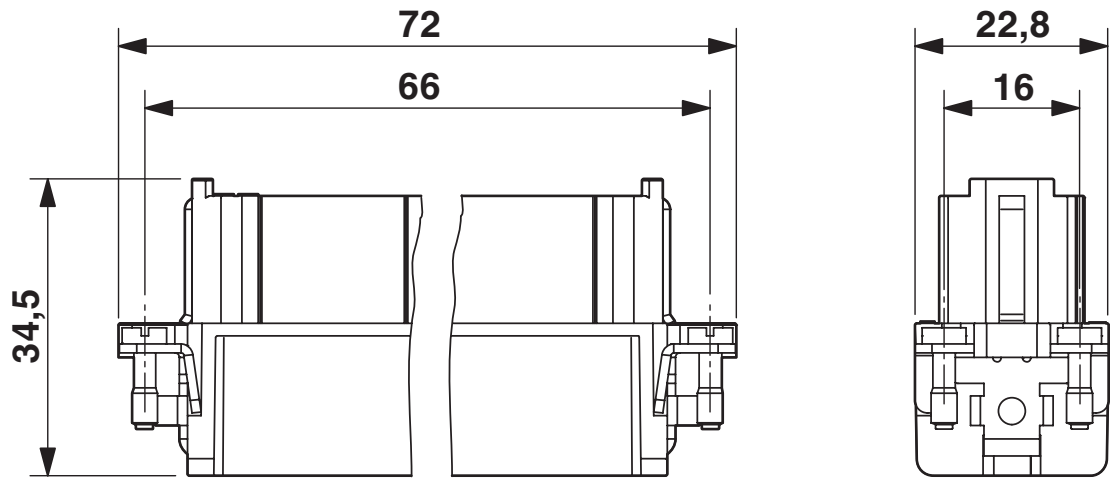

Female insert (turned contacts)

Diagram

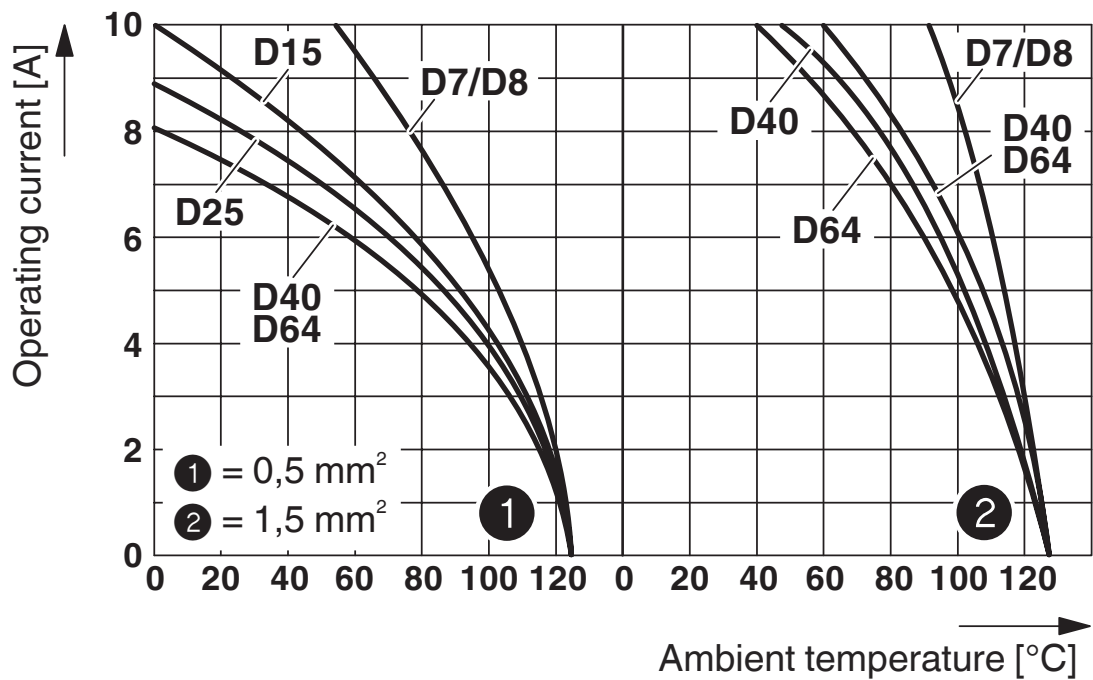

Derating diagram: HC-D...C series


HC-D 25-EBUC - Contact insert

1772405

<https://www.phoenixcontact.com/us/products/1772405>



Dimensional drawing

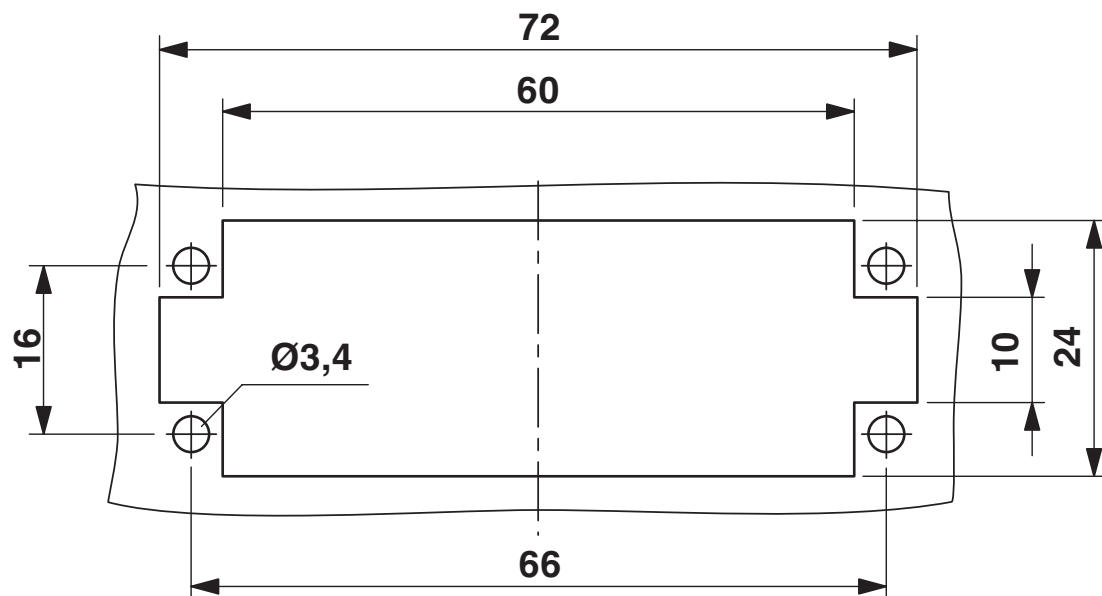

Mounting cutout

HC-D 25-EBUC - Contact insert

1772405

<https://www.phoenixcontact.com/us/products/1772405>



Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-13.0	27440205

HC-D 25-EBUC - Contact insert

1772405

<https://www.phoenixcontact.com/us/products/1772405>



Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

HC-D 25-EBUC - Contact insert

1772405

<https://www.phoenixcontact.com/us/products/1772405>



Accessories

HC-A-PES - Screw

1584868

<https://www.phoenixcontact.com/us/products/1584868>

PE screw for contact inserts of A series



HC-CST - Coding element

1676857

<https://www.phoenixcontact.com/us/products/1676857>

Coding peg for coding up to 16 connectors



HC-D 25-EBUC - Contact insert

1772405

<https://www.phoenixcontact.com/us/products/1772405>



HC-CBU - Coding element

1676860

<https://www.phoenixcontact.com/us/products/1676860>



Coding socket for coding up to 16 connectors

HC-CB - Coding bolt

1772722

<https://www.phoenixcontact.com/us/products/1772722>



Coding pin, prevents mismatching of up to six connectors with an identical number of positions

HC-D 25-EBUC - Contact insert

1772405

<https://www.phoenixcontact.com/us/products/1772405>



HC-SMR-D25 - DIN rail mounting frame

1604023

<https://www.phoenixcontact.com/us/products/1604023>

HEAVYCON DIN rail mounting frame, for contact inserts of type D25



CK1,6-ED-BB - Dummy socket

1645888

<https://www.phoenixcontact.com/us/products/1645888>

Dummy socket for contact carrier with turned CK 1,6-ED.. female contacts



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com