

HC-D 64-ESTC - Contact insert

1772528

<https://www.phoenixcontact.com/us/products/1772528>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 64+PE, size: D64, Pin, Crimp connection, 250 V, 10 A, 0.14 mm² ... 2.5 mm²

Commercial data

Item number	1772528
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	BF61
Product key	BF7ABE
Catalog page	Page 440 (PC-2009)
GTIN	4017918037192
Weight per piece (including packing)	79.78 g
Weight per piece (excluding packing)	79.78 g
Customs tariff number	85366990
Country of origin	DE

HC-D 64-ESTC - Contact insert

1772528

<https://www.phoenixcontact.com/us/products/1772528>



Technical data

Notes

General	For HEAVYCON ADVANCE housings of B24 type and HEAVYCON housings of B24/48 types, crimp contacts CK1,6-ED / CK1,6-BR (crimp contacts not included in the scope of supply)
---------	--

Mounting

Assembly note	Connectors may be operated only when there is no load/voltage. Here, coding pins and sockets have been prescribed to avoid incorrect contacting when plugged in at an angle.
---------------	---


Product properties

Product type	Contact insert with a fixed no. of positions
Type	D64
Number of positions	64
Connection profile	64+PE
Contact numbering	1 - 64

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	34 mm
Height	32.5 mm
Length	111 mm

Connection data

Connection technology

Connection technology	Crimp connection
Connection in acc. with standard	IEC / EN

Conductor connection

Conductor cross section	0.14 mm ² ... 2.5 mm ²
Connection cross section AWG	26 ... 14
Stripping length of the individual wire	8 mm 6 mm (2.5 mm ²)

Electrical properties

HC-D 64-ESTC - Contact insert



1772528

<https://www.phoenixcontact.com/us/products/1772528>

Rated voltage (III/3)	250 V
Rated surge voltage	4 kV
Rated current	10 A
Test voltage	4 kV AC

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PA

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations

Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Tests	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352

HC-D 64-ESTC - Contact insert


1772528

<https://www.phoenixcontact.com/us/products/1772528>




Drawings

Dimensional drawing

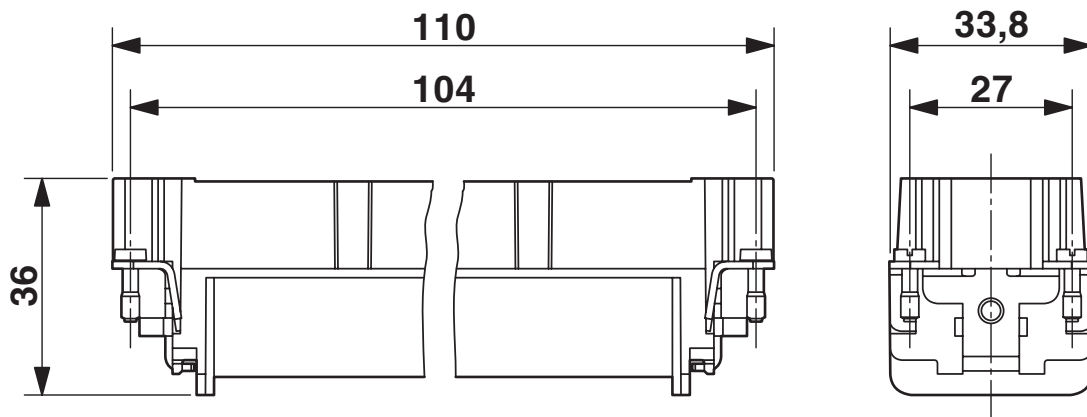

Male insert (turned contacts)

Dimensional drawing

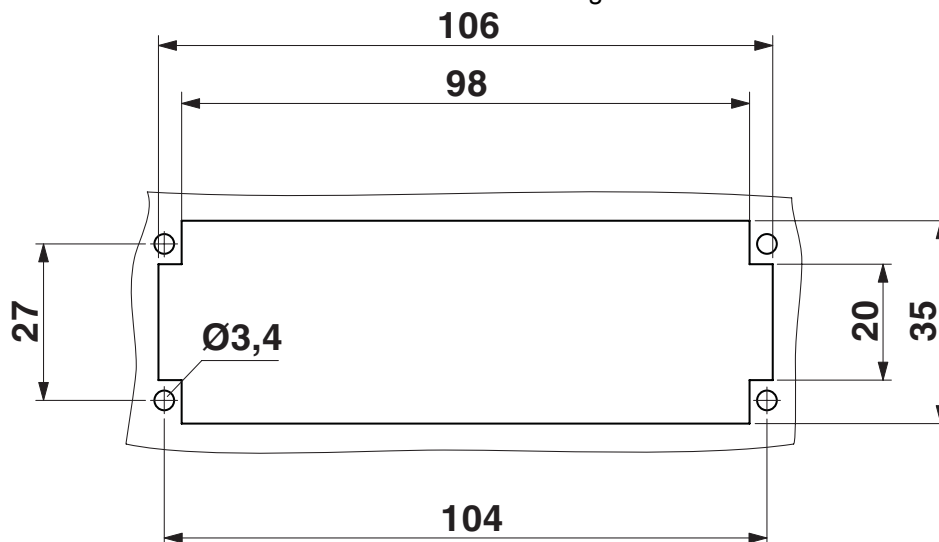


Mounting cutout

HC-D 64-ESTC - Contact insert

1772528

<https://www.phoenixcontact.com/us/products/1772528>

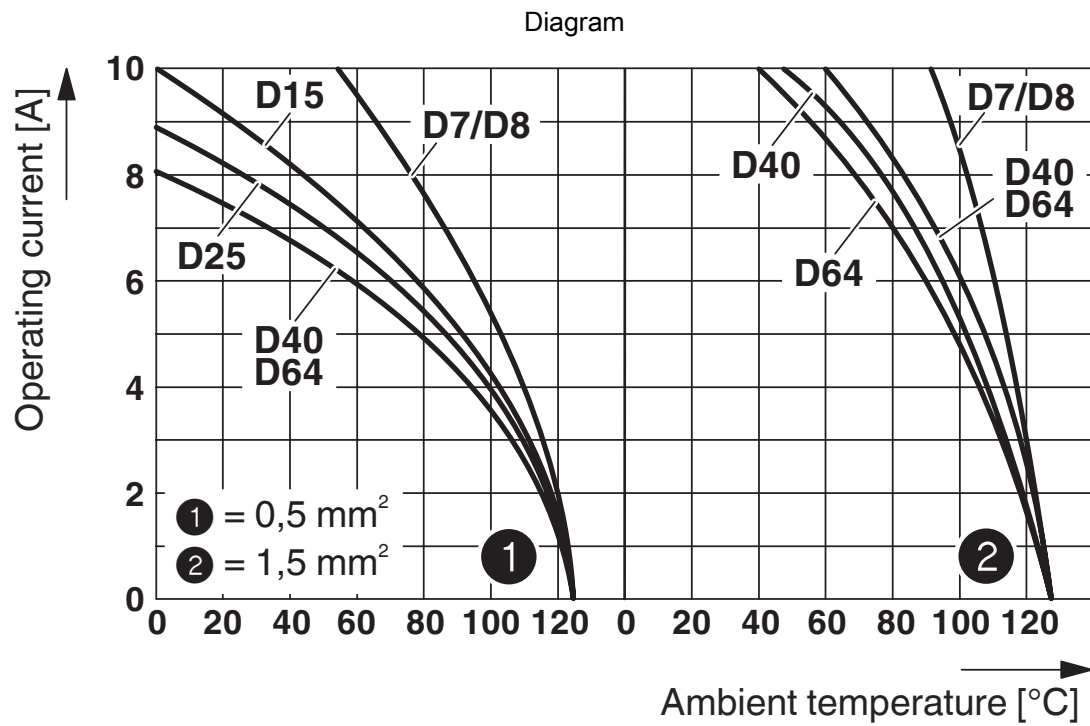


Derating diagram: HC-D...C series

1772528

<https://www.phoenixcontact.com/us/products/1772528>

Schematic diagram

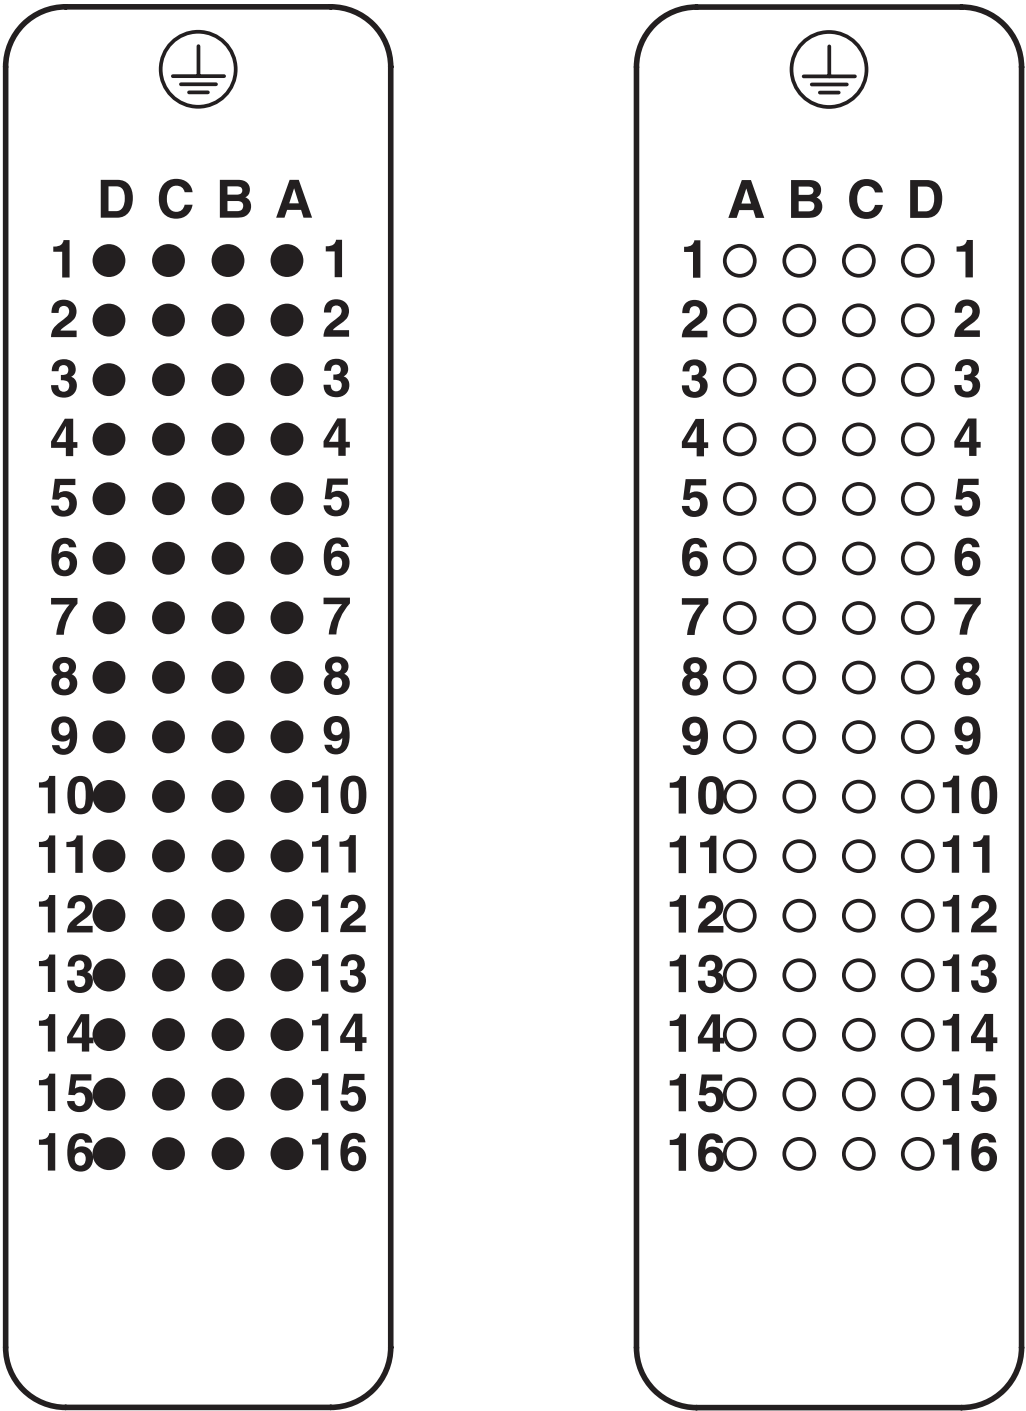

Connector pin assignment, connection side

HC-D 64-ESTC - Contact insert

1772528

<https://www.phoenixcontact.com/us/products/1772528>



Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-13.0	27440205

HC-D 64-ESTC - Contact insert

1772528

<https://www.phoenixcontact.com/us/products/1772528>



Accessories

HC-B-PES - Screw

1604997

<https://www.phoenixcontact.com/us/products/1604997>

PE screw, for contact inserts HC-B / HC-BB / HC-DD / HC-D40 / HC-D64



HC-B-3PE - PE multiplier

1644326

<https://www.phoenixcontact.com/us/products/1644326>

PE multiplier, for 3 PE connections, for HC-B / HC-BB / HC-DD / HC-D40 / HC-D64 contact inserts



HC-D 64-ESTC - Contact insert

1772528

<https://www.phoenixcontact.com/us/products/1772528>



HC-CBU - Coding element

1676860

<https://www.phoenixcontact.com/us/products/1676860>



Coding socket for coding up to 16 connectors

HC-CB - Coding bolt

1772722

<https://www.phoenixcontact.com/us/products/1772722>



Coding pin, prevents mismatching of up to six connectors with an identical number of positions

HC-D 64-ESTC - Contact insert

1772528

<https://www.phoenixcontact.com/us/products/1772528>



HC-B-ZG - Strain relief clamp

1685327

<https://www.phoenixcontact.com/us/products/1685327>



Strain relief clamps contact inserts of series: B-, BB-, D 40, D 64, DD and HV, straight cable exit

HC-B-ZS - Strain relief clamp

1685330

<https://www.phoenixcontact.com/us/products/1685330>



Strain relief clamps contact inserts of series: B-, BB-, D 40, D 64, DD and HV, lateral cable exit

HC-D 64-ESTC - Contact insert

1772528

<https://www.phoenixcontact.com/us/products/1772528>



HC-CST - Coding element

1676857

<https://www.phoenixcontact.com/us/products/1676857>



Coding peg for coding up to 16 connectors

HC-SMR-B24 - DIN rail mounting frame

1687985

<https://www.phoenixcontact.com/us/products/1687985>



HEAVYCON DIN rail mounting frame, for contact inserts of type B24

HC-D 64-ESTC - Contact insert

1772528

<https://www.phoenixcontact.com/us/products/1772528>



HC-SMP 150-B24-AMQ - DIN rail mounting frame

1660944

<https://www.phoenixcontact.com/us/products/1660944>



HEAVYCON DIN rail mounting frame with panel mounting base with double locking latch, for contact inserts of type B24, 150 mm long

HC-B 24-ANDOCK - Docking frame

1586141

<https://www.phoenixcontact.com/us/products/1586141>



Docking frame for racks, for contact inserts of B24 type, with four M5 flat headed screws, rack balance x/y axis ± 1.5 mm

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com