


HC-B 16-EBUS 32 - Contact insert

1775619

<https://www.phoenixcontact.com/us/products/1775619>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON female insert, B16 series, 16-pos., screw connection, numbering 17 ... 32

Commercial data

Item number	1775619
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	BF61
Product key	BF7ABC
Catalog page	Page 345 (PC-2007)
GTIN	4017918038199
Weight per piece (including packing)	115.46 g
Weight per piece (excluding packing)	99.3 g
Customs tariff number	85366990
Country of origin	DE

HC-B 16-EBUS 32 - Contact insert



1775619

<https://www.phoenixcontact.com/us/products/1775619>

Technical data

Notes

General	For HEAVYCON-ADVANCE housing of B16 type and HEAVYCON housing of B16/B32 type
---------	---

Mounting

Assembly note	For housings of type B16/B32. Connectors may only be actuated when there is no load/voltage.
---------------	--


Product properties

Product type	Contact insert with a fixed no. of positions
Type	B16
Number of positions	16
Connection profile	16+PE
Contact numbering	17 - 32

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	34 mm
Height	37.5 mm
Length	84.5 m

Connection data

Connection technology

Connection technology	Screw connection
Connection in acc. with standard	IEC / EN

Conductor connection

Conductor cross section	0.5 mm ² ... 2.5 mm ² (applies to stranded conductors with ferrules) 0.5 mm ² ... 4 mm ² (PE screw)
Connection cross section AWG	20 ... 14 20 ... 12 (PE screw)
Tightening torque	0.5 Nm
Stripping length of the individual wire	7 mm

HC-B 16-EBUS 32 - Contact insert



1775619

<https://www.phoenixcontact.com/us/products/1775619>

Electrical properties

Rated voltage (III/3)	500 V
Rated surge voltage	6 kV
Rated current	16 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PA

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations

Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Tests	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352

HC-B 16-EBUS 32 - Contact insert




1775619

<https://www.phoenixcontact.com/us/products/1775619>


Drawings

Dimensional drawing

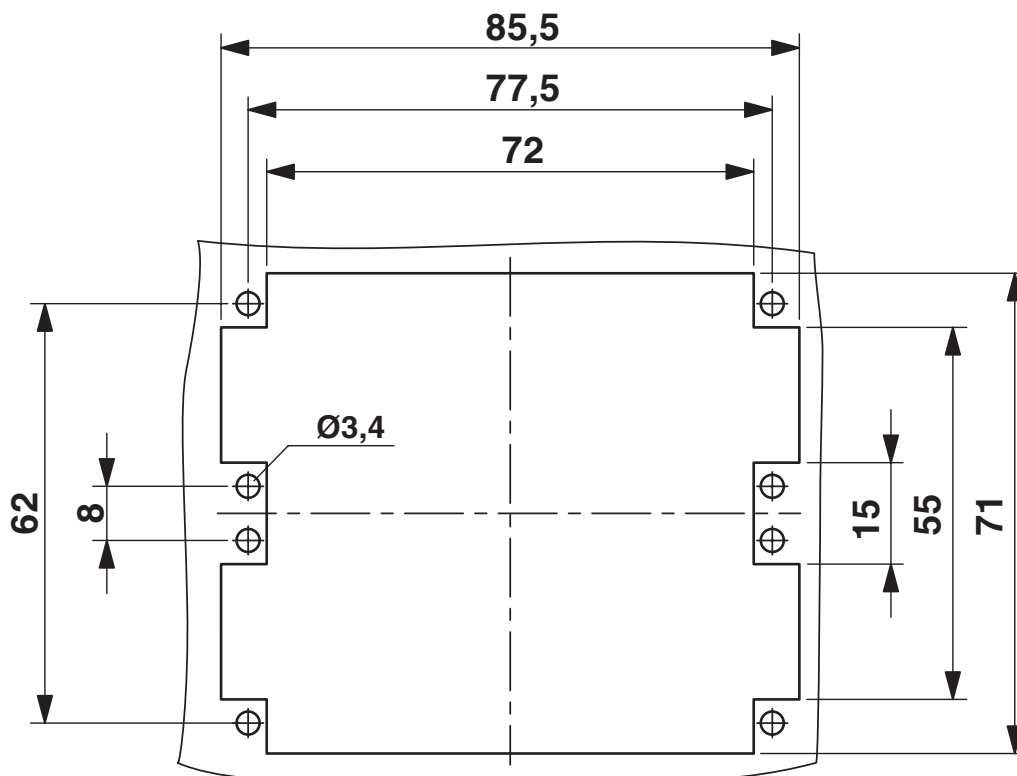

Mounting cutout

Dimensional drawing

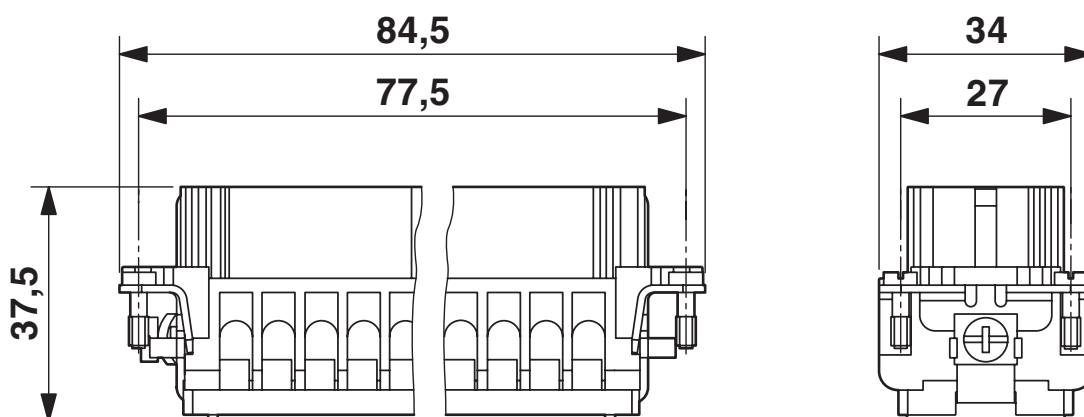


Female insert

HC-B 16-EBUS 32 - Contact insert

1775619


<https://www.phoenixcontact.com/us/products/1775619>

Schematic diagram

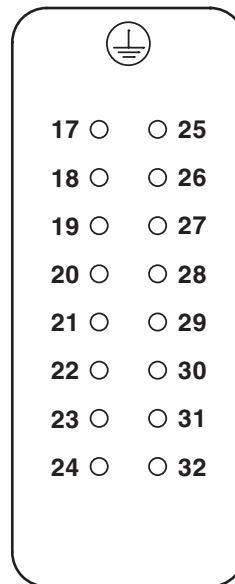

Connector pin assignment, connection side

Diagram

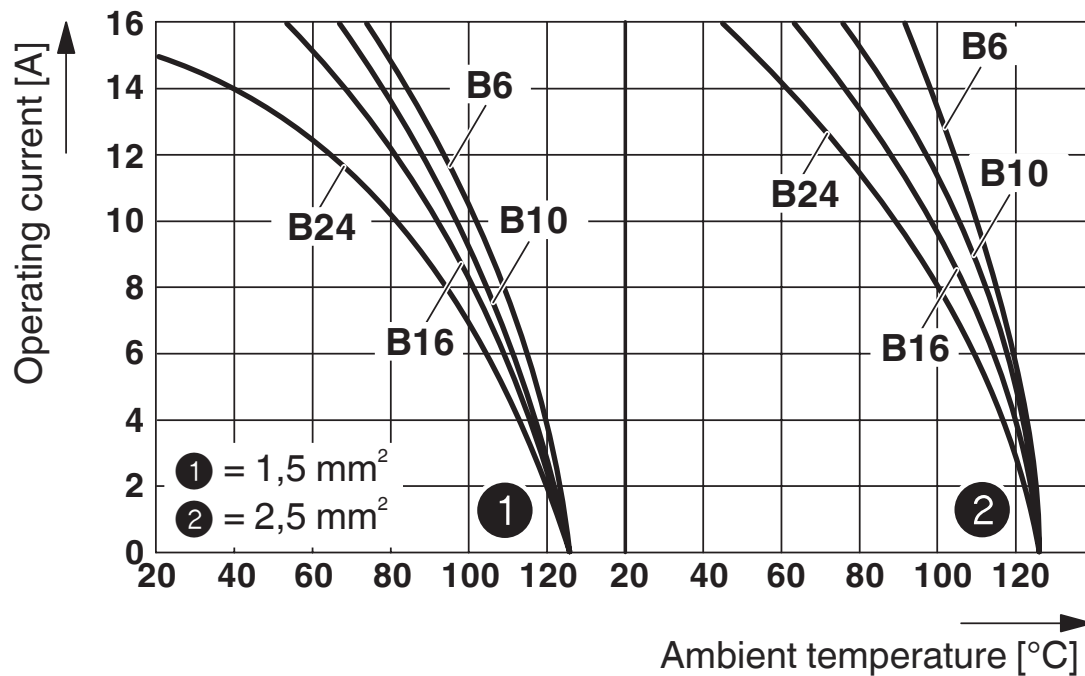

Derating diagram: Series HC-B...S / HC-B...C

HC-B 16-EBUS 32 - Contact insert



1775619

<https://www.phoenixcontact.com/us/products/1775619>

Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-13.0	27440205

HC-B 16-EBUS 32 - Contact insert



1775619

<https://www.phoenixcontact.com/us/products/1775619>

Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

HC-B 16-EBUS 32 - Contact insert



1775619

<https://www.phoenixcontact.com/us/products/1775619>

Accessories

HC-B-PES - Screw

1604997

<https://www.phoenixcontact.com/us/products/1604997>



PE screw, for contact inserts HC-B / HC-BB / HC-DD / HC-D40 / HC-D64

HC-CST - Coding element

1676857

<https://www.phoenixcontact.com/us/products/1676857>



Coding peg for coding up to 16 connectors

HC-B 16-EBUS 32 - Contact insert

1775619

<https://www.phoenixcontact.com/us/products/1775619>



HC-CBU - Coding element

1676860

<https://www.phoenixcontact.com/us/products/1676860>



Coding socket for coding up to 16 connectors

HC-CB - Coding bolt

1772722

<https://www.phoenixcontact.com/us/products/1772722>



Coding pin, prevents mismatching of up to six connectors with an identical number of positions

HC-B 16-EBUS 32 - Contact insert

1775619

<https://www.phoenixcontact.com/us/products/1775619>



HC-B-3PE - PE multiplier

1644326

<https://www.phoenixcontact.com/us/products/1644326>

PE multiplier, for 3 PE connections, for HC-B / HC-BB / HC-DD / HC-D40 / HC-D64 contact inserts



HC-B-ZG - Strain relief clamp

1685327

<https://www.phoenixcontact.com/us/products/1685327>

Strain relief clamps contact inserts of series: B-, BB-, D 40, D 64, DD and HV, straight cable exit



HC-B 16-EBUS 32 - Contact insert

1775619

<https://www.phoenixcontact.com/us/products/1775619>



HC-B-ZS - Strain relief clamp

1685330

<https://www.phoenixcontact.com/us/products/1685330>



Strain relief clamps contact inserts of series: B-, BB-, D 40, D 64, DD and HV, lateral cable exit

HC-SMR-B16 - DIN rail mounting frame

1687972

<https://www.phoenixcontact.com/us/products/1687972>



HEAVYCON DIN rail mounting frame, for contact inserts of type B16

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com