


# FLKM-D50 SUB/S - Interface module



2281157  
<https://www.phoenixcontact.com/us/products/2281157>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE module, with screw connection and D-Subminiature pin strip, for mounting on NS 35/7.5 or NS 32, 50-pos.

## Commercial data

Item number	2281157
Packing unit	5 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	C422
Product key	CK2182
Catalog page	Page 225 (IF-2002)
GTIN	4017918054601
Weight per piece (including packing)	236.1 g
Weight per piece (excluding packing)	236.1 g
Customs tariff number	85369010
Country of origin	DE

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## Technical data

### Product properties

Product type	Interface module
Product family	VARIOFACE
Operating mode	100% operating factor

### Data management status

Article revision	12
------------------	----

### Insulation characteristics: Air clearances and creepage distances

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

### Electrical properties

Operating voltage (AC)	≤ 30 V AC
Operating voltage (DC)	≤ 60 V DC
Current (per branch)	≤ 2.5 A
Current (Total current)	≤ 90 A

### Air clearances and creepage distances

Rated insulation voltage	125 V
Rated surge voltage	1.2 kV (1.2/50 µs)

## Connection data

### Connection 1 (control level)

Connection in acc. with standard	IEC 60807-2
Connection method	D-SUB pin strip
Screw thread	UNC 4-40
Number of connections	1
Number of positions	50
Insertion/withdrawal cycles	> 500
Pitch	2.77 mm

### Connection 2 (field level)

Connection method	Screw connection
Stripping length	7 mm
Screw thread	M3
Number of positions	34
Conductor cross section rigid	0.2 mm² ... 4 mm²
Conductor cross-section rigid (2 conductors with same cross section)	0.2 mm² ... 1.5 mm²
Conductor cross section flexible	0.2 mm² ... 2.5 mm² 0.25 mm² ... 1.5 mm² (Ferrule without plastic sleeve)

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

	0.25 mm² ... 2.5 mm² (Ferrule with plastic sleeve)
Conductor cross section flexible (2 conductors with same cross section)	0.2 mm² ... 1.5 mm²
	0.25 mm² ... 0.75 mm² (Ferrule without plastic sleeve)
	0.5 mm² ... 0.5 mm² (TWIN ferrule with plastic sleeve)
Conductor cross section AWG	24 ... 12
Tightening torque	0.5 Nm ... 0.6 Nm
Pitch	5.08 mm

## Connection 3 (field level)

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Number of positions	18
Conductor cross section rigid	0.2 mm² ... 4 mm²
Conductor cross-section rigid (2 conductors with same cross section)	0.2 mm² ... 1.5 mm²
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
	0.25 mm² ... 2.5 mm² (Ferrule without plastic sleeve)
	0.25 mm² ... 2.5 mm² (Ferrule with plastic sleeve)
Conductor cross section flexible (2 conductors with same cross section)	0.2 mm² ... 1.5 mm²
	0.25 mm² ... 0.75 mm² (Ferrule without plastic sleeve)
	0.5 mm² ... 1.5 mm² (TWIN ferrule with plastic sleeve)
Conductor cross section AWG	24 ... 12
Tightening torque	0.5 Nm ... 0.6 Nm
Pitch	5.08 mm

## Signaling

Status display present	No
------------------------	----

## Dimensions

### Item dimensions

Width	112.5 mm
Height	77 mm
Depth	57.47 mm

## Material specifications

Color	green (RAL 6021)
Housing insulation material	Polyamide 6 green

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (Module)	IP20
Degree of protection (Installation location)	≥ IP54
Ambient temperature (operation)	-20 °C ... 50 °C

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

Ambient temperature (storage/transport)	-20 °C ... 70 °C
Altitude	≤ 2000 m

## Approvals

### UKCA

Certificate	UKCA-compliant
-------------	----------------

## Standards and regulations

### Air clearances and creepage distances

Standards/regulations	EN IEC 60664-1
-----------------------	----------------

## Mounting

Mounting type	DIN rail mounting
Assembly note	in rows with zero spacing
Mounting position	any

## Notes

Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
--------------------	--

# FLKM-D50 SUB/S - Interface module


2281157

<https://www.phoenixcontact.com/us/products/2281157>



## Drawings

Circuit diagram

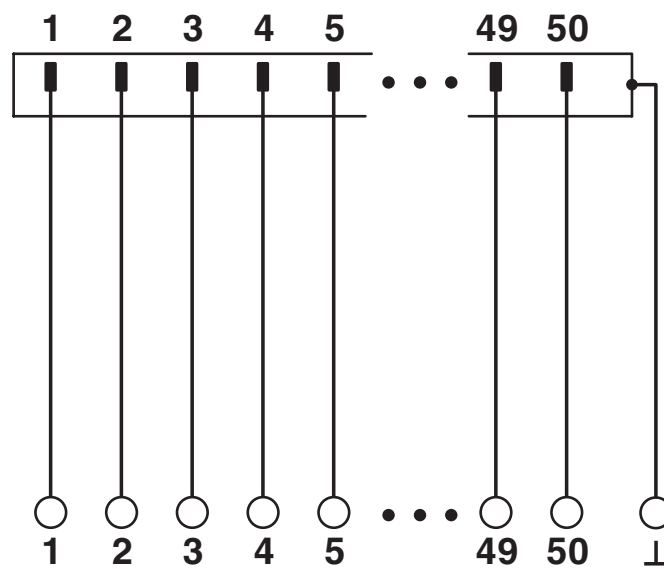


# FLKM-D50 SUB/S - Interface module

2281157

<https://www.phoenixcontact.com/us/products/2281157>

Schematic diagram

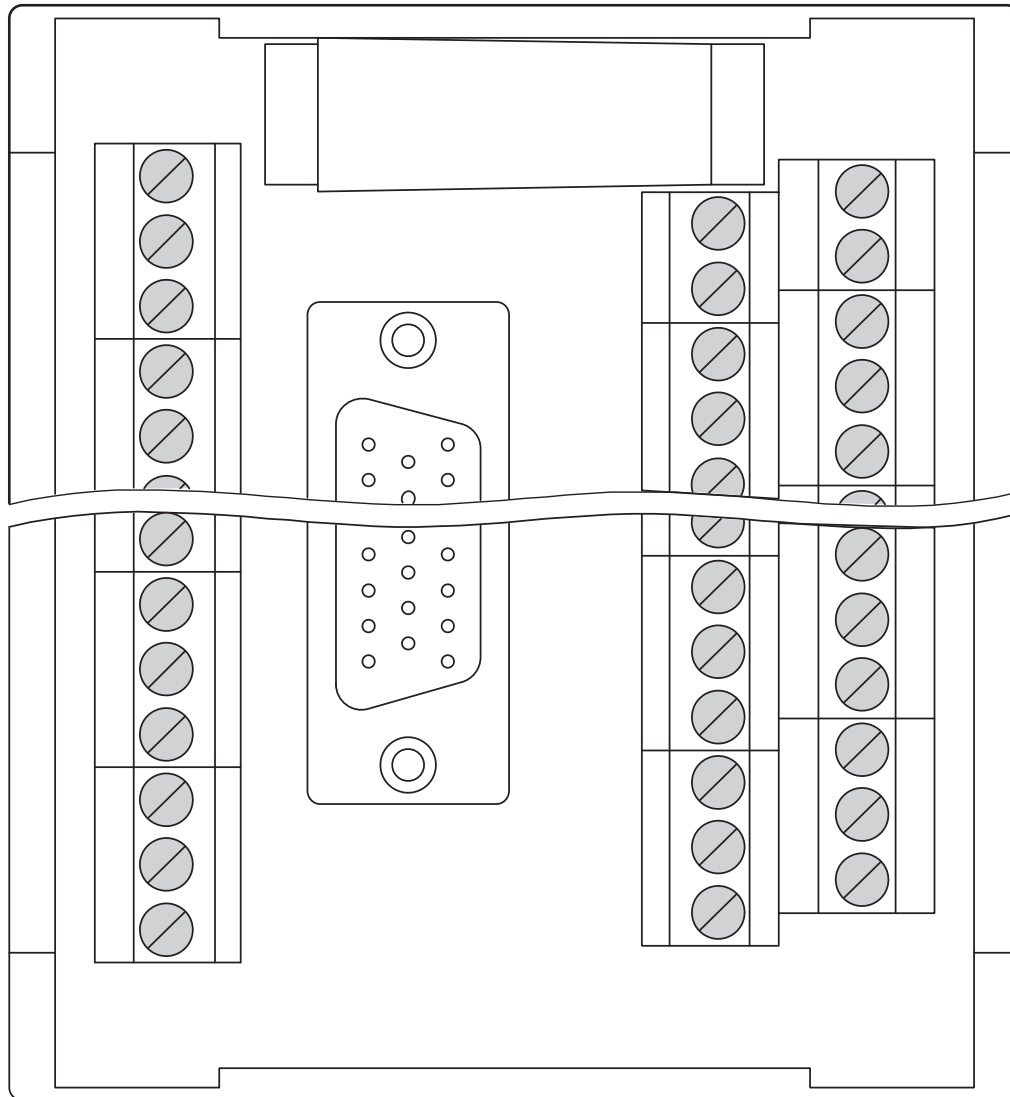

# FLKM-D50 SUB/S - Interface module





2281157

<https://www.phoenixcontact.com/us/products/2281157>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2281157>

 <b>cUL Recognized</b> Approval ID: E118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Field wiring	125 V	2.5 A	30 - 12	-

 <b>UL Recognized</b> Approval ID: E118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Field wiring	125 V	2.5 A	30 - 12	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## Classifications

### ECLASS

ECLASS-11.0	27141152
ECLASS-13.0	27141152
ECLASS-12.0	27141152

### ETIM

ETIM 8.0	EC002780
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------



# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## Accessories

### CABLE D-SUB-S/.../.../... - Cable

2302340

<https://www.phoenixcontact.com/us/products/2302340>



Shielded round cable, assembled with one D-SUB female and pin strip (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

---

### CABLE D-SUB-B-B-S/.../.../... - Cable

2302421

<https://www.phoenixcontact.com/us/products/2302421>



Shielded round cable, assembled with two D-SUB female strips (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## CABLE-D50SUB/B/S/ 50/KONFEK/S - Cable

2302269

<https://www.phoenixcontact.com/us/products/2302269>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 50-position); connection 2: D-SUB pin strip (1x 50-position); cable length: 0.5 m

---

## CABLE-D50SUB/B/S/100/KONFEK/S - Cable

2302272

<https://www.phoenixcontact.com/us/products/2302272>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 50-position); connection 2: D-SUB pin strip (1x 50-position); cable length: 1 m

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## CABLE-D50SUB/B/S/150/KONFEK/S - Cable

2302285

<https://www.phoenixcontact.com/us/products/2302285>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 50-position); connection 2: D-SUB pin strip (1x 50-position); cable length: 1.5 m

---

## CABLE-D50SUB/B/S/200/KONFEK/S - Cable

2302298

<https://www.phoenixcontact.com/us/products/2302298>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 50-position); connection 2: D-SUB pin strip (1x 50-position); cable length: 2 m

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## CABLE-D50SUB/B/S/300/KONFEK/S - Cable

2302308

<https://www.phoenixcontact.com/us/products/2302308>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 50-position); connection 2: D-SUB pin strip (1x 50-position); cable length: 3 m

---

## CABLE-D50SUB/B/S/400/KONFEK/S - Cable

2302311

<https://www.phoenixcontact.com/us/products/2302311>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 50-position); connection 2: D-SUB pin strip (1x 50-position); cable length: 4 m

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## CABLE-D50SUB/B/S/600/KONFEK/S - Cable

2302324

<https://www.phoenixcontact.com/us/products/2302324>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 50-position); connection 2: D-SUB pin strip (1x 50-position); cable length: 6 m

---

## CABLE-D50SUB/B/S/HF/S/ 1,0M - Cable

1066678

<https://www.phoenixcontact.com/us/products/1066678>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 50-position); connection 2: D-SUB pin strip (1x 50-position); cable length: 1 m

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## CABLE-D50SUB/B/S/HF/S/ 2,0M - Cable

1066679

<https://www.phoenixcontact.com/us/products/1066679>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 50-position); connection 2: D-SUB pin strip (1x 50-position); cable length: 2 m

---

## CABLE-D50SUB/B/S/HF/S/ 3,0M - Cable

1066681

<https://www.phoenixcontact.com/us/products/1066681>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 50-position); connection 2: D-SUB pin strip (1x 50-position); cable length: 3 m

# FLKM-D50 SUB/S - Interface module

2281157

<https://www.phoenixcontact.com/us/products/2281157>



## CABLE-D50SUB-B-S-HF-S/... - Cable

1075554

<https://www.phoenixcontact.com/us/products/1075554>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 50-position); connection 2: D-SUB pin strip (1x 50-position); cable length: variable

---

## CABLE-D-50SUB/F/OE/0,25/S/0,5M - Cable

2926292

<https://www.phoenixcontact.com/us/products/2926292>



Assembled shielded round cable; connection 1: Single wires (50-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 50-position); cable length: 0.5 m



# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## CABLE-D-50SUB/F/OE/0,25/S/1,0M - Cable

2926302

<https://www.phoenixcontact.com/us/products/2926302>



Assembled shielded round cable; connection 1: Single wires (50-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 50-position); cable length: 1 m

---

## CABLE-D-50SUB/F/OE/0,25/S/1,5M - Cable

2926315

<https://www.phoenixcontact.com/us/products/2926315>



Assembled shielded round cable; connection 1: Single wires (50-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 50-position); cable length: 1.5 m

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## CABLE-D-50SUB/F/OE/0,25/S/2,0M - Cable

2926328

<https://www.phoenixcontact.com/us/products/2926328>



Assembled shielded round cable; connection 1: Single wires (50-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 50-position); cable length: 2 m

---

## CABLE-D-50SUB/F/OE/0,25/S/3,0M - Cable

2926331

<https://www.phoenixcontact.com/us/products/2926331>



Assembled shielded round cable; connection 1: Single wires (50-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 50-position); cable length: 3 m

# FLKM-D50 SUB/S - Interface module



2281157

<https://www.phoenixcontact.com/us/products/2281157>

## CABLE-D-50SUB/F/OE/0,25/S/4,0M - Cable

2926344

<https://www.phoenixcontact.com/us/products/2926344>



Assembled shielded round cable; connection 1: Single wires (50-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 50-position); cable length: 4 m

---

## CABLE-D-50SUB/F/OE/0,25/S/6,0M - Cable

2926357

<https://www.phoenixcontact.com/us/products/2926357>



Assembled shielded round cable; connection 1: Single wires (50-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 50-position); cable length: 6 m

# FLKM-D50 SUB/S - Interface module

2281157

<https://www.phoenixcontact.com/us/products/2281157>



## CABLE-D-50SUB-F-OE-0,25-S/... - Cable

2900908

<https://www.phoenixcontact.com/us/products/2900908>



Assembled shielded round cable; connection 1: Single wires (50-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 50-position); cable length: variable

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)