

# AXL F BK ETH NET2 - Bus coupler



2702177

<https://www.phoenixcontact.com/us/products/2702177>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Axioline F, Bus coupler, Ethernet (2 networks), RJ45 jack, transmission speed in the local bus: 100 Mbps, degree of protection: IP20, including bus base module and Axioline F connector

## Product description

The bus coupler represents the link between two Ethernet networks (Modbus/TCP) and the Axioline F system. It offers the option of isolated, simultaneous communication in two different networks in order to redundantly create the network infrastructure between the controller and bus coupler. Up to 63 Axioline F devices can be connected to the bus coupler.

## Your advantages

- 2 separate Ethernet ports (without integrated switch)
- 2 IP addresses
- Transmission speed of 10 Mbps and 100 Mbps
- Rotary coding switches for setting the IP address assignment and other functions
- Modbus/TCP (UDP) support
- BootP and DHCP
- Firmware can be updated
- Runtime in the bus coupler is negligible (almost 0  $\mu$ s) (for Modbus/UDP)
- Typical cycle time of the Axioline F local bus is around 10  $\mu$ s

## Commercial data

Item number	2702177
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	DR02
Product key	DRI21B
Catalog page	Page 71 (C-6-2019)
GTIN	4055626008417
Weight per piece (including packing)	229.1 g
Weight per piece (excluding packing)	177 g
Customs tariff number	85176200
Country of origin	DE

# AXL F BK ETH NET2 - Bus coupler




2702177

<https://www.phoenixcontact.com/us/products/2702177>

## Technical data

### Dimensions

Dimensional drawing	
Width	45 mm
Height	126.1 mm
Depth	74 mm
Note on dimensions	The depth applies when a TH 35-7.5 DIN rail is used (in accordance with EN 60715).

### Material specifications

Color	traffic grey A RAL 7042
-------	-------------------------

### Interfaces

Ethernet (2 networks)	
Number of interfaces	2
Connection method	RJ45 jack
Note on the connection method	Auto negotiation and autocrossing
Transmission speed	10/100 Mbps (Half or full duplex mode (automatic detection, can be adjusted manually))
Transmission physics	Ethernet in RJ45 twisted pair

Axioline F local bus	
Number of interfaces	1
Connection method	Bus base module
Transmission speed	100 Mbps

Service	
Number of interfaces	1
Connection method	Micro USB type B

Fieldbus: Local bus gateway	
Max. number of local bus devices	63 (Consider the logic current consumed by the devices)

### System properties

System limits	
Number of supported devices	max. 63 (per station)
Number of local bus devices that can be connected	max. 63

# AXL F BK ETH NET2 - Bus coupler



2702177

<https://www.phoenixcontact.com/us/products/2702177>

## Product properties

Product type	I/O component
Product family	Axioline F
Type	block modular
Mounting position	any (observe temperature derating)
Scope of delivery	including bus base module and Axioline F connector

### Data management status

Article revision	02
------------------	----

### Insulation characteristics

Overvoltage category	II (IEC 60664-1, EN 60664-1)
Pollution degree	2 (IEC 60664-1, EN 60664-1)

## Electrical properties

Potentials: Communications power  $U_L$  feed-in (the supply of the Axioline F local bus  $U_{Bus}$  is generated from  $U_L$ )

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 583 mA (with 2 A at $U_{Bus}$ for the I/Os and $U_L = 24$ V)
Power consumption	max. 14 W (2.0 A on $U_{Bus}$ , $U_L = 24$ V)
Protective circuit	Surge protection; electronic
	Reverse polarity protection; electronic

Potentials: Axioline F local bus supply ( $U_{Bus}$ )

Supply voltage	5 V DC (via bus base module)
Power supply unit	2 A

## Connection data

### Connection technology

Connection name	Axioline F connector
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline F: system and installation" user manual.

### Conductor connection

Connection method	Push-in connection
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

### Axioline F connector

Connection method	Push-in connection
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline F: system and installation" user manual.
Conductor cross section, rigid	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>

# AXL F BK ETH NET2 - Bus coupler



2702177

<https://www.phoenixcontact.com/us/products/2702177>

Conductor cross section, flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C (Mounting position: wall mounting on horizontal DIN rail)
	-25 °C ... 55 °C (Mounting position: any)
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 95 % (non-condensing)

## Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

## Mounting

Mounting type	DIN rail mounting
	DIN rail mounting
Mounting position	any (observe temperature derating)

# AXL F BK ETH NET2 - Bus coupler


2702177

<https://www.phoenixcontact.com/us/products/2702177>



## Drawings

Connection diagram

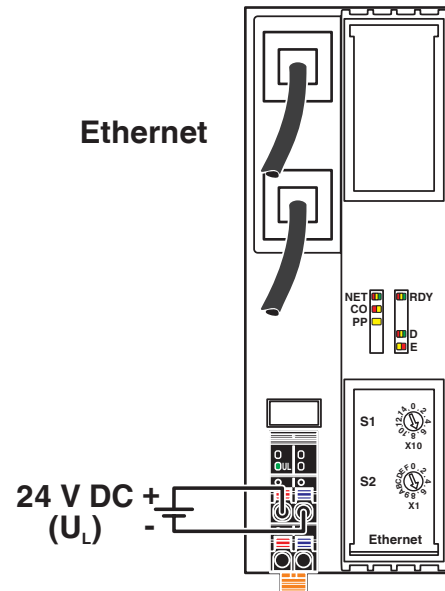


# AXL F BK ETH NET2 - Bus coupler

2702177

<https://www.phoenixcontact.com/us/products/2702177>

Block diagram

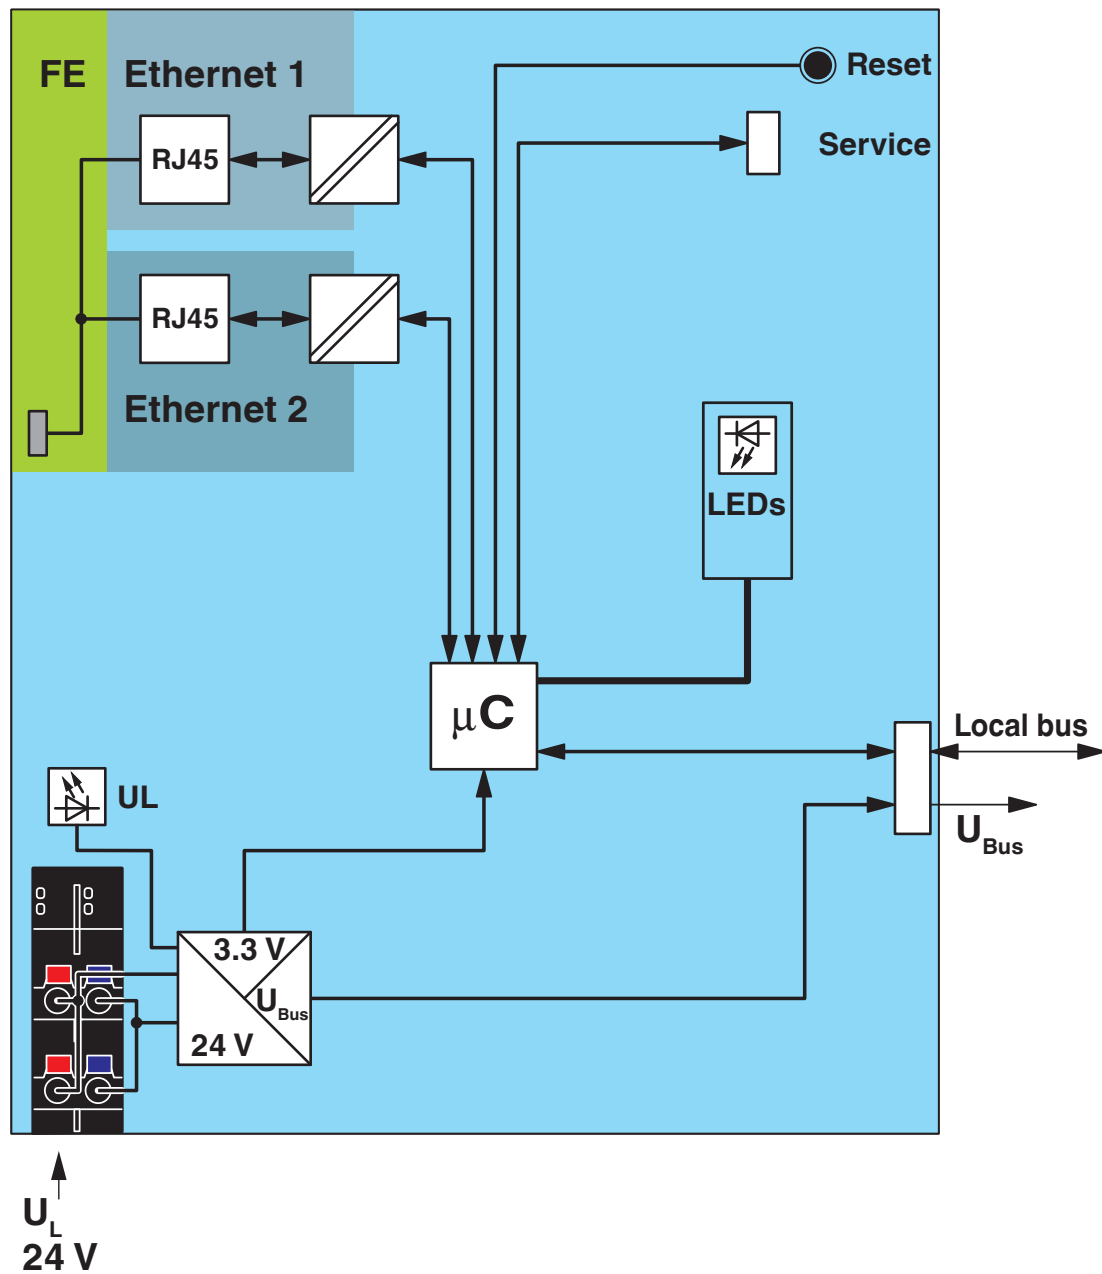

Internal wiring of the terminal points


# AXL F BK ETH NET2 - Bus coupler

2702177

<https://www.phoenixcontact.com/us/products/2702177>



Dimensional drawing

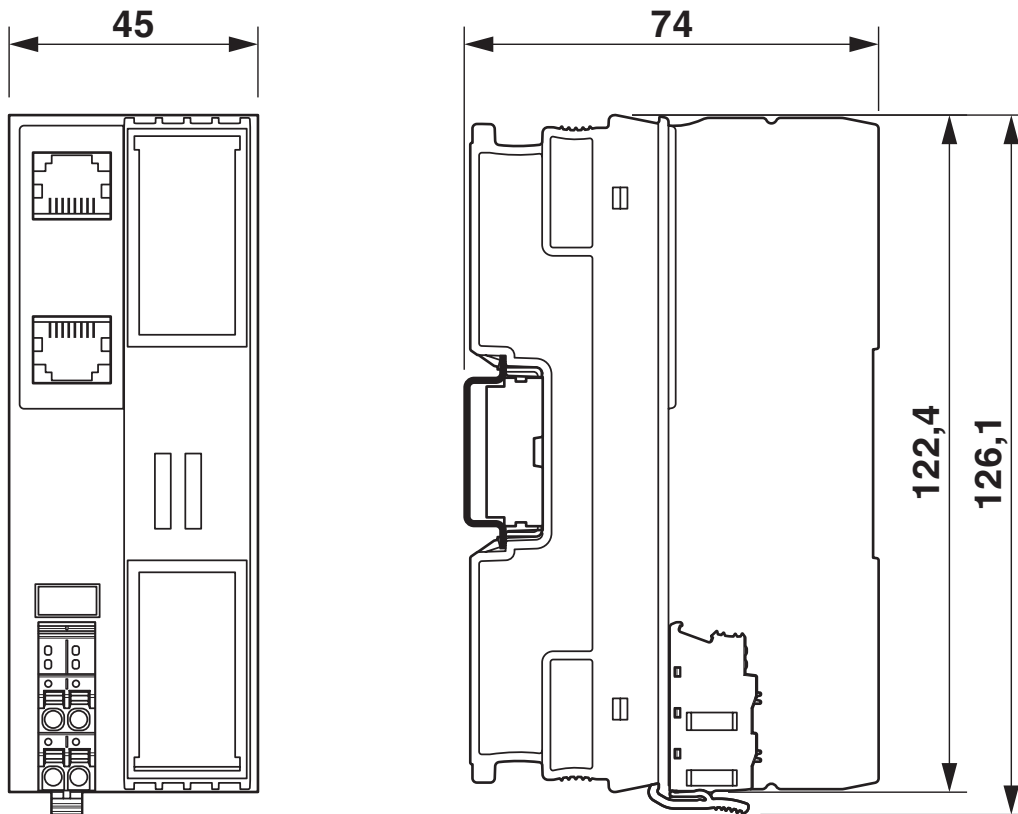

# AXL F BK ETH NET2 - Bus coupler



2702177

<https://www.phoenixcontact.com/us/products/2702177>

## Classifications

### ECLASS

ECLASS-11.0	27242608
-------------	----------

### ETIM

ETIM 8.0	EC001604
----------	----------

### UNSPSC

UNSPSC 21.0	32151600
-------------	----------



2702177

<https://www.phoenixcontact.com/us/products/2702177>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

# AXL F BK ETH NET2 - Bus coupler

2702177

<https://www.phoenixcontact.com/us/products/2702177>



## Accessories

### AXL F BS BK - Bus connector

2701422

<https://www.phoenixcontact.com/us/products/2701422>

Axioline F bus base module for housing type BK



---

### FL PLUG RJ45 GR/2 - RJ45 connector

2744856

<https://www.phoenixcontact.com/us/products/2744856>



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 1 Gbps, CAT5 (IEC 11801:2002), material: Plastic, connection method: Crimp connection, connection cross section: AWG 26- 24, cable outlet: straight, color: gray, Ethernet

# AXL F BK ETH NET2 - Bus coupler

2702177

<https://www.phoenixcontact.com/us/products/2702177>



## FL PLUG RJ45 GN/2 - RJ45 connector

2744571

<https://www.phoenixcontact.com/us/products/2744571>



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 1 Gbps, CAT5 (IEC 11801:2002), material: Plastic, connection method: Crimp connection, connection cross section: AWG 26- 24, cable outlet: straight, color: green, Ethernet

---

## FL CAT5 HEAVY - Data cable

2744814

<https://www.phoenixcontact.com/us/products/2744814>



CAT5-SF/UTP cable (J-02YS(ST)C HP 2 x 2 x 24 AWG), heavy-duty installation cable, 2 x 2 x 0.22 mm<sup>2</sup>, solid conductor, shielded, outer sheath: 7.8 mm diameter, inner sheath: 5.75 mm ± 0.15 mm diameter

# AXL F BK ETH NET2 - Bus coupler

2702177

<https://www.phoenixcontact.com/us/products/2702177>



## FL CAT5 FLEX - Installation cable

2744830

<https://www.phoenixcontact.com/us/products/2744830>



By the meter, Installation cable, Ethernet CAT5 (100 Mbps), shielded, PUR halogen-free, water blue RAL 5021, 4-wire (2x2xAWG26/7, SF/UTP), color single wire: white/orange-orange, white/green-green, cable length: Free entry (1.0 ... 1000.0 m)

---

## FL CRIMPTOOL - Assembly tool

2744869

<https://www.phoenixcontact.com/us/products/2744869>



Crimping pliers, for assembling the RJ45 plugs FL PLUG RJ45..., for assembly on site

# AXL F BK ETH NET2 - Bus coupler



2702177

<https://www.phoenixcontact.com/us/products/2702177>

## ZB 20,3 AXL UNPRINTED - Zack marker strip

0829579

<https://www.phoenixcontact.com/us/products/0829579>



Zack marker strip for Axioline F (device labeling), in 2 x 20.3 mm pitch, unprinted, 25-section, for individual labeling with B-STIFT 0.8, X-PEN, or CMS-P1-PLOTTER

---

## ZBF 10/5,8 AXL UNPRINTED - Zack Marker strip, flat

0829580

<https://www.phoenixcontact.com/us/products/0829580>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.15 mm, lettering field size: 4 x 10, 15 x 5 mm, 1 x 5.8 x 5 mm, Number of individual labels: 50

# AXL F BK ETH NET2 - Bus coupler

2702177

<https://www.phoenixcontact.com/us/products/2702177>



## EMT (35X18,7)R - Insert label

0801831

<https://www.phoenixcontact.com/us/products/0801831>



Insert label, for marking Phoenix Contact Axioline modules, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: insert, lettering field size: 35 x 18.7 mm, Number of individual labels: 500

---

## CAB-USB A/MICRO USB B/2,0M - Connecting cable

2701626

<https://www.phoenixcontact.com/us/products/2701626>



Connecting cable, for connecting the controller to a PC for PC Worx and LOGIC+, USB A to micro USB B, 2 m in length.

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)