

GW PL DIO4-BUS - Protocol converter



2702237

<https://www.phoenixcontact.com/us/products/2702237>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Four-channel digital input and four-channel digital output module with screw connection. For use with Modbus and OPC UA protocols.

Commercial data

Item number	2702237
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN11
Product key	DNC322
Catalog page	Page 463 (C-6-2019)
GTIN	4055626067087
Weight per piece (including packing)	340 g
Weight per piece (excluding packing)	325 g
Customs tariff number	85176200
Country of origin	DE


GW PL DIO4-BUS - Protocol converter



2702237
<https://www.phoenixcontact.com/us/products/2702237>

Technical data

Dimensions

Dimensional drawing	
Width	22.5 mm
Height	99 mm
Depth	114.5 mm

Notes

Note on application	
Note on application	Only for industrial use
Utilization restriction	
CCCex note	Use in potentially explosive areas is not permitted in China.

Material specifications

Color	gray
-------	------

Interfaces

Data: Digital inputs	
Connection method	Screw connection
No. of channels	4

Input data

Voltage input signal	0 V ... 30 V
Switching level "0" signal	0 V DC ... 5 V DC
Switching level "1" signal	15 V DC ... 30 V DC

Output data

Switching	
Output name	Digital output
Number of outputs	4
Maximum switching voltage	30 V DC
Max. switching current	500 mA

Product properties

Product type	I/O component
MTBF	406 Years (Siemens model SN29500, temperature 40°C, env.)

GW PL DIO4-BUS - Protocol converter



2702237

<https://www.phoenixcontact.com/us/products/2702237>

factor 1.5 and stress factor 50%)

Data management status

Article revision	05
------------------	----

Electrical properties

Test voltage data interface/power supply	500 V AC
--	----------

Test voltage data interfaces	500 V AC
------------------------------	----------

Supply

Supply voltage range	19.2 V DC ... 30 V DC (supplied from the bus)
----------------------	---

Typical current consumption	15 mA (at 24 V DC)
-----------------------------	--------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
----------------------	------

Ambient temperature (operation)	-40 °C ... 70 °C
---------------------------------	------------------

	-40 °F ... 158 °F
--	-------------------

Ambient temperature (storage/transport)	-40 °C ... 85 °C
---	------------------

Approvals

Conformity/Approvals

Conformance	CE-compliant
-------------	--------------

Noxious gas test	ISA-S71.04-1985 G3 Harsh Group A
------------------	----------------------------------

Ex data

ATEX	Ⓔ II 3 G Ex nA IIC T4 Gc DEMKO 17 ATEX 1749X
------	--

IECEX	IECEX ULD 17.0020X Ex nA IIC T4 Gc
-------	------------------------------------

UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D
------------------	------------------------------------

Mounting


Mounting type	DIN rail mounting
---------------	-------------------

Assembly note	on standard DIN rail NS 35 in accordance with EN 60715
---------------	--

Mounting position	any
-------------------	-----

Drawings

Block diagram

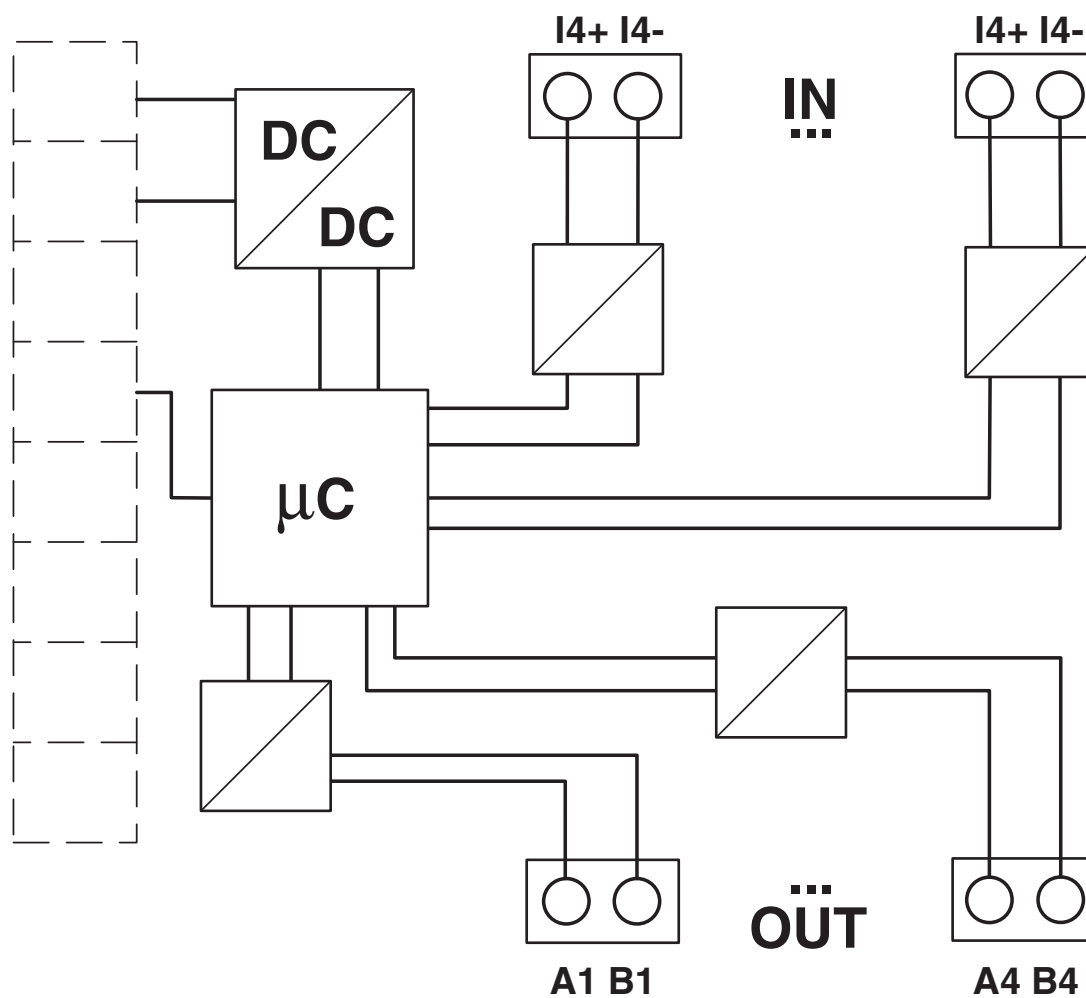


GW PL DIO4-BUS - Protocol converter

2702237

<https://www.phoenixcontact.com/us/products/2702237>



Dimensional drawing

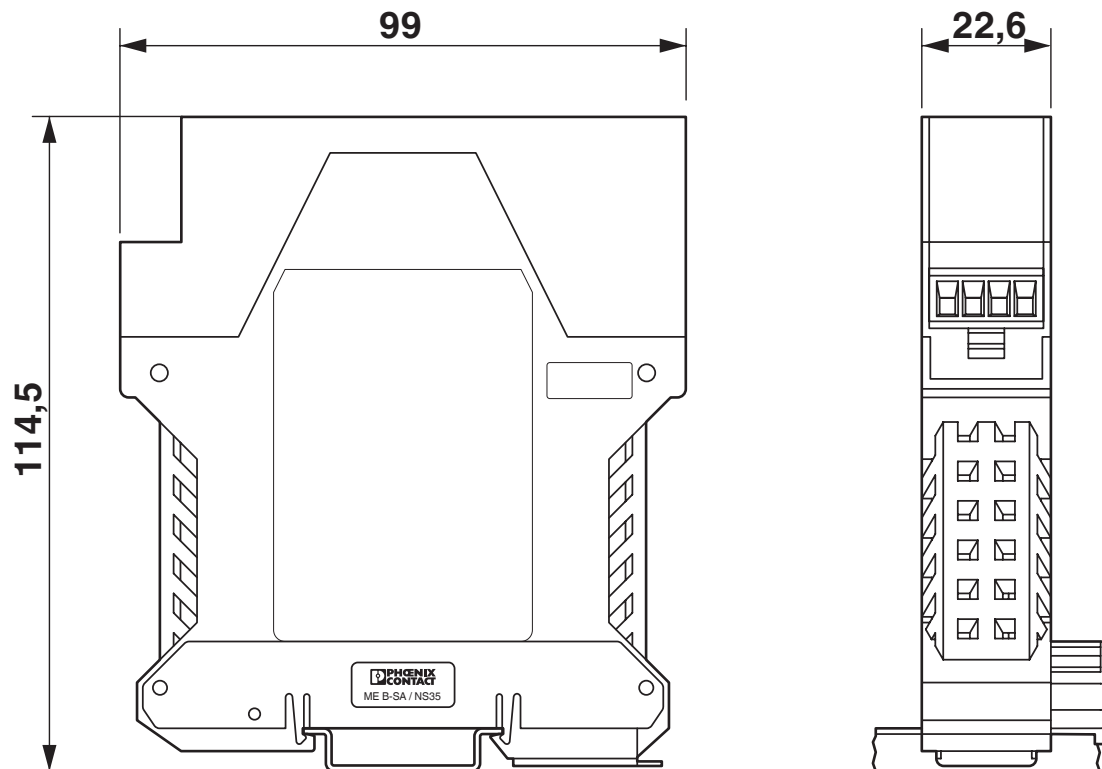

GW PL DIO4-BUS - Protocol converter



2702237

<https://www.phoenixcontact.com/us/products/2702237>

Classifications

ECLASS

ECLASS-11.0	27242208
ECLASS-12.0	27242208
ECLASS-13.0	27242208

ETIM

ETIM 9.0	EC001423
----------	----------

UNSPSC

UNSPSC 21.0	32151700
-------------	----------

GW PL DIO4-BUS - Protocol converter



2702237

<https://www.phoenixcontact.com/us/products/2702237>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

GW PL DIO4-BUS - Protocol converter



2702237

<https://www.phoenixcontact.com/us/products/2702237>

Mandatory accessories

GW PL ETH/UNI-BUS - Ethernet HART multiplexer

2702233

<https://www.phoenixcontact.com/us/products/2702233>



Ethernet head station for modular HART gateway. Connect up to five GW PL HART...-BUS expansion modules to communicate with up to 40 HART devices. Supports Modbus TCP, OPC UA, PROFINET, HART IP, FDT/DTM and Arcom.

GW PL ETH/BASIC-BUS - Ethernet HART multiplexer

2702321

<https://www.phoenixcontact.com/us/products/2702321>



Ethernet head station for modular HART gateway. Connect up to five GW PL HART...-BUS expansion modules to communicate with up to 40 HART devices. Supports Modbus TCP, HART IP, FDT/DTM and Arcom.

Accessories

GW PL DIO4-BUS - Protocol converter

2702237

<https://www.phoenixcontact.com/us/products/2702237>



GW PL HART4-BUS - Protocol converter

2702234

<https://www.phoenixcontact.com/us/products/2702234>

Four-channel HART® expansion module, with screw connection



GW PL HART8-BUS - Protocol converter

2702235

<https://www.phoenixcontact.com/us/products/2702235>

Eight-channel HART® expansion module, with screw connection



GW PL DIO4-BUS - Protocol converter

2702237

<https://www.phoenixcontact.com/us/products/2702237>



GW PL HART8+AI-BUS - Protocol converter

2702236

<https://www.phoenixcontact.com/us/products/2702236>



Eight-channel HART® expansion module with analog loop supply and screw connection

GW PL ETH/UNI-BUS - Ethernet HART multiplexer

2702233

<https://www.phoenixcontact.com/us/products/2702233>



Ethernet head station for modular HART gateway. Connect up to five GW PL HART...-BUS expansion modules to communicate with up to 40 HART devices. Supports Modbus TCP, OPC UA, PROFINET, HART IP, FDT/DTM and Arcom.

GW PL DIO4-BUS - Protocol converter

2702237

<https://www.phoenixcontact.com/us/products/2702237>



GW PL ETH/BASIC-BUS - Ethernet HART multiplexer

2702321

<https://www.phoenixcontact.com/us/products/2702321>



Ethernet head station for modular HART gateway. Connect up to five GW PL HART...-BUS expansion modules to communicate with up to 40 HART devices. Supports Modbus TCP, HART IP, FDT/DTM and Arcom.

GW PL HART4-R-BUS - Protocol converter

2702879

<https://www.phoenixcontact.com/us/products/2702879>



Four-channel HART® expansion module, with screw connection, with 250 Ω internal input resistors

GW PL DIO4-BUS - Protocol converter

2702237

<https://www.phoenixcontact.com/us/products/2702237>



GW PL HART8-R-BUS - Protocol converter

2702880

<https://www.phoenixcontact.com/us/products/2702880>



Eight-channel HART® expansion module, with screw connection, with 250 Ω internal input resistors

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com