

# PSR-MC37-3NO-1NC-24DC-SC - Safety relays



2702411

<https://www.phoenixcontact.com/us/products/2702411>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency switching off and safety doors as well as for elevator applications up to SIL 3, Cat. 4, PL e, 1 or 2-channel operation, automatic or manual start, cross-circuit detection, 3 enabling current paths,  $U_S = 24\text{ V DC}$ , plug-in screw terminal block

## Your advantages

- Low housing width of only 22.5mm
- 3 enabling current paths, 1 signaling current path, 1 digital signal output
- Cross-circuit detection
- Automatic and manual activation
- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061
- Suitable for elevator applications in accordance with EN 81-20

## Commercial data

Item number	2702411
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN01
Product key	DNA181
Catalog page	Page 222 (C-6-2019)
GTIN	4055626276960
Weight per piece (including packing)	228 g
Weight per piece (excluding packing)	183.88 g
Customs tariff number	85371098
Country of origin	DE

# PSR-MC37-3NO-1NC-24DC-SC - Safety relays



2702411

<https://www.phoenixcontact.com/us/products/2702411>

## Technical data

### Notes

#### Note on application

Note on application	Only for industrial use
---------------------	-------------------------

### Product properties

Product type	Safety relays
Product family	PSRmini
Application	Emergency stop
	Safety door
	Solenoid switch
	Transponder
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

#### Data management status

Article revision	01
------------------	----

#### Times

Typical response time	< 100 ms (automatic start)
Typ. starting time with $U_S$	< 100 ms (when controlled via A1)
Typical release time	< 20 ms (when controlled via A1 or S12 and S22.)
Restart time	< 1 s (Boot time)
Recovery time	< 500 ms

### Electrical properties

Maximum power dissipation for nominal condition	17.03 W ( $U_B = 30 \text{ V}$ , $U_S = 24 \text{ V}$ , $I_S = 70 \text{ mA}$ , $I_L^2 = 72 \text{ A}^2$ , $R_{\text{Contact}} = 0.2 \text{ } \Omega_{\text{IEC}}$ )
Nominal operating mode	100% operating factor

#### Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V AC
	250 V AC
Rated surge voltage/insulation	Basic insulation 4 kV between all current paths
	Basic insulation 4 kV between all current paths and housing

#### Supply

Designation	A1/A2
Rated control circuit supply voltage $U_S$	19.2 V DC ... 30 V DC
Rated control circuit supply voltage $U_S$	24 V DC -20 % / +25 %
Rated control supply current $I_S$	typ. 70 mA
Power consumption at $U_S$	typ. 1.68 W
Inrush current	2 A ( $\Delta t = 300 \text{ } \mu\text{s}$ at $U_S$ )
Protective circuit	Serial protection against polarity reversal; Suppressor diode

# PSR-MC37-3NO-1NC-24DC-SC - Safety relays



2702411

<https://www.phoenixcontact.com/us/products/2702411>

## Input data

Digital: Sensor circuit (S12, S22)

Description of the input	safety-related sensor inputs
Number of inputs	2
Input voltage range "0" signal	< 5 V (S12) 0 V DC ... 5 V DC (S22)
Input current range "0" signal	< 2 mA (S12) 0 mA ... 2 mA (S22)
Inrush current	< 5 mA () < 5 mA (typ. with $U_S$ at S22/24 V, $\Delta t = 500 \mu s$ ) > -5 mA (typ. with $U_S$ at S22/0 V, $\Delta t = 500 \mu s$ )
Filter time	max. 3 ms (at S12, S22; test pulse width; blanking pulses/dark test) > 1 s (at S12, S22; test pulse rate; blanking pulses/dark test) Where test pulse width $\leq 1$ ms: test pulse rate = 5 x test pulse width max. 1 ms (at S12, S22; test pulse width; switch-on pulses/light test) > 100 ms (at S12, S22; test pulse rate; switch-on pulses/light test) Unless test pulses are safety-related, they should be disabled.
Max. permissible overall conductor resistance	150 $\Omega$
Protective circuit	Suppressor diode
Current consumption	< 4 mA (typ. with $U_S$ at S12) < 4 mA (typ. with $U_S$ at S22/24 V) > -15 mA (typ. with $U_S$ at S22/0 V)

Digital: Start circuit (S35)

Description of the input	non-safety-related NPN
Number of inputs	1
Input voltage range "1" signal	19.2 V DC ... 30 V DC
Inrush current	< 10 mA (typ. with $U_S$ , $\Delta t = 500 \mu s$ )
Max. permissible overall conductor resistance	150 $\Omega$
Protective circuit	Suppressor diode
Current consumption	< 0.5 mA (typ. with $U_S$ )

## Output data

Relay: Enabling current path (13/14, 23/24, 33/34)

Output description	safety-related N/O contacts
Number of outputs	3 (undelayed)
Contact switching type	3 enabling current paths
Contact material	AgSnO <sub>2</sub>
Switching voltage	min. 5 V AC/DC

# PSR-MC37-3NO-1NC-24DC-SC - Safety relays



2702411

<https://www.phoenixcontact.com/us/products/2702411>

	max. 250 V AC/DC
Switching capacity	min. 50 mW
Inrush current	min. 10 mA
	max. 6 A
Switching capacity in accordance with IEC 60947-5-1	5 A (24 V (DC13))
	5 A (250 V (AC15))
Limiting continuous current	6 A
Sq. Total current	72 A <sup>2</sup> (observe derating)
Switching frequency	0.5 Hz
Mechanical service life	10x 10 <sup>6</sup> cycles
Output fuse	6 A gL/gG (N/O contact)

## Relay: Signaling current path (41/42)

Output description	non-safety-related N/C contact
Number of outputs	1 (undelayed)
Contact switching type	1 signaling current path
Contact material	AgSnO <sub>2</sub>
Switching voltage	min. 5 V AC/DC
	max. 250 V AC/DC
Switching capacity	min. 50 mW
Inrush current	min. 10 mA
	max. 6 A ( $\Delta t = 100$ ms)
Limiting continuous current	1 A
Sq. Total current	1 A <sup>2</sup>
Switching frequency	0.5 Hz
Mechanical service life	10x 10 <sup>6</sup> cycles
Output fuse	1 A gL/gG

## Signal: Y32

Output description	non-safety-related
	PNP
Number of outputs	1 (digital)
Voltage	23 V DC ( $U_s - 1$ V)
Current	max. 100 mA
Maximum inrush current	1 A ( $\Delta t = 5$ ms at $U_s$ )
Short-circuit protection	Yes

## Connection data

### Connection technology

pluggable	yes
-----------	-----

### Conductor connection

Connection method	Screw connection
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>

# PSR-MC37-3NO-1NC-24DC-SC - Safety relays



2702411

<https://www.phoenixcontact.com/us/products/2702411>

Conductor cross-section AWG	24 ... 12
Stripping length	7 mm
Screw thread	M3
Tightening torque	0.5 Nm ... 0.6 Nm

## Signaling

Status display	3 x LED (green)
Operating voltage display	1 x green LED

## Dimensions

Width	22.5 mm
Height	112.2 mm
Depth	114.5 mm

## Material specifications

Color (Housing)	yellow (RAL 1018)
Housing material	Polyamide

## Characteristics

### Safety data

Stop category	0
---------------	---

### Safety data: EN ISO 13849

Category	4
Performance level (PL)	e (5 A DC13; 5 A AC15; 8760 switching cycles/year)

### Safety data: IEC 61508 - High demand

Safety Integrity Level (SIL)	3
------------------------------	---

### Safety data: IEC 61508 - Low demand

Safety Integrity Level (SIL)	3
------------------------------	---

### Safety data: EN IEC 62061

Safety Integrity Level (SIL)	3
------------------------------	---

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-40 °C ... 60 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g for $\Delta t = 11$ ms (continuous shock: 10g for $\Delta t = 16$ ms)

# PSR-MC37-3NO-1NC-24DC-SC - Safety relays



2702411

<https://www.phoenixcontact.com/us/products/2702411>

Vibration (operation)	10 Hz ... 150 Hz, amplitude 0.15 mm, 2g
-----------------------	---

## Approvals

CE	
Identification	CE-compliant

## Standards and regulations

Air clearances and creepage distances between the power circuits	
Standards/regulations	DIN EN 60664-1

## Mounting

Mounting type	DIN rail mounting
Assembly note	See derating curve
Mounting position	vertical or horizontal

# PSR-MC37-3NO-1NC-24DC-SC - Safety relays




2702411

<https://www.phoenixcontact.com/us/products/2702411>

## Drawings

Block diagram

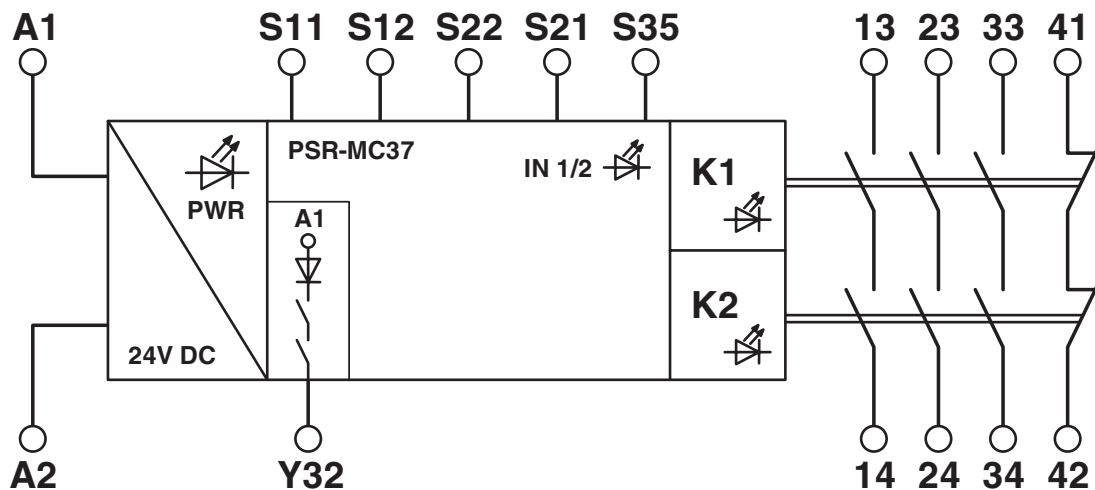

Block diagram



# PSR-MC37-3NO-1NC-24DC-SC - Safety relays



2702411

<https://www.phoenixcontact.com/us/products/2702411>

Circuit diagram

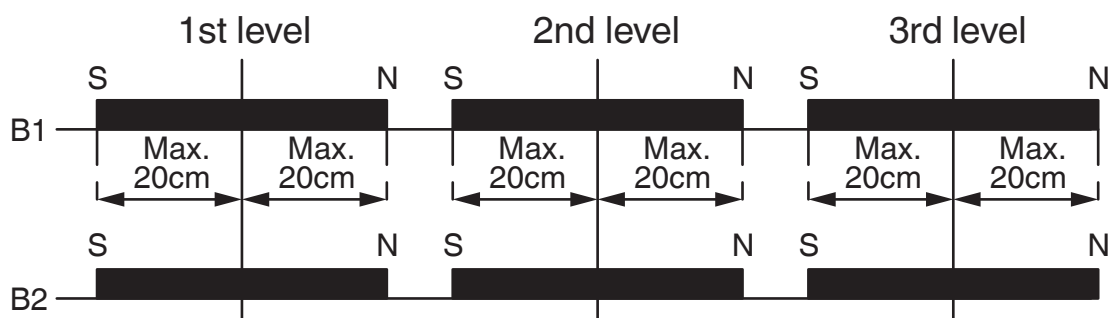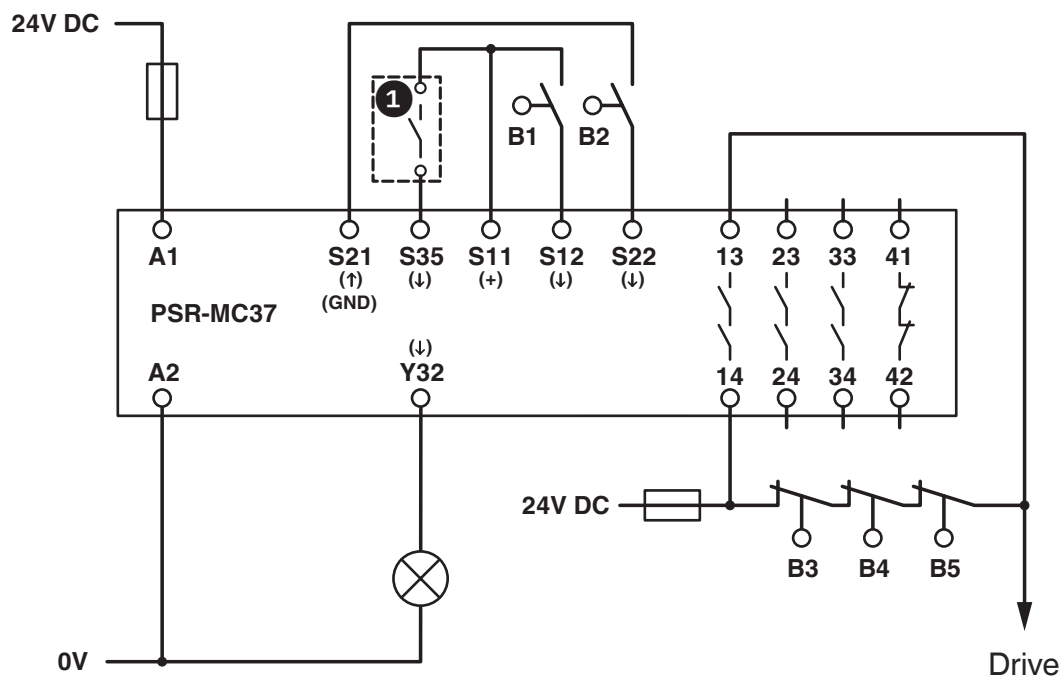



# PSR-MC37-3NO-1NC-24DC-SC - Safety relays




2702411


<https://www.phoenixcontact.com/us/products/2702411>

## Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2702411>




**UL Listed**  
Approval ID: E140324



**cUL Listed**  
Approval ID: E140324



**Functional Safety**  
Approval ID: 44-208-15124305



**Functional Safety**  
Approval ID: 44-786-161627

**cULus Listed**

# PSR-MC37-3NO-1NC-24DC-SC - Safety relays



2702411

<https://www.phoenixcontact.com/us/products/2702411>

## Classifications

### ECLASS

ECLASS-11.0	27371819
ECLASS-12.0	27371819
ECLASS-13.0	27371819

### ETIM

ETIM 9.0	EC001449
----------	----------

### UNSPSC

UNSPSC 21.0	39122200
-------------	----------

# PSR-MC37-3NO-1NC-24DC-SC - Safety relays



2702411

<https://www.phoenixcontact.com/us/products/2702411>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	c6ec8599-d6d5-4a78-919b-15dc2622b818

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)