

UEGM 40/2 BK OHNE LOGO - Electronics housing



2792468

<https://www.phoenixcontact.com/us/products/2792468>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Electronic housing, fully equipped with 6 screw connections per side for two PCBs

Commercial data

Item number	2792468
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	AC11
Product key	ACHCCB
GTIN	4017918242053
Weight per piece (including packing)	79.94 g
Weight per piece (excluding packing)	68.956 g
Customs tariff number	85369010
Country of origin	DE

UEGM 40/2 BK OHNE LOGO - Electronics housing



2792468


<https://www.phoenixcontact.com/us/products/2792468>

Technical data

Product properties

Housing type	Component housing
Type	Connection system integrated, housing closed
Number of positions	12
Type	Complete housing

Dimensions

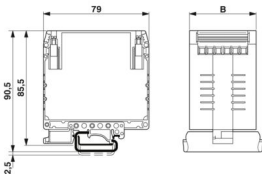Dimensional drawing	
Width	40 mm
Length	79 mm

Material specifications

Color	black
Flammability rating according to UL 94	V2
Housing material	Polyamide (PA 6.6)

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 105 °C
---------------------------------	-------------------

UEGM 40/2 BK OHNE LOGO - Electronics housing


2792468

<https://www.phoenixcontact.com/us/products/2792468>




Drawings


Dimensional drawing

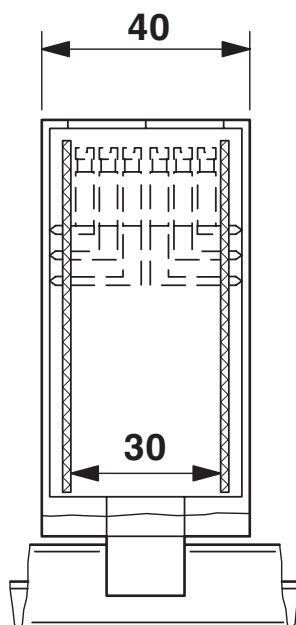


Exploded view

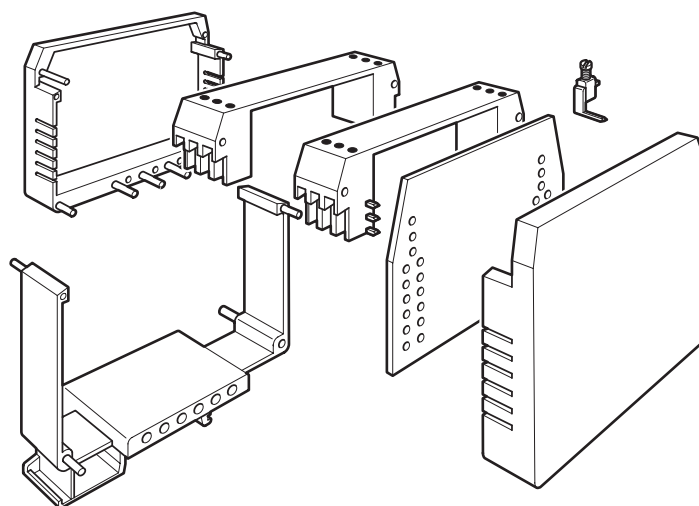

Dimensional drawing

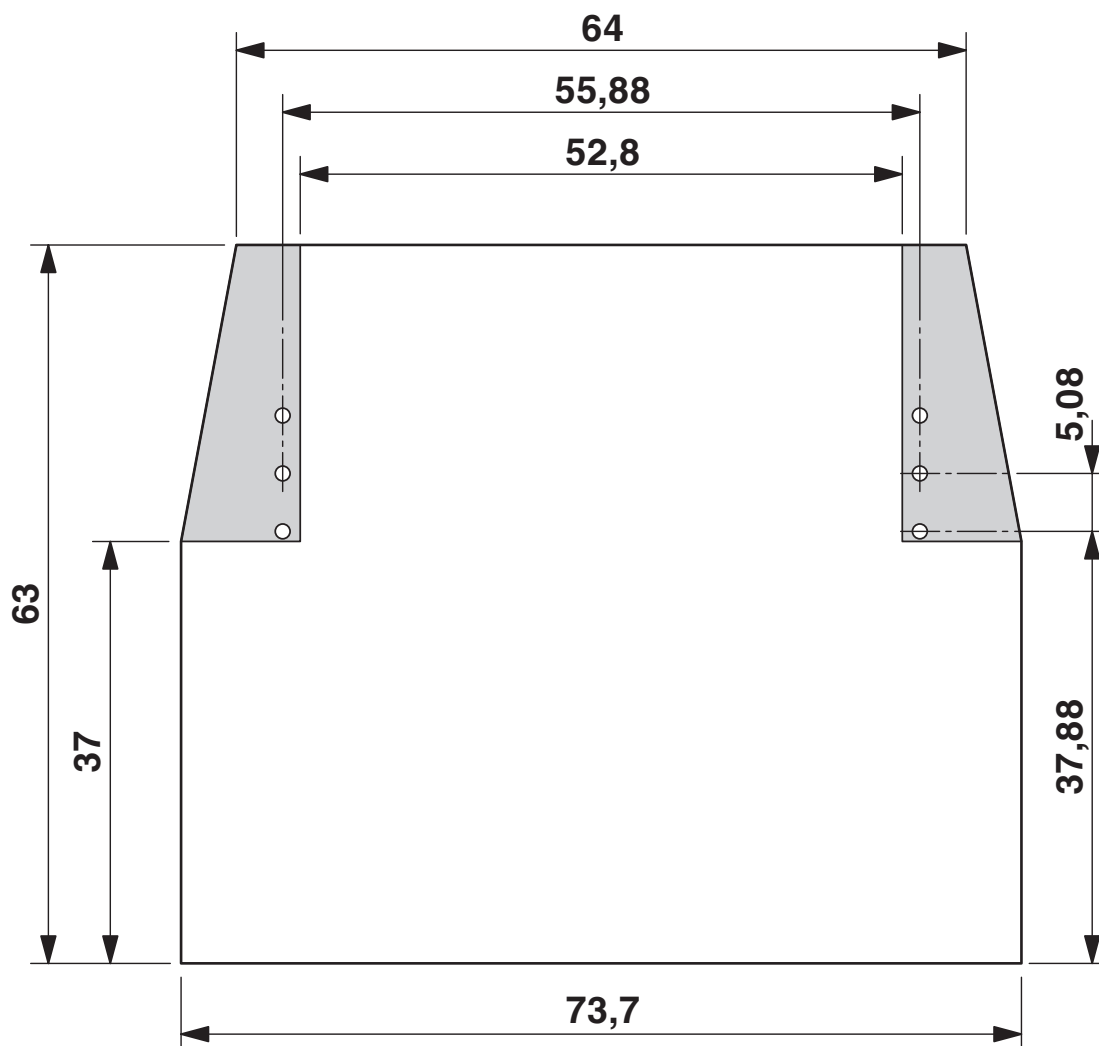


Dimensional drawing

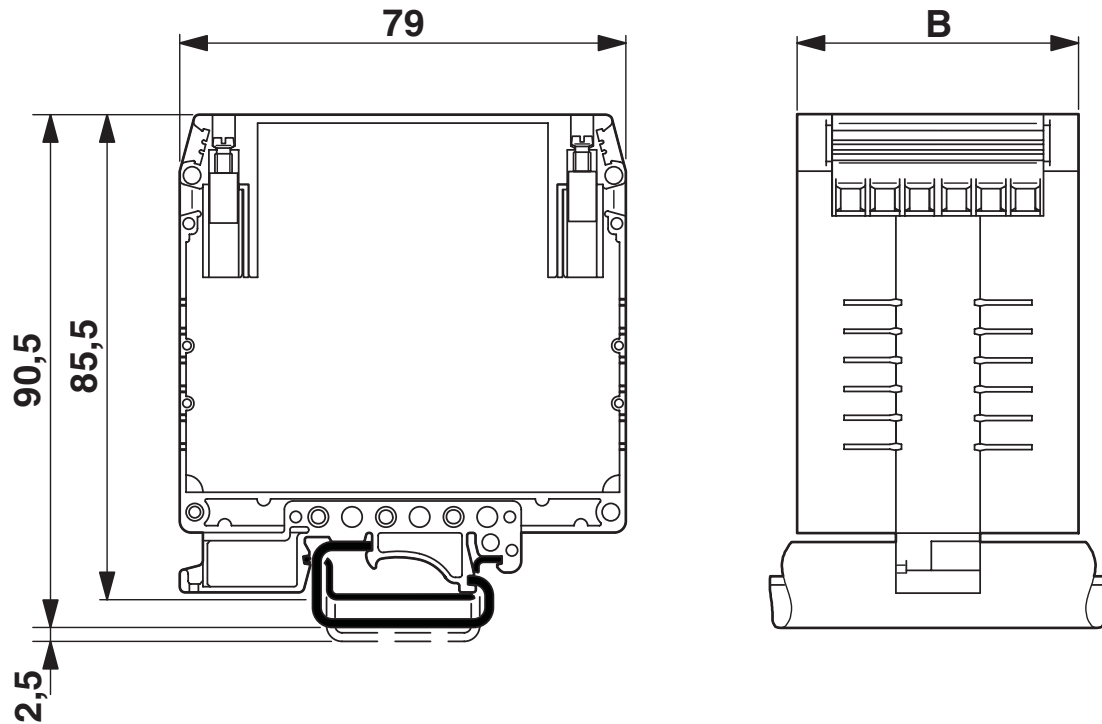

2792468

<https://www.phoenixcontact.com/us/products/2792468>

Schematic diagram

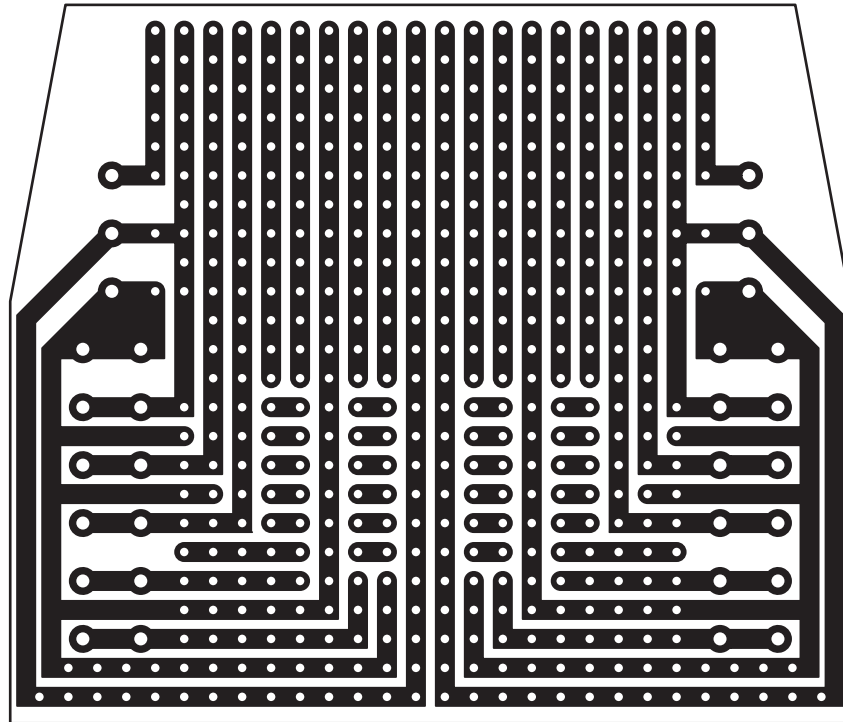

UEGM 40/2 BK OHNE LOGO - Electronics housing



2792468

<https://www.phoenixcontact.com/us/products/2792468>

Classifications

ECLASS

ECLASS-11.0	27182702
-------------	----------

ETIM

ETIM 8.0	EC001031
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

2792468

<https://www.phoenixcontact.com/us/products/2792468>

Accessories

DB 50- 90 BK - Wire bridge

2820916

<https://www.phoenixcontact.com/us/products/2820916>

Flexible wire loop bridge, 50-pos., conductor cross-section: 0.5 mm^2 , loop length: 90 mm, ferrule length: 8 mm, color: black



DB 50- 90 GY - Wire bridge

2820929

<https://www.phoenixcontact.com/us/products/2820929>

Flexible wire loop bridge, 50-pos., conductor cross-section: 0.5 mm^2 , loop length: 90 mm, ferrule length: 8 mm, color: gray



UEGM 40/2 BK OHNE LOGO - Electronics housing

2792468

<https://www.phoenixcontact.com/us/products/2792468>




P 1-UEGM - PCB

2792109

<https://www.phoenixcontact.com/us/products/2792109>

PCB, for screw and slip-on connection, for custom fitting electronic components.



UEG-MT-FS - Components of electronic housing

2790389

<https://www.phoenixcontact.com/us/products/2790389>

Metal part for slip-on connection, to increase the number of positions.



2792468

<https://www.phoenixcontact.com/us/products/2792468>

PT/FS 6,3 - Insulating sleeve

0604707

<https://www.phoenixcontact.com/us/products/0604707>



Insulating sleeve, as touch protection, slide onto the conductor before for 6.3 slip-on sleeves

PT/FS 2,8 - Insulating sleeve

1406700

<https://www.phoenixcontact.com/us/products/1406700>



Insulating sleeve, as touch protection, slide onto the conductor before for 2.8 slip-on sleeves

UEGM 40/2 BK OHNE LOGO - Electronics housing



2792468

<https://www.phoenixcontact.com/us/products/2792468>

ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/us/products/1050004>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com