

MCR-T-UI-NC - Temperature measuring transducer



2814100

<https://www.phoenixcontact.com/us/products/2814100>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



MCR-T module, programmable temperature transducer, unconfigured, for thermocouple sensors and resistance temperature detectors, in 2-, 3- or 4-conductor technology

Your advantages

- Freely programmable via MCR/PI-CONF-WIN
- With transistor switching output
- Inverse output signal ranges as an option
- For resistance thermometers and thermocouples
- Measure differential temperatures

Commercial data

Item number	2814100
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	C401
Product key	CK1821
Catalog page	Page 136 (C-7-2013)
GTIN	4017918139421
Weight per piece (including packing)	140.5 g
Weight per piece (excluding packing)	118.5 g
Customs tariff number	85437090
Country of origin	DE

MCR-T-UI-NC - Temperature measuring transducer



2814100

<https://www.phoenixcontact.com/us/products/2814100>

Technical data

Product properties

Product type	Temperature transmitter
--------------	-------------------------

Electrical properties

Typical cold point errors	1.5 K
Cold point error, max.	≤ 3 K
Maximum power dissipation for nominal condition	1.52 W
Test voltage input/output	1 kV AC (50 Hz, 60 s)
Test voltage input/power supply	1 kV AC (50 Hz, 60 s)
Maximum temperature coefficient	≤ 0.01 %/K
Temperature coefficient, typical	0.005 %/K
Maximum transmission error	≤ 0.1 % (of maximum range, ±6 mV or ±12 µA at output)

Supply

Supply voltage range	18 V DC ... 30 V DC
Typical current consumption	40 mA
Max. current consumption	≤ 60 mA

Input data

Signal

Input signal	Temperature
--------------	-------------

Measurement

Configurable/programmable	Yes, unconfigured
Sensor types (RTD) that can be used	Pt, Ni, Cu sensors
Sensor types that can be used (TC)	U, T, L, J, E, K, N, S, R, B, C, W, HK
Temperature measuring range	Depending on sensor type used
Temperature measuring range	min. 20 K (RTD, excluding CU10 - 100 K)
Temperature measuring range	min. 50 K (TC, except type B 100 K)
Sensor type:	-200 °C ... 850 °C (freely adjustable)
	-60 °C ... 180 °C (freely adjustable)
	-70 °C ... 500 °C (freely adjustable)
	-50 °C ... 160 °C (freely adjustable)
	-50 °C ... 200 °C (freely adjustable)
	-50 °C ... 180 °C (freely adjustable)
	-55 °C ... 150 °C (freely adjustable)
	-200 °C ... 600 °C (freely adjustable)
	-200 °C ... 400 °C (freely adjustable)
	-200 °C ... 900 °C (freely adjustable)
	-210 °C ... 1200 °C (freely adjustable)
	-226 °C ... 1000 °C (freely adjustable)
	-200 °C ... 1372 °C (freely adjustable)

MCR-T-UI-NC - Temperature measuring transducer



2814100

<https://www.phoenixcontact.com/us/products/2814100>

	-200 °C ... 1300 °C (freely adjustable)
	-50 °C ... 1760 °C (freely adjustable)
	-50 °C ... 1760 °C (freely adjustable)
	500 °C ... 1820 °C (freely adjustable)
	-18 °C ... 2316 °C (freely adjustable)
	-18 °C ... 2316 °C (freely adjustable)
	-200 °C ... 800 °C (freely adjustable)
	-200 °C ... 850 °C (freely adjustable)
	-200 °C ... 850 °C (freely adjustable)
	-200 °C ... 850 °C (freely adjustable)
	-200 °C ... 850 °C (freely adjustable)
	-60 °C ... 180 °C (freely adjustable)
	-60 °C ... 180 °C (freely adjustable)
	-60 °C ... 180 °C (freely adjustable)
	-60 °C ... 180 °C (freely adjustable)
Sensor input current	250 µA (Resistance thermometer)
Linear resistance measuring range	0 Ω ... 8000 Ω (freely adjustable, min. measuring range 100 Ω)
Linear mV signal range	-20 mV ... 2400 mV (freely adjustable, minimum measuring range span of 10 mV)
Connection technology	2-, 3-, 4-conductor
Connection method	Pluggable screw connection
Protective circuit	Transient protection
	Surge protection 30 V DC

Output data

Frequency:

Configurable/programmable	no
---------------------------	----

Switching: Transistor

Output description	Can carry a load of 100 mA, switches supply voltage (not protected against short-circuit); locked in case of order-specific configuration, otherwise freely programmable through MCR/PI-CONF-WIN
Continuous load current	100 mA
Output voltage range	18 V DC ... 30 V DC (switches supply voltage, not short-circuit resistant)

Signal: Voltage output / current output

Configurable/programmable	Yes, unconfigured
Voltage output signal	0 V ... 10 V
	0 V ... 5 V
	-5 V ... 5 V
	-10 V ... 10 V
	10 V ... 0 V
	5 V ... 0 V
	10 V ... -10 V

MCR-T-UI-NC - Temperature measuring transducer




2814100
<https://www.phoenixcontact.com/us/products/2814100>

	5 V ... -5 V
	1 V ... 5 V
Max. voltage output signal	± 12 V
Current output signal	0 mA ... 20 mA
	4 mA ... 20 mA
	20 mA ... 0 mA
	20 mA ... 4 mA
Max. current output signal	24 mA
Output voltage range with wire break	-12 V ... 12 V
Output voltage range with overrange/underrange	-12 V ... 12 V
Output current range with wire break	0 A ... 24 mA
Output current range with overrange/underrange	0 A ... 24 mA
Load/output load voltage output	≥ 10 kΩ
Load/output load current output	≤ 500 Ω
Ripple	< 20 mV _{PP}
Protective circuit	Transient protection
D/A converter resolution	± 12 bit

Connection data

Connection method	Pluggable screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm² ... 2.5 mm²
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
Conductor cross section AWG	24 ... 14

Dimensions

Dimensional drawing	
Width	17.5 mm
Height	99 mm
Depth	114.5 mm

Material specifications

Color	green (RAL 6021)
Housing material	Polyamide PA non-reinforced

Environmental and real-life conditions

Ambient conditions

MCR-T-UI-NC - Temperature measuring transducer



2814100

<https://www.phoenixcontact.com/us/products/2814100>

Ambient temperature (operation)	-20 °C ... 65 °C
---------------------------------	------------------

Approvals

CE

Certificate	CE-compliant
-------------	--------------

UL, USA/Canada

Identification	Class I, Div. 2, Groups A, B, C, D or Non-Hazardous Locations
----------------	---

GL


Identification	DNV GL
----------------	--------

Mounting

Mounting type	DIN rail mounting
Mounting position	any

Drawings

Circuit diagram

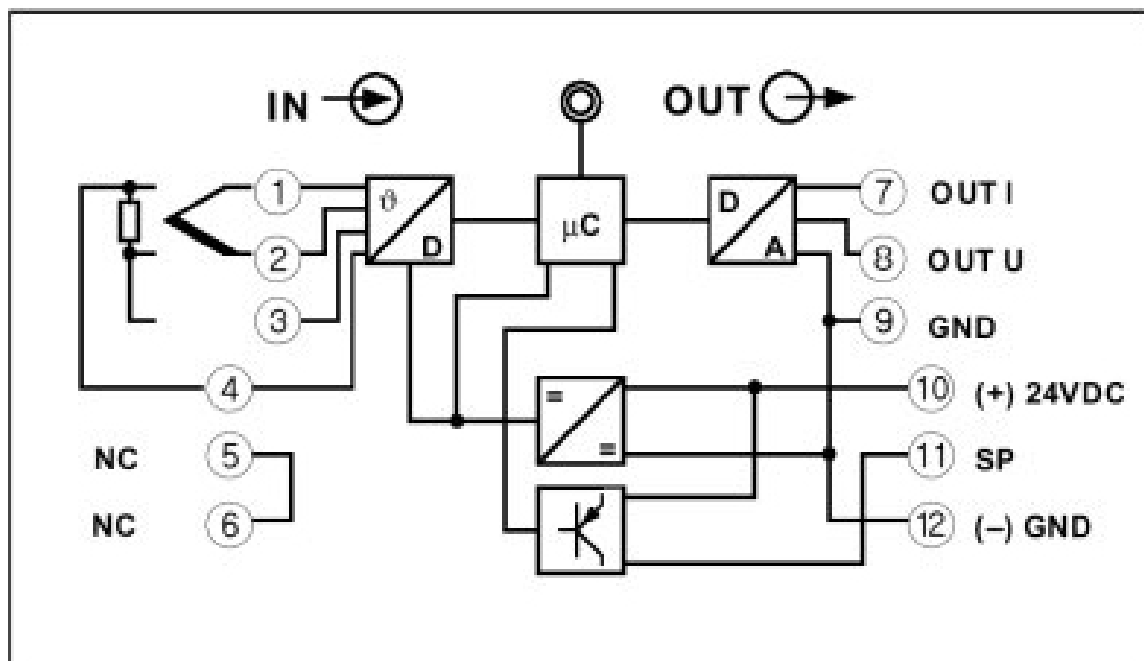


MCR-T-UI-NC - Temperature measuring transducer

2814100

<https://www.phoenixcontact.com/us/products/2814100>



Dimensional drawing

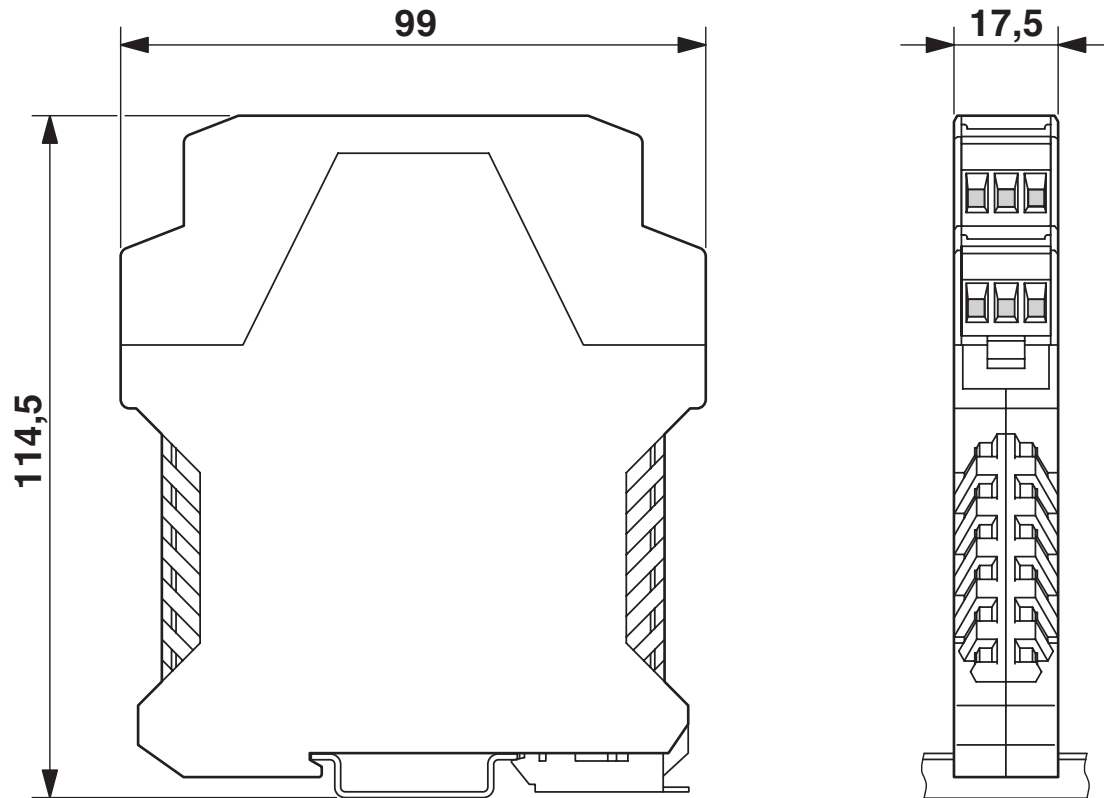

MCR-T-UI-NC - Temperature measuring transducer



2814100

<https://www.phoenixcontact.com/us/products/2814100>

Classifications

ECLASS

ECLASS-11.0	27210129
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Hexahydromethylphthalic anhydride(CAS: n/a)
	Lead(CAS: 7439-92-1)

MCR-T-UI-NC - Temperature measuring transducer



2814100

<https://www.phoenixcontact.com/us/products/2814100>

Accessories

MCR-TTL-RS232-E - Adapter cable

2814388

<https://www.phoenixcontact.com/us/products/2814388>

Software adapter cable (Stereo jack connector/D-SUB 25-pos.), 1.2 m length, for programming MCR-T-..., MCR-S-... and MCR-f-... modules



CM-KBL-RS232/USB - Cable

2881078

<https://www.phoenixcontact.com/us/products/2881078>

Connecting cable D-9-SUB to USB, with adapter D-9-SUB to D-25-SUB.



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com