

IB IL 230 DI 1-PAC - Inline terminal

2861548

<https://www.phoenixcontact.com/us/products/2861548>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Inline, Digital input terminal, Digital inputs: 1, 230 V AC, connection technology: 3-conductor, transmission speed in the local bus: 500 kbps, degree of protection: IP20, including Inline connector and labeling field

Product description

The terminal is designed for use within an Inline station. It is used to acquire digital signals in the AC voltage range.

Your advantages

- Maximum permissible load current: 500 mA
- Connections for one digital sensor

Commercial data

Item number	2861548
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	DR01
Product key	DRI131
Catalog page	Page 127 (C-6-2019)
GTIN	4017918907433
Weight per piece (including packing)	75.3 g
Weight per piece (excluding packing)	39 g
Customs tariff number	85389099
Country of origin	DE

IB IL 230 DI 1-PAC - Inline terminal




2861548

<https://www.phoenixcontact.com/us/products/2861548>

Technical data

Dimensions

Dimensional drawing	
Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm

Interfaces

Inline local bus	
No. of channels	2
Connection method	Inline data jumper
Transmission speed	500 kbps

System properties

Module	
ID code (dec.)	190
ID code (hex)	BE
Length code (hex)	C2
Length code (dec)	194
Process data channel	2 bit
Input address area	2 bit
Output address area	0 Byte
Register length	2 bit
Required parameter data	1 Byte
Required configuration data	4 Byte

Input data

Digital:

Input name	Digital inputs
Description of the input	IEC 61131-2 type 1
Number of inputs	1
Connection method	Spring-cage connection
Connection technology	3-conductor
Input voltage	230 V AC
Input voltage range "0" signal	0 V AC ... 40 V AC

IB IL 230 DI 1-PAC - Inline terminal



2861548

<https://www.phoenixcontact.com/us/products/2861548>

Input voltage range "1" signal	164 V AC ... 253 V AC
Nominal input voltage U_{IN}	230 V AC
Nominal input current at U_{IN}	6.11 mA (at nominal voltage)
Sensor current per channel	max. 500 mA

Product properties

Product type	I/O component
Product family	Inline
Type	modular
Scope of delivery	including Inline connector and labeling field
No. of channels	1

Data management status

Article revision	05
------------------	----

Electrical properties

Potentials: Communications power (U_L)

Supply voltage	7.5 V DC (via voltage jumper)
Current draw	max. 30 mA

Potentials

Supply voltage	230 V AC
Current draw	max. 0.25 A

Potentials: I/O supply

Supply voltage	230 V AC (via voltage jumper)
Current draw	0.25 A

Supply: Module electronics

Supply voltage	230 V AC
Supply voltage range	12 V AC ... 253 V AC

Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply, incoming remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min.
Test voltage: 5 V supply, outgoing remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min.
Test voltage: 7.5 V supply (bus logics) / I/O area	2500 V AC, 50 Hz, 1 min.
Test voltage: Routine test	1200 V AC, 50 Hz, 1 min.

Connection data

Connection technology

Connection name	Inline connector
-----------------	------------------

Conductor connection

Connection method	Spring-cage connection
Conductor cross section rigid	0.08 mm ² ... 1.5 mm ²

IB IL 230 DI 1-PAC - Inline terminal



2861548

<https://www.phoenixcontact.com/us/products/2861548>

Conductor cross section flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.08 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Degree of protection	IP20
Air pressure (operation)	80 kPa ... 160 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	75 % ... 85 % (in the range of -25°C ... +55°C, appropriate measures against increased humidity (> 85%) must be taken.)
Permissible humidity (storage/transport)	75 % ... 85 % (slight temporary condensation may sometimes appear on the housing)

Standards and regulations

Protection class	I (IEC 61140, EN 61140, VDE 0140-1)
------------------	-------------------------------------

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

IB IL 230 DI 1-PAC - Inline terminal


2861548

<https://www.phoenixcontact.com/us/products/2861548>



Drawings

Connection diagram

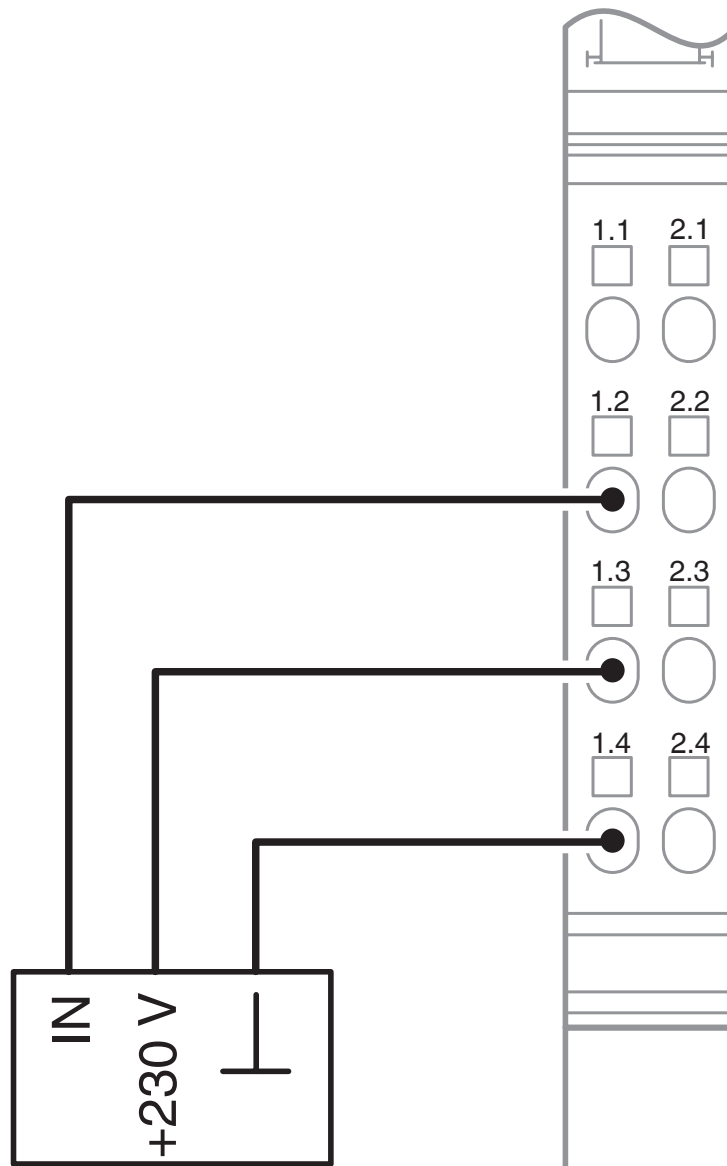


IB IL 230 DI 1-PAC - Inline terminal

2861548

<https://www.phoenixcontact.com/us/products/2861548>

Dimensional drawing

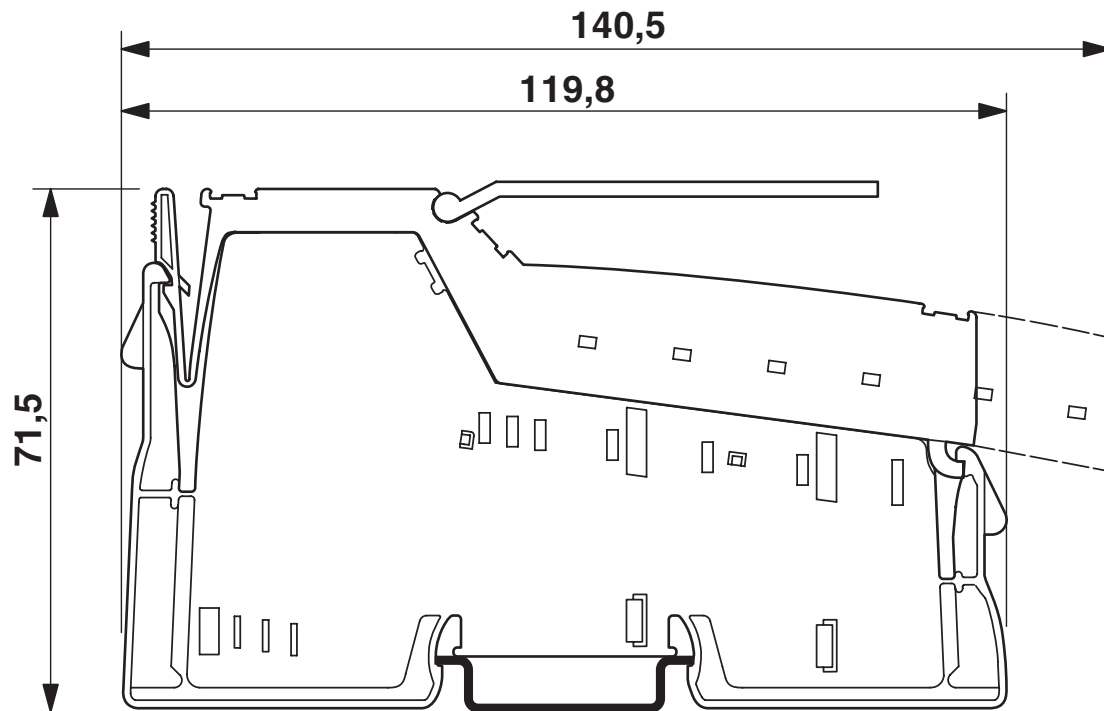


IB IL 230 DI 1-PAC - Inline terminal

2861548

<https://www.phoenixcontact.com/us/products/2861548>



Block diagram

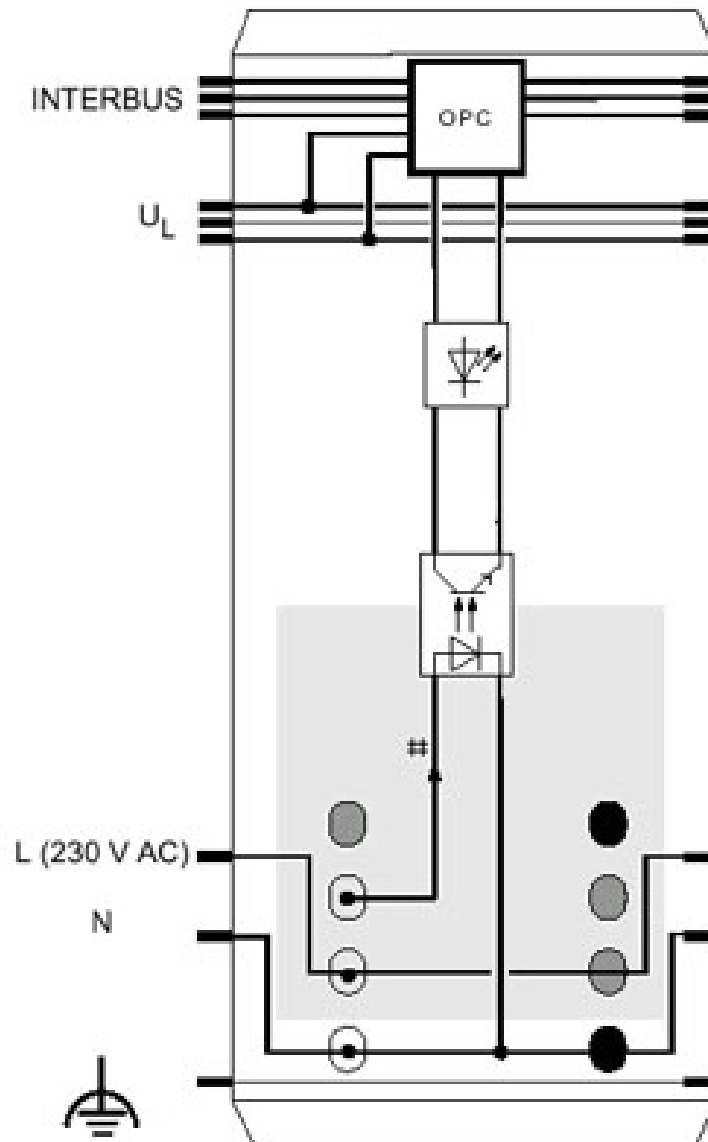

IB IL 230 DI 1-PAC - Inline terminal



2861548

<https://www.phoenixcontact.com/us/products/2861548>

Classifications

ECLASS

ECLASS-11.0	27242604
-------------	----------

ETIM

ETIM 8.0	EC001599
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

IB IL 230 DI 1-PAC - Inline terminal



2861548

<https://www.phoenixcontact.com/us/products/2861548>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

IB IL 230 DI 1-PAC - Inline terminal

2861548

<https://www.phoenixcontact.com/us/products/2861548>



Accessories

IB IL SCN-8-AC-ICP - Inline connector

2740261

<https://www.phoenixcontact.com/us/products/2740261>



Plug, colored identification, for digital 1, -2 or 8-channel Inline input terminal blocks with AC voltage

IB IL FIELD 2 - Marking field

2727501

<https://www.phoenixcontact.com/us/products/2727501>



Marking field, width: 12.2 mm

IB IL 230 DI 1-PAC - Inline terminal

2861548

<https://www.phoenixcontact.com/us/products/2861548>



ESL 62X10 - Insert strip

0809492

<https://www.phoenixcontact.com/us/products/0809492>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, CMS-P1-PLOTTER, mounting type: insert, lettering field size: 62 x 10 mm, Number of individual labels: 72



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com