

# MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299

<https://www.phoenixcontact.com/us/products/2864299>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



MCR temperature transducer for thermocouples, can be configured via DIP switches, with screw connection, standard configuration

## Product description

The configurable temperature transducer with 3-way isolation is suitable for the connection of thermocouples.

The measured values are converted into a linear current or voltage signal.

The device can either be configured via DIP switches or, with extended functionality, via the S-PORT using the software (FDT/DTM). The measuring transducer supports fault monitoring.

## Your advantages

- Power supply possible via the foot element (TBUS)
- For J and K thermocouples according to IEC 60584
- Error indication via diagnostic LED and analog signal
- Temperature measuring range of -150°C to +1350°C
- Highly-compact temperature transducer for electrical isolation, conversion, amplification, and filtering of thermocouple signals to create standard signals
- Internal cold junction compensation
- Input and output signals can be configured via DIP switches
- 3-way isolation

## Commercial data

Item number	2864299
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	C403
Product key	CK1221
Catalog page	Page 108 (C-7-2015)
GTIN	4017918956554
Weight per piece (including packing)	88.9 g
Weight per piece (excluding packing)	69.4 g
Customs tariff number	85437090
Country of origin	DE

# MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299

<https://www.phoenixcontact.com/us/products/2864299>

## Technical data

### Notes

#### Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

### Product properties

Product type	Temperature transmitter
Product family	MINI Analog
No. of channels	1

#### Insulation characteristics

Overvoltage category	II
Pollution degree	2

### Electrical properties

Rated insulation voltage	50 V AC/DC
Electrical isolation	Basic insulation in accordance with EN 61010
Typical cold point errors	< 2 K
Cold point error, max.	< 3 K
Maximum power dissipation for nominal condition	235.5 mW
Test voltage, input/output/supply	1.5 kV AC (50 Hz, 60 s)
Protective circuit	Transient protection
Step response (0–99%)	< 30 ms
Maximum temperature coefficient	< 0.02 %/K
Transmission error in the set measuring range	$((150 \text{ K} / \text{set measurement range [K]}) + 0.1)\%$
Transmission error in the full measuring range	$\leq 0,2 \%$

#### Supply

Nominal supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715)
Max. current consumption	< 25 mA (at 24 V DC)
Power consumption	< 500 mW

### Input data

#### Signal

Number of inputs	1
Input signal	Temperature

#### Measurement

# MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299

<https://www.phoenixcontact.com/us/products/2864299>

Sensor types that can be used (TC)	Thermocouples type J, K (IEC 584-1)
Temperature measuring range	min. 50 K
Sensor type:	-150 °C ... 1200 °C (configurable) -150 °C ... 1350 °C

## Output data

### Signal

Number of outputs	1
Voltage output signal	0 V ... 10 V 10 V ... 0 V 0 V ... 5 V 1 V ... 5 V
Max. voltage output signal	12.5 V
Non-load voltage	approx. 12.5 V
Current output signal	0 mA ... 20 mA 4 mA ... 20 mA 20 mA ... 0 mA 20 mA ... 4 mA
Max. current output signal	23 mA
Short-circuit current	approx. 10 mA
Load/output load voltage output	$\geq 10 \text{ k}\Omega$
Load/output load current output	$< 500 \text{ }\Omega$ (at 20 mA)
Ripple	$< 20 \text{ mV}_{PP}$ (at 500 $\Omega$ ) $< 20 \text{ mV}_{PP}$ (at 10 k $\Omega$ )

## Connection data

Connection method	Screw connection
Stripping length	12 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	26 ... 12

## Dimensions

Dimensional drawing	
Width	6.2 mm
Height	93.1 mm

# MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299

<https://www.phoenixcontact.com/us/products/2864299>

Depth	102.5 mm
-------	----------

## Material specifications

Color	green (RAL 6021)
Housing material	PBT
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 2

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

## Approvals

### CE

Certificate	CE-compliant
-------------	--------------

### ATEX

Identification	Ex II 3 G Ex nA IIC T4 Gc X
----------------	-----------------------------

### UL, USA/Canada

Identification	UL 508 Recognized
	Class I, Div. 2, Groups A, B, C, D T5

### GL

Identification	GL EMC 2 D
----------------	------------

## EMC data

Noise immunity	EN 61000-6-2
Note	When being exposed to interference, there may be minimal deviations.
Electromagnetic compatibility	Conformance with EMC directive
Noise emission	EN 61000-6-4

### Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

### Electrostatic discharge

Comments	Safety measures must be taken to prevent electrostatic discharge.
----------	---

### Electromagnetic HF field

Designation	Electromagnetic RF field
-------------	--------------------------

# MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299

<https://www.phoenixcontact.com/us/products/2864299>

Standards/regulations	EN 61000-4-3
Typical deviation from the measuring range final value	10 %

## Fast transients (burst)

Designation	Fast transients (burst)
Standards/regulations	EN 61000-4-4
Typical deviation from the measuring range final value	10 %

## Surge current load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

## Surge current load (surge)

Comments	Criterion B
----------	-------------

## Conducted interference

Designation	Conducted interferences
Standards/regulations	EN 61000-4-6
Typical deviation from the measuring range final value	10 %

## Standards and regulations

Electrical isolation	Basic insulation in accordance with EN 61010
----------------------	--

## Mounting

Mounting type	DIN rail mounting
Assembly note	The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.
Mounting position	any


# MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299

<https://www.phoenixcontact.com/us/products/2864299>


## Drawings

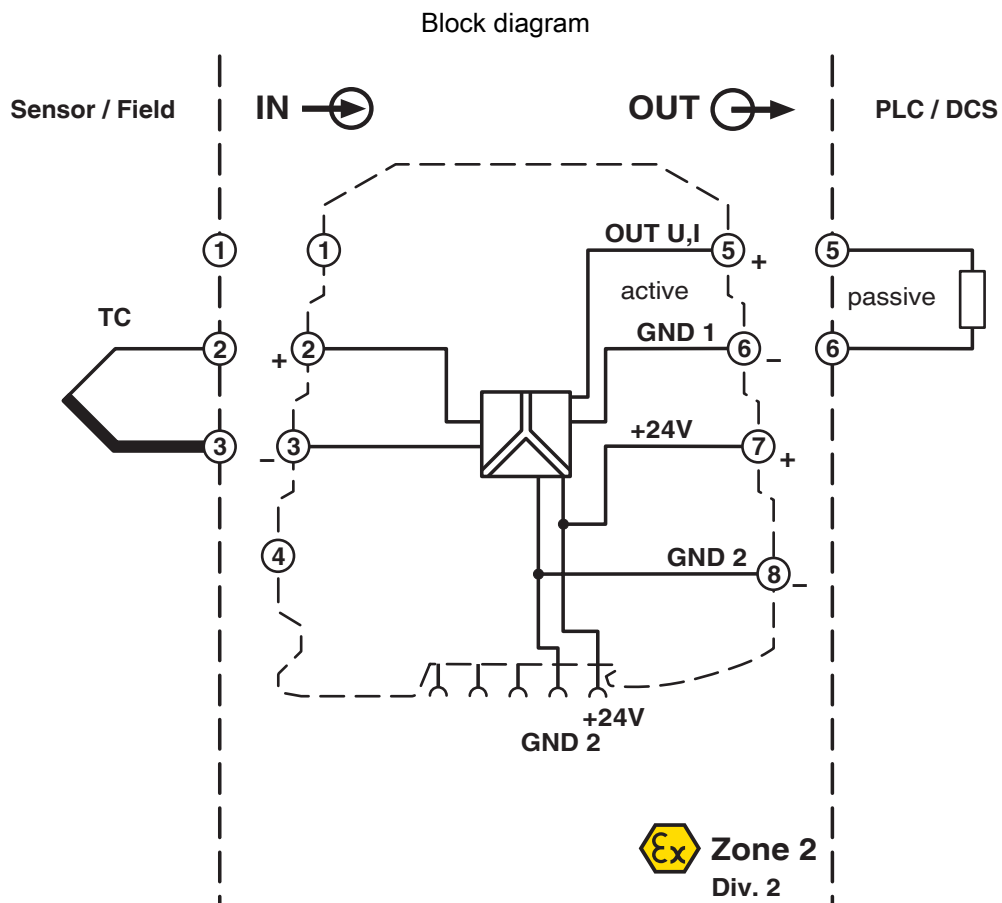

# MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer

2864299

<https://www.phoenixcontact.com/us/products/2864299>

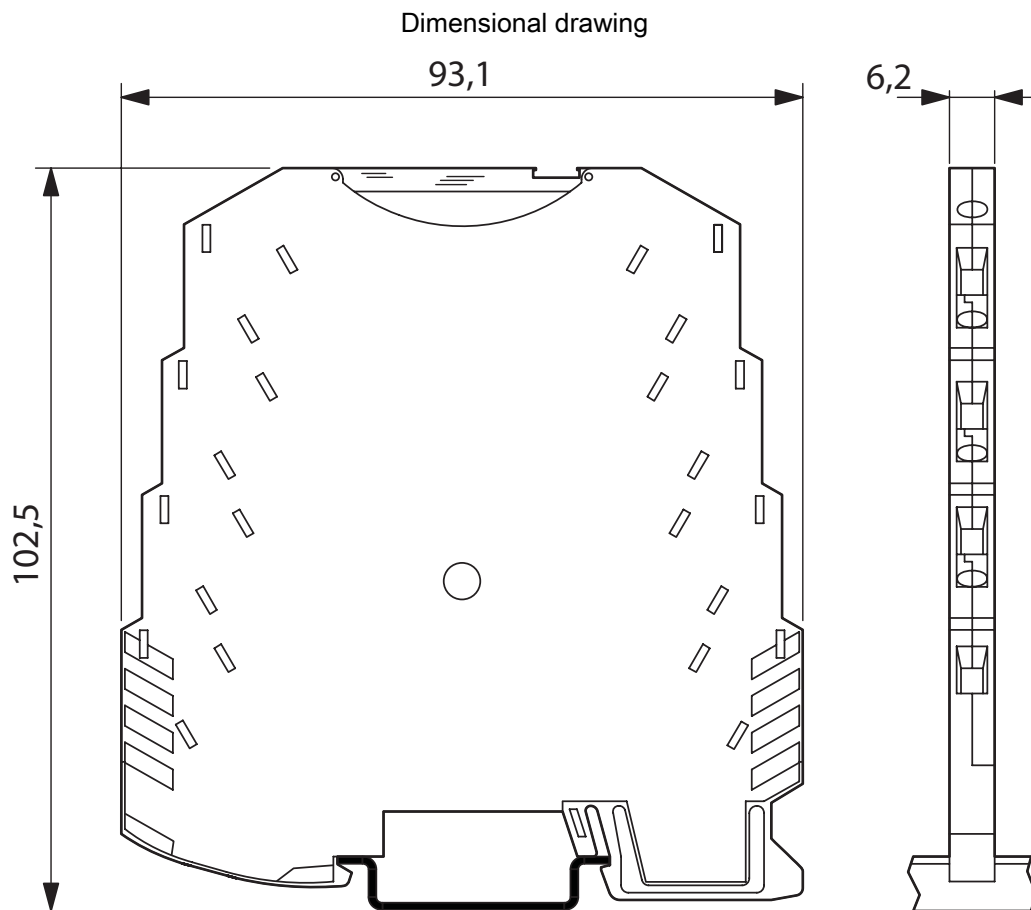

# MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299  
<https://www.phoenixcontact.com/us/products/2864299>

## Classifications

### ECLASS

ECLASS-11.0	27210129
-------------	----------



# MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299  
<https://www.phoenixcontact.com/us/products/2864299>

## Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

# MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299

<https://www.phoenixcontact.com/us/products/2864299>

## Accessories

### IFS-USB-PROG-ADAPTER - Programming adapter

2811271

<https://www.phoenixcontact.com/us/products/2811271>



Programming adapter with USB interface, for programming with software. The USB driver is included in the software solutions for the products to be programmed, such as measuring transducers or motor managers.

---

### MINI MCR-SL-PTB-FM - Power terminal block

2902958

<https://www.phoenixcontact.com/us/products/2902958>



The MINI MCR-SL-PTB-FM(-SP) power terminal block is used to supply the supply voltage to the DIN rail connector. The FM power terminal block offers the additional function of monitoring in combination with the fault monitoring module. Screw connection.

## MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299

<https://www.phoenixcontact.com/us/products/2864299>

## MINI MCR-SL-FM-RC-NC - Monitoring block

2902961

<https://www.phoenixcontact.com/us/products/2902961>




The fault monitoring module is used to evaluate and report group errors from the fault monitoring system and to monitor the supply voltages. The error is reported via an N/O contact. Screw connection, standard configuration.

---

## ME 6,2 TBUS-2 1,5/5-ST-3,81 GN - DIN rail bus connectors

2869728

<https://www.phoenixcontact.com/us/products/2869728>



DIN rail connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.

## MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299

<https://www.phoenixcontact.com/us/products/2864299>

## MINI-SYS-PS-100-240AC/24DC/1.5 - Power supply unit

2866983

<https://www.phoenixcontact.com/us/products/2866983>



Please use the following item in new systems: 2904614

Primary-switched MINI POWER power supply for DIN rail mounting, input: 1-phase, output: 24 V DC/1.5 A

---

## MINI MCR DKL - Transparent cover

2308111

<https://www.phoenixcontact.com/us/products/2308111>



Fold up transparent cover for MINI MCR modules with additional labeling option using insert strips and flat Zack marker strip 6.2 mm

# MINI MCR-SL-TC-UI-NC - Thermocouple measuring transducer



2864299

<https://www.phoenixcontact.com/us/products/2864299>

## MINI MCR-DKL-LABEL - Marking label

2810272

<https://www.phoenixcontact.com/us/products/2810272>

Label for extended marking of MINI MCR modules in connection with the MINI MCR-DKL



---

## SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>

Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)