

RAD-80211-XD/HP-BUS - Wireless module



2900047
<https://www.phoenixcontact.com/us/products/2900047>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



High power WLAN wireless transceiver (transmitter and receiver) with Ethernet, RS-232, RS-485/RS-422 interface and bus foot for use in I/O extension modules, for 2400 MHz ISM band

Your advantages

- Can be programmed for point-to-point, point-to-multipoint, and multipoint-to-point configurations
- Using the integrated web browser interface, the devices can be configured as an access point, bridge or client
- Provides an interface for data transmission between older serial devices (RS-232, RS-422, and RS-485 interfaces) and an Ethernet network
- Supports TCP/IP, UDP, and IPv4 protocols
- High level of security with 128/192/256-bit AES encryption according to 802.11i and optional 802.1x authentication can be set
- Optional, integrated bus foot for connecting RAD-Line extension modules
- Provides an industrial 400 mW wireless transceiver
- In bridge mode, up to 40 nodes can be connected to a single network, creating a reliable wireless network
- Can be used as a Modbus RTU/TCP gateway
- Operates in the license-free 2.4 GHz ISM band

Commercial data

Item number	2900047
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN26
Product key	DNC652
Catalog page	Page 469 (C-6-2017)
GTIN	4046356461573
Weight per piece (including packing)	299.5 g
Weight per piece (excluding packing)	299.5 g
Customs tariff number	85176200
Country of origin	CA

RAD-80211-XD/HP-BUS - Wireless module



2900047

<https://www.phoenixcontact.com/us/products/2900047>

Technical data

Product properties

Product type	Wireless module
--------------	-----------------

Electrical properties

Supply

Supply voltage	24 V DC
Supply voltage range	12 V DC ... 30 V DC
Typical current consumption	230 mA (24 V DC)
Max. current consumption	500 mA (12 V DC)

Output data

Digital

Maximum switching voltage	30 V AC/DC
Max. switching current	0.5 A

Connection data

Connection method	Screw connection
Stripping length	8 mm
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 14
Screw thread	M3

Interfaces

Serial: RS-232

Data rate	300 ... 57,6 kBit/s
Connection method	D-SUB-9 female connector
File format/coding	Asynchronous
Data flow control/protocols	RTS/CTS

Serial: RS-485/RS-422

Data rate	300 ... 57,6 kBit/s
Connection method	COMBICON plug-in screw terminal block

Wireless

Direction	Bi-directional
Frequency	2400 MHz
Frequency range	2.4032 GHz ... 2.4799 GHz
Transmission power	400 mW

Wireless

Antenna connection method	MCX (female)
---------------------------	--------------

RAD-80211-XD/HP-BUS - Wireless module



2900047

<https://www.phoenixcontact.com/us/products/2900047>

Frequency band	2.4 GHz
	5 GHz
Wireless standard	IEEE 802.11
	a
	b
	g

Dimensions

Width	45 mm
Height	99 mm
Depth	115 mm

Material specifications

Color	green
Housing material	Polyamide PA non-reinforced

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C

Approvals


Conformity/Approvals

Conformance	FCC Directive, Part 15.247
	ISC Directive RSS 210
UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D

Mounting

Assembly note	on standard DIN rail NS 35 in accordance with EN 60715
Mounting position	any

Drawings

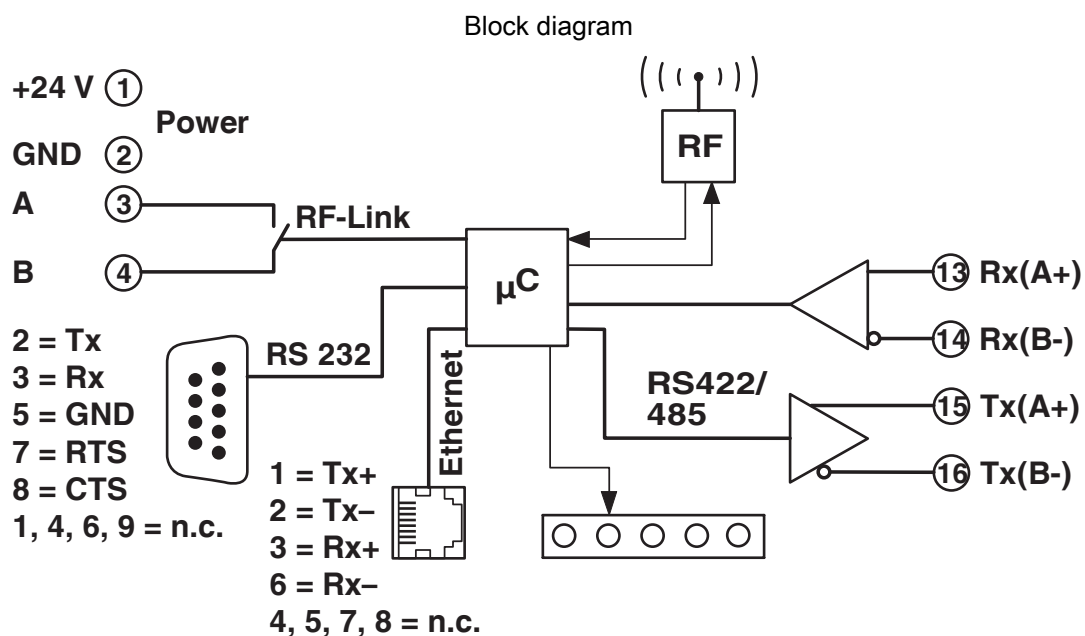

RAD-80211-XD/HP-BUS - Wireless module



2900047

<https://www.phoenixcontact.com/us/products/2900047>

Classifications

UNSPSC

UNSPSC 21.0	43222604
-------------	----------

Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	<div>EFUP-50</div> <div>An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.</div>
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

RAD-80211-XD/HP-BUS - Wireless module



2900047

<https://www.phoenixcontact.com/us/products/2900047>

Accessories

RAD-ISM-2400-ANT-OMNI-2-1 - Antenna

2867461

<https://www.phoenixcontact.com/us/products/2867461>



Omnidirectional antenna, 2.4 GHz, gain: 2 dBi, polarization: linear, opening angle: h/v 360°/75°, degree of protection: IP65, connection: MCX (male), incl. 1.5 m / 5 ft. connecting cable and mounting bracket for wall mounting

RAD-ISM-2400-ANT-VAN- 3-1-MCX - Antenna

2885702

<https://www.phoenixcontact.com/us/products/2885702>



Omnidirectional antenna with protection against vandalism, 2.4 GHz, gain: 3 dBi, polarization: linear, opening angle: h/v 360°/85°, degree of protection: IP55, connection: MCX (male), for control cabinet mounting (optional wall mounting), incl. 1.5 m / 5 ft. connecting cable

RAD-80211-XD/HP-BUS - Wireless module

2900047

<https://www.phoenixcontact.com/us/products/2900047>



RAD-ISM-2400-ANT-OMNI-9-0 - Antenna

2867623

<https://www.phoenixcontact.com/us/products/2867623>



Omnidirectional antenna, 2.4 GHz, gain: 9 dBi, polarization: linear, opening angle: h/v 360°/15°, degree of protection: IP65, connection: N (female), incl. mounting bracket and mast clips

RAD-ISM-2400-ANT-PAN- 8-0 - Antenna

2867610

<https://www.phoenixcontact.com/us/products/2867610>



Directional antenna, 2.4 GHz, gain: 8 dBi, polarization: linear, opening angle: h/v 75°/70°, degree of protection: IP55, connection: SMA (female), incl. mounting bracket and mast clips

RAD-80211-XD/HP-BUS - Wireless module

2900047

<https://www.phoenixcontact.com/us/products/2900047>



RAD-ISM-2400-ANT-OMNI-6-0 - Antenna

2885919

<https://www.phoenixcontact.com/us/products/2885919>

Omnidirectional antenna for wall or mast mounting, 2.4 GHz, gain: 6 dBi, degree of protection: IP67, saltwater-resistant, shock- and vibration-resistant, connection: N (female), incl. mounting bracket and mast clamps, ATEX and IECEx approval



RAD-ISM-2400-DATA-CONFIG-KIT - Configuration set

2885838

<https://www.phoenixcontact.com/us/products/2885838>

Configuration set, consisting of configuration software RAD Link 3.1, Quick Start Guide and User Manual in printed form and interface cable (D-SUB 9 to USB)



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com