


# CBB 08 2X4RC-PT - Potential distributors



2905240  
<https://www.phoenixcontact.com/us/products/2905240>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device circuit breaker boards for eight thermomagnetic (CB TM1...) or electronic (CB E1... NO) circuit breakers with group remote signaling, central supply, connection for relay contacts, and potential distribution for up to four loads per channel.

## Your advantages

- Reduced installation work with a combination of slots for protective modules and potential distributors
- Space savings of up to 35% thanks to compact design
- The system operating state is always available at a glance with integrated group remote signaling
- Up to 4 loads can be protected simultaneously with the additional terminal points

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2905240             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | CL04                |
| Product key                          | CLA211              |
| Catalog page                         | Page 259 (C-6-2015) |
| GTIN                                 | 4046356934459       |
| Weight per piece (including packing) | 497.8 g             |
| Weight per piece (excluding packing) | 497 g               |
| Customs tariff number                | 85363090            |
| Country of origin                    | DE                  |

# CBB 08 2X4RC-PT - Potential distributors



2905240

<https://www.phoenixcontact.com/us/products/2905240>

## Technical data

### Product properties

|                     |                                         |
|---------------------|-----------------------------------------|
| Product type        | Device circuit breaker board            |
| Type                | DIN rail module, two-section, divisible |
| Number of positions | 1                                       |
| No. of channels     | 8                                       |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 02 |
|------------------|----|

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Protection class     | III |
| Overvoltage category | II  |
| Degree of pollution  | 2   |

### Electrical properties

|                                         |                              |
|-----------------------------------------|------------------------------|
| Maximum load current                    | 60 A (Complete main circuit) |
| Maximum current with single arrangement | 12 A (per channel)           |

### General

|                             |                                               |
|-----------------------------|-----------------------------------------------|
| Rated surge voltage         | 0.5 kV                                        |
| Short circuit stability     | 600 A (conditional according to DIN EN 50178) |
| Power dissipation           | 4.9 W (without circuit breaker)               |
| Insertion/withdrawal cycles | 50                                            |

### Main circuit

|                     |                       |
|---------------------|-----------------------|
| Rated voltage       | 24 V DC               |
| Rated current $I_N$ | 60 A DC (total)       |
|                     | 12 A DC (per channel) |

### Remote indication circuit

|                     |          |
|---------------------|----------|
| Rated voltage       | 24 V DC  |
| Rated current $I_N$ | 0.5 A DC |

### Connection data

|                      |                              |
|----------------------|------------------------------|
| Maximum load current | 60 A (Complete main circuit) |
|----------------------|------------------------------|

### Supply X21

|                                                                       |                                             |
|-----------------------------------------------------------------------|---------------------------------------------|
| Connection method                                                     | Push-in connection                          |
| Stripping length                                                      | 18 mm                                       |
| Conductor cross section rigid                                         | 0.75 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Conductor cross section AWG                                           | 20 ... 4                                    |
| Conductor cross section, flexible, with ferrule, with plastic sleeve  | 0.75 mm <sup>2</sup> ... 10 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.75 mm <sup>2</sup> ... 16 mm <sup>2</sup> |

# CBB 08 2X4RC-PT - Potential distributors



2905240

<https://www.phoenixcontact.com/us/products/2905240>


## Outputs X1 ... X8

|                                                                       |                                              |
|-----------------------------------------------------------------------|----------------------------------------------|
| Connection method                                                     | Push-in connection                           |
| Stripping length                                                      | 10 mm                                        |
| Conductor cross section rigid                                         | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>    |
| Conductor cross section AWG                                           | 24 ... 12                                    |
| Conductor cross section, flexible, with ferrule, with plastic sleeve  | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |

## Remote signaling X31

|                                                                       |                                              |
|-----------------------------------------------------------------------|----------------------------------------------|
| Connection method                                                     | Push-in connection                           |
| Stripping length                                                      | 10 mm                                        |
| Conductor cross section rigid                                         | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>    |
| Conductor cross section AWG                                           | 24 ... 12                                    |
| Conductor cross section, flexible, with ferrule, with plastic sleeve  | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |

## Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 170 mm                                                                               |
| Height              | 127.8 mm                                                                             |
| Depth               | 70.8 mm                                                                              |

## Material specifications

|                                        |                 |
|----------------------------------------|-----------------|
| Color                                  | gray (RAL 7042) |
| Material                               | PA 6            |
|                                        | FR4-21          |
| Flammability rating according to UL 94 | V0              |
| Housing material                       | PA 6            |

## Mechanical properties

### Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Environmental and real-life conditions

### Ambient conditions

|                                 |                                          |
|---------------------------------|------------------------------------------|
| Degree of protection            | IP20 (Terminal blocks and fuse holders)  |
|                                 | IP00 (PCB)                               |
| Ambient conditions              | A, B                                     |
| Ambient temperature (operation) | -30 °C ... 60 °C (at 48 A, see derating) |

# CBB 08 2X4RC-PT - Potential distributors



2905240

<https://www.phoenixcontact.com/us/products/2905240>

|                                         |                      |
|-----------------------------------------|----------------------|
| Ambient temperature (storage/transport) | -30 °C ... 80 °C     |
| Humidity test                           | 96 h, 93 % RH, 40 °C |

## Standards and regulations

|                          |                               |
|--------------------------|-------------------------------|
| Standards/specifications | DIN EN 50178                  |
| Note                     | 1997                          |
| Standards/specifications | DIN EN 61000-6-2:2005         |
| Standards/specifications | DIN EN 61000-6-3:2007+A1:2011 |
| Standards/specifications | DIN EN 60068-2-6              |

## Mounting

|                   |                 |
|-------------------|-----------------|
| Mounting type     | DIN rail: 35 mm |
| Mounting position | horizontal      |


# CBB 08 2X4RC-PT - Potential distributors

2905240


<https://www.phoenixcontact.com/us/products/2905240>

## Drawings


Circuit diagram

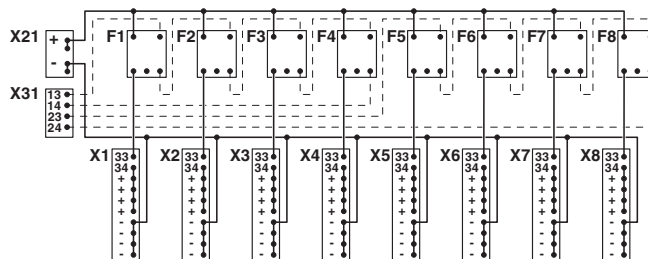

Dimensional drawing

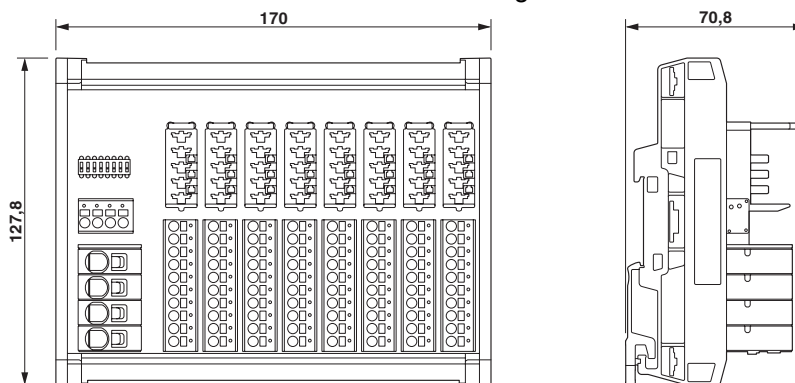

Application drawing

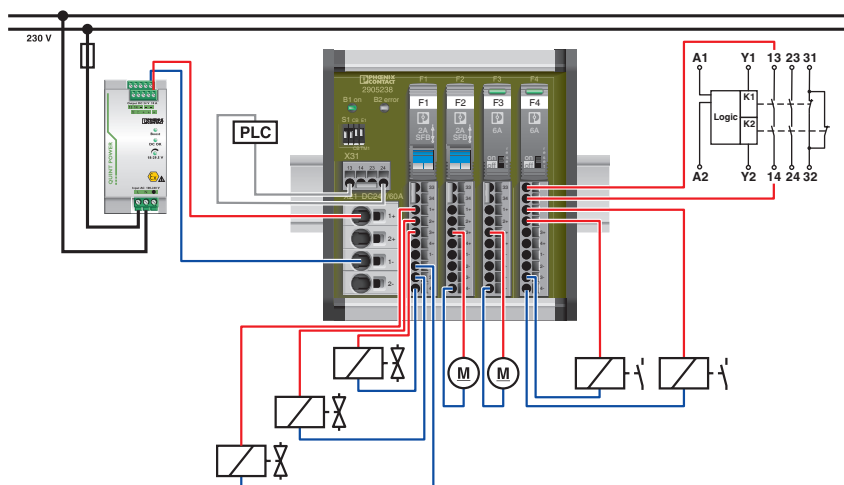

# CBB 08 2X4RC-PT - Potential distributors



2905240

<https://www.phoenixcontact.com/us/products/2905240>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2905240>



**EAC**

Approval ID: RU C-DE.\*09.B.00169

# CBB 08 2X4RC-PT - Potential distributors



2905240

<https://www.phoenixcontact.com/us/products/2905240>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141116 |
| ECLASS-12.0 | 27141116 |
| ECLASS-13.0 | 27250113 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000899 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes                                                                                                                                                                                                                               |
| Exemption                               | 7(a), 7(c)-I                                                                                                                                                                                                                      |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-50                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)                                                                                                                                                                                                              |
| SCIP                                    | e3459755-e562-4d0a-9b3b-325d09d71c08                                                                                                                                                                                              |