


PLT-SEC-T3-BE-FM-UT - Type 3 surge protection
base element

2907924
<https://www.phoenixcontact.com/us/products/2907924>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Base element for protective plugs from the PLT-SEC-...-UT/PT product series with remote indication contact.

Commercial data

Item number	2907924
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	CL19
Product key	CL14A2
Catalog page	Page 82 (C-4-2019)
GTIN	4055626257709
Weight per piece (including packing)	52.4 g
Weight per piece (excluding packing)	48 g
Customs tariff number	85363030
Country of origin	DE

PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element



2907924

<https://www.phoenixcontact.com/us/products/2907924>

Technical data

Product properties

Product type	Base element
Product family	SEC Family
IEC power supply system	TN-S
	TT
Type	DIN rail module, two-section, divisible
Number of positions	2
Surge protection fault message	Remote indication contact

Data management status

Article revision	05
------------------	----

Insulation characteristics

Overvoltage category	III
Pollution degree	2
IEC test classification	II / III
	T2 / T3
EN type	T2 / T3
Number of ports	One

Electrical properties

Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	Changeover contact
Operating voltage	250 V AC
	125 V DC (200 mA DC)
Operating current	0.5 A AC
	0.5 A DC (75 V DC)

Connection data

Connection method	Screw connection
Screw thread	M3
Tightening torque	0.5 Nm
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Conductor cross section AWG	24 ... 12

Dimensions

PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element



2907924

<https://www.phoenixcontact.com/us/products/2907924>

Dimensional drawing	
Width	17.7 mm
Height	93.4 mm
Depth	51.5 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	1 Div.

Material specifications

Color (Male connector)	light gray (RAL 7035)
Color (Base element)	gray (RAL 7042)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6-FR 20 % GF
	PA 6.6-FR
Housing material	PA 6.6-FR 20 % GF
	PA 6.6-FR

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Direction of action	1L-N & N-PE
Nominal voltage U_N	240 V AC (TN-S)
	240 V AC (TT)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous voltage U_C	264 V AC
Rated load current I_L	26 A (at 30 °C)
Short-circuit current rating I_{SCCR}	10 kA AC
Max. backup fuse with branch wiring	depends on the plug used

Additional technical data

Short-circuit current rating I_{SCCR}	max. 5 kA DC (depends on the plug used)
Maximum continuous voltage U_C	240 V DC

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C

PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element



2907924

<https://www.phoenixcontact.com/us/products/2907924>

Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	30g (Half-sine / 11 ms / 3x ±X, ±Y, ±Z)
Vibration (operation)	5g (5 ... 500 Hz / 2.5 h / X, Y, Z)

Approvals

UL specifications

Nominal voltage	240 V DC
Rated load current I_L	20 A
Power distribution system	Single phase
	DC
Nominal frequency	50/60 Hz
SPD Type	ACC

UL indicator/remote signaling

Operating voltage	250 V AC (0.5 A)
DC operating voltage	12 V DC (4 A)
	24 V DC (2 A)
	48 V DC (1 A)

UL connection data

Tightening torque	4.4 lb _f -in.
Conductor cross section AWG	16 ... 12

Standards and regulations

Standards/specifications	IEC 61643-11
Note	2011

EN 61643-11

Standards/specifications	EN 61643-11
Note	2012

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------

PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element




2907924

<https://www.phoenixcontact.com/us/products/2907924>


Drawings

Diagram

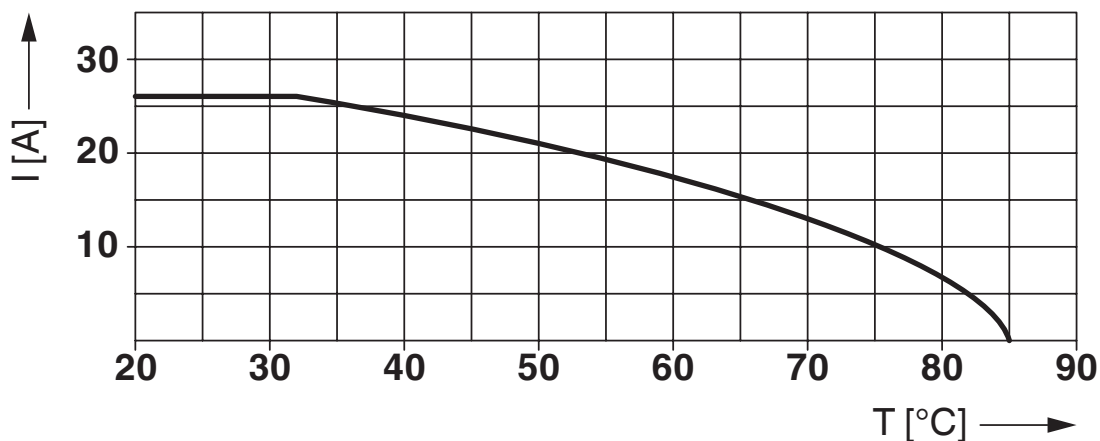

Nominal current depending on ambient temperature

Circuit diagram

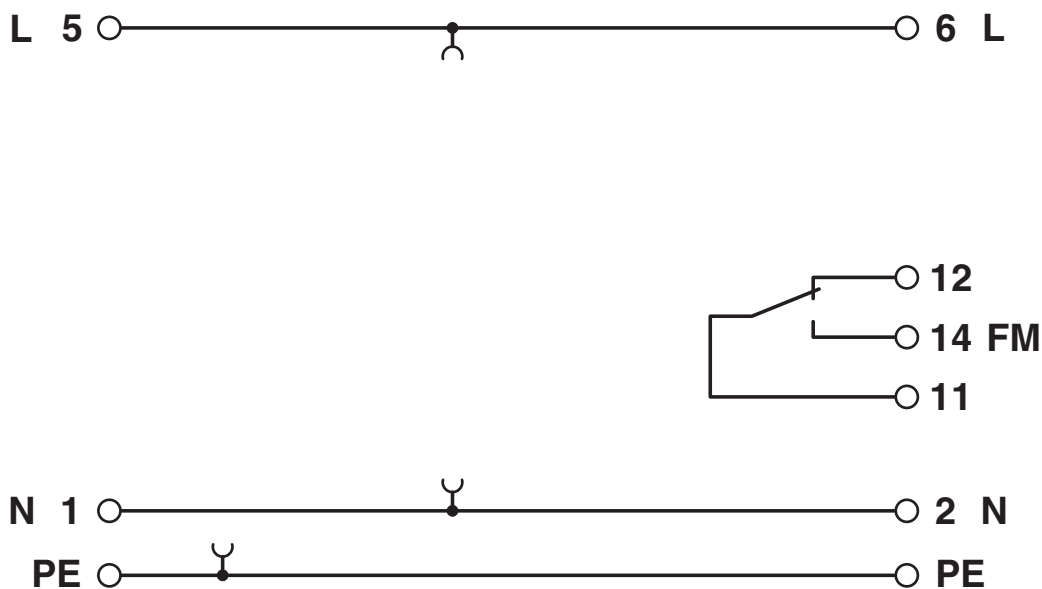


PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element



2907924

<https://www.phoenixcontact.com/us/products/2907924>

Dimensional drawing

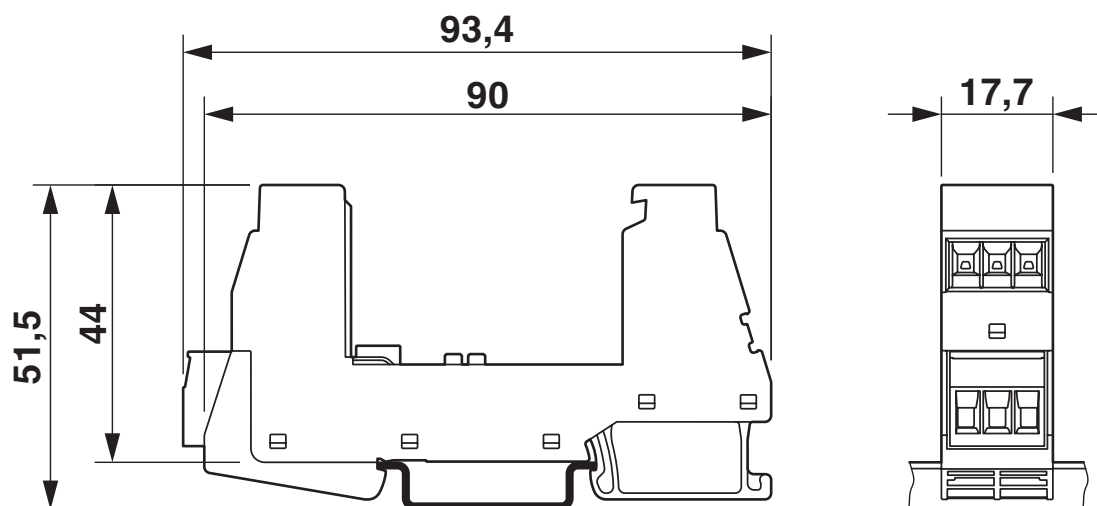

PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element



2907924

<https://www.phoenixcontact.com/us/products/2907924>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2907924>



cUL Recognized
Approval ID: FILE E 330181



UL Recognized
Approval ID: FILE E 330181



IECEE CB Scheme
Approval ID: NL-51083



EAC
Approval ID: RU C-DE.*09.B.00169

CCA

Approval ID: NTR-NL 7676



KEMA-KEUR
Approval ID: 71-103027



CSA
Approval ID: 13631

UAE-RoHS

Approval ID: 23-10-88891

DNV

Approval ID: TAE00002U7



cUL Recognized
Approval ID: FILE E 340736



UL Recognized
Approval ID: FILE E 340736

PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element



2907924

<https://www.phoenixcontact.com/us/products/2907924>

cULus Recognized

cULus Recognized

PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element



2907924
<https://www.phoenixcontact.com/us/products/2907924>

Classifications

ECLASS

ECLASS-11.0	27130803
ECLASS-13.0	27171292

ETIM

ETIM 8.0	EC000472
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element



2907924
<https://www.phoenixcontact.com/us/products/2907924>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element



2907924

<https://www.phoenixcontact.com/us/products/2907924>

Accessories

PLT-SEC-T3-24-P-UT/PT - Type 3 surge protection plug

2907920

<https://www.phoenixcontact.com/us/products/2907920>



Replacement plug for type 3 surge protection from the PLT-SEC-...-UT/PT product series. Nominal voltage 24 V.

PLT-SEC-T3-60-P-UT/PT - Type 3 surge protection plug

2907921

<https://www.phoenixcontact.com/us/products/2907921>



Replacement plug for type 3 surge protection from the PLT-SEC-...-UT/PT product series. Nominal voltage 60 V.

PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element



2907924

<https://www.phoenixcontact.com/us/products/2907924>

PLT-SEC-T3-120-P-UT/PT - Type 3 surge protection plug

2907922

<https://www.phoenixcontact.com/us/products/2907922>



Replacement plug for type 2/3 surge protection from the PLT-SEC-...-UT/PT product series. Nominal voltage 120 V.

PLT-SEC-T3-230-P-UT/PT - Type 3 surge protection plug

2907923

<https://www.phoenixcontact.com/us/products/2907923>



Replacement plug for type 2/3 surge protection from the PLT-SEC-...-UT/PT product series. Nominal voltage 230 V.

PLT-SEC-T3-BE-FM-UT - Type 3 surge protection base element



2907924

<https://www.phoenixcontact.com/us/products/2907924>

SZS 0,6X3,5 VDE - Screwdriver

1212602

<https://www.phoenixcontact.com/us/products/1212602>



Screwdriver, slot-headed, VDE insulated, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com