

# GDT-US-NG/40-P - Type 1 surge protection plug



2910342

<https://www.phoenixcontact.com/us/products/2910342>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



UL Recognized type 1 SPD and IEC type 2 surge protection plug with a gas discharge tube and thermal disconnect for use with VAL-US base elements, mechanical and visual fault warning

## Product description

Surge protective device replacement plug

## Your advantages

- Thermal disconnect device for each individual plug
- Optical, mechanical status indication for the individual arresters
- Mechanical coding of all slots
- Consists of base element and plug
- Pluggable

## Commercial data

|                                      |                    |
|--------------------------------------|--------------------|
| Item number                          | 2910342            |
| Packing unit                         | 1 pc               |
| Minimum order quantity               | 1 pc               |
| Sales key                            | CL18               |
| Product key                          | CL1321             |
| Catalog page                         | Page 93 (C-4-2019) |
| GTIN                                 | 4055626444840      |
| Weight per piece (including packing) | 42.5 g             |
| Weight per piece (excluding packing) | 40 g               |
| Customs tariff number                | 85363030           |
| Country of origin                    | DE                 |

# GDT-US-NG/40-P - Type 1 surge protection plug



2910342  
<https://www.phoenixcontact.com/us/products/2910342>

## Technical data

### Notes

|         |          |
|---------|----------|
| General | Used in: |
|---------|----------|

### Product properties

|                                |                  |
|--------------------------------|------------------|
| Product type                   | Replacement plug |
| Product family                 | VALVETRAB MS     |
| IEC test classification        | II               |
|                                | T2               |
| EN type                        | T2               |
| Type                           | Male             |
| Number of positions            | 1                |
| Surge protection fault message | optical          |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 00 |
|------------------|----|

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Pollution degree     | 2   |


### Electrical properties

|                         |               |
|-------------------------|---------------|
| Nominal frequency $f_N$ | 50 Hz (60 Hz) |
|-------------------------|---------------|

### Connection data

|                   |                          |
|-------------------|--------------------------|
| Connection method | VALVETRAB plug-in system |
|-------------------|--------------------------|

### Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 17.5 mm                                                                              |
| Height              | 52.4 mm                                                                              |
| Depth               | 55.3 mm                                                                              |
| Horizontal pitch    | 1 Div.                                                                               |

### Material specifications

|                                        |                  |
|----------------------------------------|------------------|
| Color                                  | black (RAL 9005) |
| Flammability rating according to UL 94 | V-0              |
| CTI value of material                  | 600              |

# GDT-US-NG/40-P - Type 1 surge protection plug



2910342

<https://www.phoenixcontact.com/us/products/2910342>

|                     |            |
|---------------------|------------|
| Insulating material | PA 6.6/PBT |
| Material group      | I          |
| Housing material    | PA 6.6     |
|                     | PBT        |

## Protective circuit

|                                                          |                                     |
|----------------------------------------------------------|-------------------------------------|
| Mode of protection                                       | N-PE                                |
| Direction of action                                      | N-PE                                |
| Nominal voltage $U_N$                                    | 277/480 V AC (TN-S)                 |
|                                                          | 277/480 V AC (TT)                   |
| Nominal frequency $f_N$                                  | 50 Hz (60 Hz)                       |
| Maximum continuous voltage $U_C$                         | 305 V AC                            |
| Residual current $I_{PE}$                                | $\leq 5 \mu A$                      |
| Standby power consumption $P_C$                          | $\leq 1.50 \text{ mVA}$             |
| Nominal discharge current $I_n$ (8/20) $\mu s$           | 20 kA                               |
| Maximum discharge current $I_{max}$ (8/20) $\mu s$       | 40 kA                               |
| Follow current interrupt rating $I_{fi}$                 | 100 A (260 V)                       |
| Voltage protection level $U_p$                           | $\leq 1.5 \text{ kV}$               |
| Residual voltage $U_{res}$                               | $\leq 0.4 \text{ kV}$ (at $I_n$ )   |
|                                                          | $\leq 0.25 \text{ kV}$ (at 10 kA)   |
|                                                          | $\leq 0.15 \text{ kV}$ (at 5 kA)    |
|                                                          | $\leq 0.1 \text{ kV}$ (at 3 kA)     |
| Front of wave sparkover voltage at 6 kV (1.2/50) $\mu s$ | $\leq 1.5 \text{ kV}$               |
| TOV behavior at $U_T$                                    | 1200 V AC (200 ms / withstand mode) |
| Response time $t_A$                                      | $\leq 100 \text{ ns}$               |

## Environmental and real-life conditions

### Ambient conditions

|                                         |                                                           |
|-----------------------------------------|-----------------------------------------------------------|
| Degree of protection                    | IP20                                                      |
| Ambient temperature (operation)         | -40 °C ... 80 °C                                          |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C                                          |
| Altitude                                | $\leq 2000 \text{ m}$ (amsl)                              |
| Permissible humidity (operation)        | 5 % ... 95 %                                              |
| Shock (operation)                       | 25g (Half-sine / 11 ms / 3x $\pm X$ , $\pm Y$ , $\pm Z$ ) |
| Vibration (operation)                   | 5g (10 ... 500 Hz / 2.5 h / X, Y, Z)                      |

## Approvals

### UL specifications

|                                           |          |
|-------------------------------------------|----------|
| Maximum continuous operating voltage MCOV | 305 V AC |
| Voltage protection rating VPR             | 1200 V   |
| UL type                                   | type 1   |
| Nominal discharge current $I_n$           | 20 kA    |
| Maximum Surge Current per Phase           | 40 kA    |

# GDT-US-NG/40-P - Type 1 surge protection plug



2910342

<https://www.phoenixcontact.com/us/products/2910342>

|                           |              |
|---------------------------|--------------|
| Mode of protection        | N-G          |
| Nominal voltage           | 277 V AC     |
| Power distribution system | Single phase |
| Nominal frequency         | 50/60 Hz     |
| SPD Type                  | 1CA          |

## Standards and regulations

|                          |              |
|--------------------------|--------------|
| Standards/specifications | IEC 61643-11 |
| Note                     | 2011         |
| Standards/specifications | EN 61643-11  |
| Note                     | 2012         |

## Mounting

|               |                 |
|---------------|-----------------|
| Mounting type | on base element |
|---------------|-----------------|


# GDT-US-NG/40-P - Type 1 surge protection plug

2910342

<https://www.phoenixcontact.com/us/products/2910342>



## Drawings

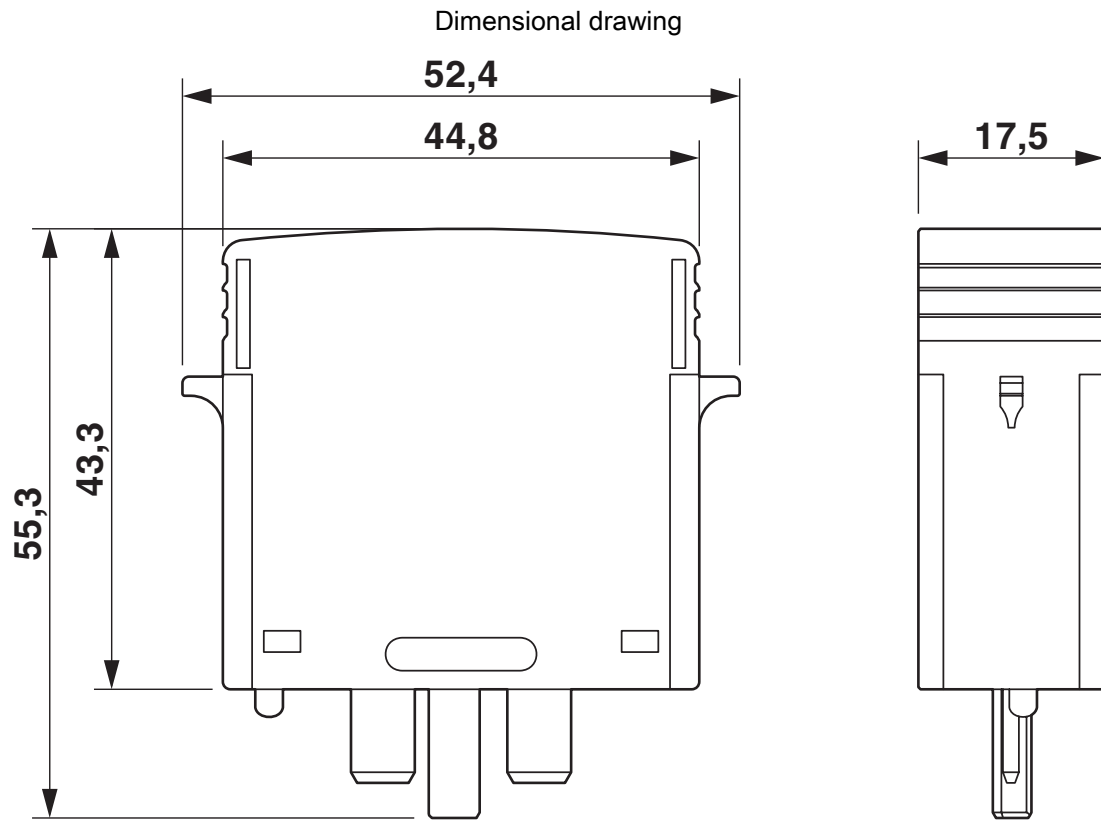

Circuit diagram



# GDT-US-NG/40-P - Type 1 surge protection plug



2910342

<https://www.phoenixcontact.com/us/products/2910342>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2910342>



**cUL Recognized**  
Approval ID: FILE E 330181



**UL Recognized**  
Approval ID: FILE E 330181

**cULus Recognized**

# GDT-US-NG/40-P - Type 1 surge protection plug



2910342

<https://www.phoenixcontact.com/us/products/2910342>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27130890 |
| ECLASS-13.0 | 27171292 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002496 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121600 |
|-------------|----------|

# GDT-US-NG/40-P - Type 1 surge protection plug



2910342

<https://www.phoenixcontact.com/us/products/2910342>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# GDT-US-NG/40-P - Type 1 surge protection plug

2910342

<https://www.phoenixcontact.com/us/products/2910342>



## Accessories

### VAL-US-120/40/1+1-FM - Type 1 surge protection device

2910349

<https://www.phoenixcontact.com/us/products/2910349>



Surge protective device, two channel with remote indicator contact for 120 V AC, 2-wire plus ground.

---

### VAL-US-120/40/2+1-FM - Type 1 surge protection device

2910352

<https://www.phoenixcontact.com/us/products/2910352>



Surge protective device, three channel with remote indicator contact for 120/240 V split phase AC, 3-wire plus ground.

## GDT-US-NG/40-P - Type 1 surge protection plug

2910342

<https://www.phoenixcontact.com/us/products/2910342>



## VAL-US-120/40/3+1-FM - Type 1 surge protection device

2910354

<https://www.phoenixcontact.com/us/products/2910354>



Surge protective device, four channel with remote indicator contact for 120/208 V Wye three phase AC, 4-wire plus ground.

---

## VAL-US-240/40/1+1-FM - Type 1 surge protection device

2910362

<https://www.phoenixcontact.com/us/products/2910362>



Surge protective device, two channel with remote indicator contact for 240 V AC, 2-wire plus ground.

## GDT-US-NG/40-P - Type 1 surge protection plug

2910342

<https://www.phoenixcontact.com/us/products/2910342>



## VAL-US-240/40/2+1-FM - Type 1 surge protection device

2910365

<https://www.phoenixcontact.com/us/products/2910365>



Surge protective device, three channel with remote indicator contact for 240/480 V split phase AC, 3-wire plus ground.

---

## VAL-US-240/40/3+1-FM - Type 1 surge protection device

2910367

<https://www.phoenixcontact.com/us/products/2910367>



Surge protective device, four channel with remote indicator contact for 240/415 V AC, 4-wire plus ground.

## GDT-US-NG/40-P - Type 1 surge protection plug

2910342

<https://www.phoenixcontact.com/us/products/2910342>



## VAL-US-240HLD/40/3+1-FM - Type 1 surge protection device

2910371

<https://www.phoenixcontact.com/us/products/2910371>



Surge protective device, four channel with remote indicator contact for 240 V AC high-leg DELTA.

---

## VAL-US-277/40/1+1-FM - Type 1 surge protection device

2910373

<https://www.phoenixcontact.com/us/products/2910373>



Surge protective device, two channel with remote indicator contact for 277 V AC, 2-wire plus ground.

# GDT-US-NG/40-P - Type 1 surge protection plug

2910342

<https://www.phoenixcontact.com/us/products/2910342>



## VAL-US-277/40/3+1-FM - Type 1 surge protection device

2910374

<https://www.phoenixcontact.com/us/products/2910374>



Surge protective device, four channel with remote indicator contact for 277/480 V AC, 4-wire plus ground.

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)