

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

DIN rail power supply unit, primary-switched mode, 1-phase, output: 48 V DC / 20 A



Product description

QUINT POWER is the powerful 60 - 960 W DC power supply unit for universal use. With its wide-range input, single and three-phase versions, and international approval package, this solution is unrivalled. QUINT POWER provides reliable power supply: generously dimensioned capacitors ensure mains buffering of over 20 ms at full load. Full output power is provided by all three-phase devices, even in the event of a permanent phase failure. The Power Boost power reserve easily starts loads with high inrush currents and ensures that fuses are reliably tripped. Preventive function monitoring diagnoses impermissible operating states and minimizes downtimes in your system. Remote monitoring is provided by an active transistor switching output and a floating relay contact. All devices are idling-proof and short-circuit-proof, and are available with a regulated and adjustable output voltage of 12, 24, and 48 V DC with output currents of 2.5, 5, 10, 20, 30, and 40 A. Power supply units for use in Ex zone 2, uninterruptible solutions, AS-i power supply units, and a QUINT diode complete this comprehensive product range.

Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 2938976                        |
| Packing unit                         | 1 pc                           |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | CM11                           |
| Product key                          | CMPP14                         |
| Catalog page                         | Page 567 (IF-2009)             |
| GTIN                                 | 4017918987107                  |
| Weight per piece (including packing) | 3,806 g                        |
| Weight per piece (excluding packing) | 3,500 g                        |
| Customs tariff number                | 85044030                       |
| Country of origin                    | CN                             |

# QUINT-PS-100-240AC/48DC/20 - Power supply unit



2938976

<https://www.phoenixcontact.com/us/products/2938976>

## Technical data

### Input data

#### AC operation

|                                          |                                                      |
|------------------------------------------|------------------------------------------------------|
| Nominal input voltage range              | 110 V AC ... 240 V AC (Derating < 100 V AC; 2.5 %/V) |
| Input voltage range                      | 85 V AC ... 264 V AC                                 |
|                                          | 90 V DC ... 350 V DC                                 |
| Input voltage range AC                   | 85 V AC ... 264 V AC                                 |
| Input voltage range DC                   | 90 V DC ... 350 V DC                                 |
| Voltage type of supply voltage           | AC/DC                                                |
| Inrush current                           | < 15 A (typical)                                     |
| Inrush current integral ( $I^2t$ )       | 3.2 A <sup>2</sup> s                                 |
| AC frequency range                       | 45 Hz ... 65 Hz                                      |
| Frequency range DC                       | 0 Hz                                                 |
| Mains buffering time                     | > 20 ms (120 V AC)                                   |
|                                          | > 20 ms (230 V AC)                                   |
| Current consumption                      | approx. 11 A (120 V AC)                              |
|                                          | 4.5 A (230 V AC)                                     |
| Nominal power consumption                | 1048 W                                               |
| Protective circuit                       | Transient surge protection; Varistor                 |
| Typical response time                    | < 1 s                                                |
| Input fuse                               | 20 A (fast blow, internal)                           |
| Recommended breaker for input protection | 16 A ... 25 A (Characteristics B, C, D, K)           |

### Output data

|                                                    |                                                               |
|----------------------------------------------------|---------------------------------------------------------------|
| Efficiency                                         | > 92 % (for 230 V AC and nominal values)                      |
| Nominal output voltage                             | 48 V DC $\pm 1$ %                                             |
| Setting range of the output voltage ( $U_{Set}$ )  | 30 V DC ... 56 V DC (> 48 V DC, constant capacity restricted) |
| Nominal output current ( $I_N$ )                   | 20 A (-25 °C ... 60 °C)                                       |
| POWER BOOST ( $I_{Boost}$ )                        | 22.5 A (< 40 °C permanent)                                    |
| Derating                                           | 60 °C ... 70 °C (2.5 %/K)                                     |
| Feedback voltage resistance                        | 60 V DC                                                       |
| Protection against overvoltage at the output (OVP) | $\leq 60$ V DC                                                |
| Max. capacitive load                               | unlimited                                                     |
| Active current limitation                          | Approx. $I_{Boost} = 22.5$ A (for short-circuit)              |
| Control deviation                                  | < 1 % (change in load, static 10 % ... 90 %)                  |
|                                                    | < 2 % (change in load, dynamic 10 % ... 90 %)                 |
|                                                    | < 0.1 % (change in input voltage $\pm 10$ %)                  |
| Residual ripple                                    | < 25 mV <sub>PP</sub> (with nominal values)                   |
| Output power                                       | 960 W                                                         |
| Peak switching voltages nominal load               | < 30 mV <sub>PP</sub> (20 MHz)                                |
| Maximum no-load power dissipation                  | 28 W                                                          |
| Power loss nominal load max.                       | 80 W                                                          |

# QUINT-PS-100-240AC/48DC/20 - Power supply unit



2938976

<https://www.phoenixcontact.com/us/products/2938976>

|                        |                                            |
|------------------------|--------------------------------------------|
| Rise time              | < 2 ms ( $U_{OUT}$ (10 % ... 90 %))        |
| Connection in parallel | yes, for redundancy and increased capacity |
| Connection in series   | yes                                        |

Signal: DC OK active

|                           |                                          |
|---------------------------|------------------------------------------|
| Output description        | $U_{OUT} > 0.9 \times U_N$ : High signal |
| Maximum switching voltage | $\leq 24$ V                              |
| Output voltage            | + 24 V DC                                |
| Maximum inrush current    | $\leq 20$ mA                             |
| Continuous load current   | $\leq 20$ mA                             |

Signal: DC OK floating

|                           |                                                            |
|---------------------------|------------------------------------------------------------|
| Output description        | Relay contact, $U_{OUT} > 0.9 \times U_N$ : Contact closed |
| Maximum switching voltage | $\leq 30$ V AC/DC                                          |
| Maximum inrush current    | $\leq 1$ A                                                 |
| Continuous load current   | $\leq 1$ A                                                 |

## Connection data

Input

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Screw connection    |
| Conductor cross section, rigid min.   | 0.2 mm <sup>2</sup> |
| Conductor cross section, rigid max.   | 6 mm <sup>2</sup>   |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 4 mm <sup>2</sup>   |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 10                  |
| Stripping length                      | 8 mm                |
| Screw thread                          | M3                  |
| Tightening torque, min                | 0.5 Nm              |
| Tightening torque max                 | 0.6 Nm              |

Output

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Screw connection    |
| Conductor cross section, rigid min.   | 0.5 mm <sup>2</sup> |
| Conductor cross section, rigid max.   | 16 mm <sup>2</sup>  |
| Conductor cross section flexible min. | 0.5 mm <sup>2</sup> |
| Conductor cross section flexible max. | 10 mm <sup>2</sup>  |
| Conductor cross section AWG min.      | 20                  |
| Conductor cross section AWG max.      | 6                   |
| Stripping length                      | 10 mm               |
| Screw thread                          | M4                  |
| Tightening torque, min                | 0.5 Nm              |
| Tightening torque max                 | 0.6 Nm              |

Signal

# QUINT-PS-100-240AC/48DC/20 - Power supply unit



2938976

<https://www.phoenixcontact.com/us/products/2938976>

|                                       |                     |
|---------------------------------------|---------------------|
| Conductor cross section, rigid min.   | 0.2 mm <sup>2</sup> |
| Conductor cross section, rigid max.   | 6 mm <sup>2</sup>   |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 4 mm <sup>2</sup>   |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 10                  |
| Screw thread                          | M3                  |
| Tightening torque, min                | 0.5 Nm              |
| Tightening torque max                 | 0.6 Nm              |

## Signaling

|                           |                         |
|---------------------------|-------------------------|
| Types of signaling        | LED                     |
|                           | Active switching output |
|                           | Relay contact           |
| Operating voltage display | Green LED               |

### Signal output: DC OK active

|                        |                                           |
|------------------------|-------------------------------------------|
| Status display         | "DC OK" LED green                         |
| Note on status display | $U_{OUT} < 0.9 \times U_N$ : LED flashing |

### Signal output: DC OK floating

|                        |                                           |
|------------------------|-------------------------------------------|
| Status display         | "DC OK" LED green                         |
| Note on status display | $U_{OUT} < 0.9 \times U_N$ : LED flashing |

## Electrical properties

|                                 |                        |
|---------------------------------|------------------------|
| Insulation voltage input/output | 4 kV AC (type test)    |
|                                 | 2 kV AC (routine test) |
| Insulation voltage output / PE  | 500 V DC               |
| Insulation voltage input / PE   | 3.5 kV AC (type test)  |
|                                 | 2 kV AC (routine test) |

## Product properties

|                            |              |
|----------------------------|--------------|
| Product type               | Power supply |
| Product family             | QUINT POWER  |
| MTBF (IEC 61709, SN 29500) | > 500000 h   |

### Insulation characteristics

|                     |                        |
|---------------------|------------------------|
| Protection class    | I (with PE connection) |
| Degree of pollution | 2                      |

## Dimensions

|        |        |
|--------|--------|
| Width  | 240 mm |
| Height | 130 mm |
| Depth  | 125 mm |

### Alternative assembly

# QUINT-PS-100-240AC/48DC/20 - Power supply unit



2938976

<https://www.phoenixcontact.com/us/products/2938976>

|        |        |
|--------|--------|
| Width  | 122 mm |
| Height | 130 mm |
| Depth  | 243 mm |

## Mounting

|                   |                                                |
|-------------------|------------------------------------------------|
| Assembly note     | alignable: horizontally 0 mm, vertically 50 mm |
| Mounting position | horizontal DIN rail NS 35, EN 60715            |

## Material specifications

|                  |                |
|------------------|----------------|
| Housing material | Metal          |
| Type of housing  | AluNox (AlMg1) |

## Environmental and real-life conditions

### Ambient conditions

|                                                |                                                                                                 |
|------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Degree of protection                           | IP20                                                                                            |
| Ambient temperature (operation)                | -25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K)                                                    |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C                                                                                |
| Max. permissible relative humidity (operation) | 95 % (at 25 °C, non-condensing)                                                                 |
| Shock                                          | 18 ms, 30g, in each space direction (according to IEC 60068-2-27)                               |
| Vibration (operation)                          | < 15 Hz, amplitude $\pm 2.5$ mm (according to IEC 60068-2-6)<br>15 Hz ... 150 Hz, 2.3g, 90 min. |

## Standards and regulations

|                                                                                                                                  |                                             |
|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV)                    |
| Standard – Limitation of mains harmonic currents                                                                                 | EN 61000-3-2                                |
| Standard - Electrical safety                                                                                                     | EN 60950-1/VDE 0805 (SELV)<br>EN 61558-2-17 |
| Standard - Equipment safety                                                                                                      | GS (tested safety)                          |
| Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment               | EN 50178                                    |
| Standard – Safety extra-low voltage                                                                                              | EN 60950-1 (SELV)<br>EN 60204 (PELV)        |
| Standard - Safe isolation                                                                                                        | DIN VDE 0100-410                            |
| Standard - Safety of transformers                                                                                                | EN 61558-2-17                               |

### Overvoltage category

|            |     |
|------------|-----|
| EN 62477-1 | III |
|------------|-----|

## Approvals

|              |                                                        |
|--------------|--------------------------------------------------------|
| UL approvals | UL/C-UL listed UL 508<br>UL/C-UL Recognized UL 60950-1 |
|--------------|--------------------------------------------------------|

## EMC data

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Low Voltage Directive | Conformance with Low Voltage Directive 2014/35/EC |
|-----------------------|---------------------------------------------------|

# QUINT-PS-100-240AC/48DC/20 - Power supply unit



2938976

<https://www.phoenixcontact.com/us/products/2938976>

|                                     |                                           |
|-------------------------------------|-------------------------------------------|
| EMC requirements for noise emission | EN 61000-6-3                              |
|                                     | EN 61000-6-4                              |
| EMC requirements for noise immunity | EN 61000-6-1                              |
|                                     | EN 61000-6-2                              |
| Electromagnetic compatibility       | Conformance with EMC Directive 2014/30/EU |
| Noise emission                      | EN 55011 (EN 55022)                       |

## Electrostatic discharge

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
| Housing               | Level 4      |

## Electrostatic discharge

|                   |             |
|-------------------|-------------|
| Contact discharge | 8 kV        |
| Discharge in air  | 15 kV       |
| Comments          | Criterion B |

## Electromagnetic HF field

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

## Electromagnetic HF field

|                     |                  |
|---------------------|------------------|
| Frequency range     | 80 MHz ... 2 GHz |
| Test field strength | 10 V/m           |
| Comments            | Criterion A      |

## Fast transients (burst)

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

## Fast transients (burst)

|        |                               |
|--------|-------------------------------|
| Input  | 4 kV (level 4 - asymmetrical) |
| Output | 2 kV (Level 3 - asymmetrical) |
| Signal | 1 kV (Level 2 - asymmetrical) |

## Surge voltage load (surge)

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-5 |
|-----------------------|--------------|

## Surge voltage load (surge)

|          |                                                          |
|----------|----------------------------------------------------------|
| Input    | 4 kV (inst. class 4 - asymmetrical: conductor to ground) |
|          | 2 kV (Inst. Class 4 – symmetrical: Conductor to ground)  |
| Output   | 0.5 kV (level 1 - asymmetrical: conductor to ground)     |
|          | 0.5 kV (Level 1 - symmetrical: Conductor to ground)      |
| Signal   | 1 kV (level 2 - asymmetrical: conductor to ground)       |
| Comments | Criterion B                                              |

## Conducted interference

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

## Conducted interference

|       |                        |
|-------|------------------------|
| I/O/S | Level 3 - asymmetrical |
|-------|------------------------|

# QUINT-PS-100-240AC/48DC/20 - Power supply unit



2938976

<https://www.phoenixcontact.com/us/products/2938976>

|                 |                     |
|-----------------|---------------------|
| Frequency range | 0.15 MHz ... 80 MHz |
| Comments        | Criterion A         |
| Voltage         | 10 V                |

Voltage dips


|                       |               |
|-----------------------|---------------|
| Standards/regulations | EN 61000-4-11 |
|-----------------------|---------------|

Emitted interference

|                                                  |                                                                            |
|--------------------------------------------------|----------------------------------------------------------------------------|
| Standards/regulations                            | EN 61000-6-3                                                               |
| Radio interference voltage in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |
| Emitted radio interference in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |

## Drawings

### Circuit diagram

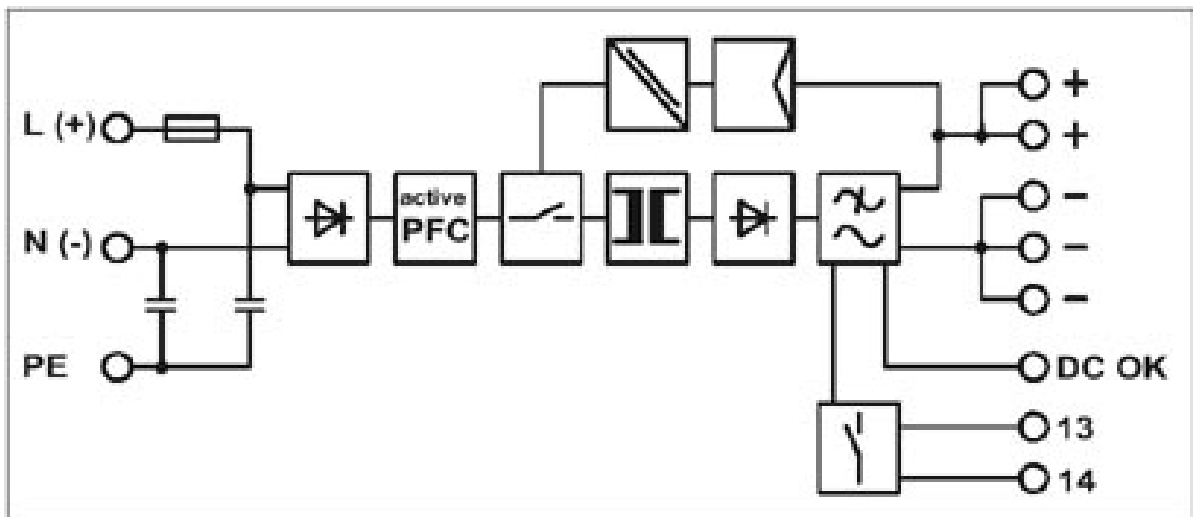


# QUINT-PS-100-240AC/48DC/20 - Power supply unit



2938976

<https://www.phoenixcontact.com/us/products/2938976>

Block diagram

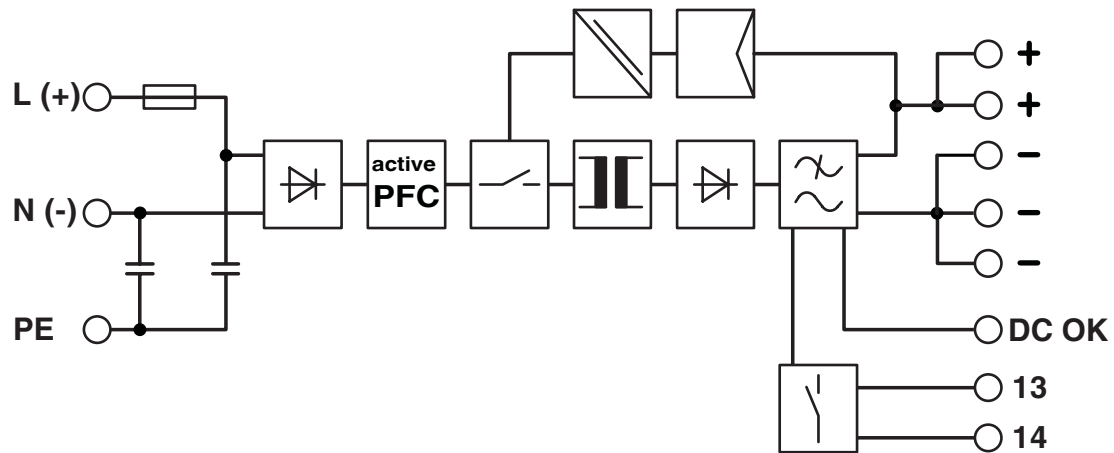

# QUINT-PS-100-240AC/48DC/20 - Power supply unit



2938976

<https://www.phoenixcontact.com/us/products/2938976>

## Classifications

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121004 |
|-------------|----------|

Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes                                                                                                                                                                                                                               |
| Exemption                               | 7(a), 7(c)-I                                                                                                                                                                                                                      |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-25                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)                                                                                                                                                                                                              |

# QUINT-PS-100-240AC/48DC/20 - Power supply unit



2938976

<https://www.phoenixcontact.com/us/products/2938976>

## Accessories

### UWA 182/52 - Mounting adapter

2938235

<https://www.phoenixcontact.com/us/products/2938235>



Universal wall adapter for securely mounting the device in the event of strong vibrations. The device is screwed directly onto the mounting surface. The universal wall adapter is attached on the top/bottom.

---

### UTA 107 - DIN rail adapter

2853983

<https://www.phoenixcontact.com/us/products/2853983>



Universal DIN rail adapter, for screwing on switchgear

# QUINT-PS-100-240AC/48DC/20 - Power supply unit

2938976

<https://www.phoenixcontact.com/us/products/2938976>



## PLT-SEC-T3-230-FM-UT - Type 3 surge protection device

2907919

<https://www.phoenixcontact.com/us/products/2907919>



Type 2/3 surge protection, consisting of protective plug and base element with screw connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage: 230 V AC/DC

---

## PLT-SEC-T3-60-FM-UT - Type 3 surge protection device

2907917

<https://www.phoenixcontact.com/us/products/2907917>



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 60 V AC/DC

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)