

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996
<https://www.phoenixcontact.com/us/products/2963996>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency stop and safety door monitoring up to SIL 3 or Cat. 4, PL e in accordance with EN ISO 13849, single- or two-channel operation, 8 enabling current paths, $U_S = 24\text{ V DC}$, pluggable Push-in terminal block

Your advantages

- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061, SIL 3 in accordance with IEC 61508
- Manually monitored and automatic activation in a single device
- 1- and 2-channel control
- 8 enabling current paths, 1 signaling current path

Commercial data

Item number	2963996
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN01
Product key	DNA114
Catalog page	Page 229 (C-6-2019)
GTIN	4017918904814
Weight per piece (including packing)	420.34 g
Weight per piece (excluding packing)	334.92 g
Customs tariff number	85371098
Country of origin	DE

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

Technical data

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Product properties

Product type	Safety relays
Product family	PSRclassic
Application	Emergency stop
	Safety door
Mechanical service life	approx. 10^7 cycles
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

Data management status

Article revision	15
------------------	----

Electrical properties

Maximum power dissipation for nominal condition	31.7 W ($U_S = 26.4$ V, $I_L^2 = 144$ A ² , $P_{Total\ max} = 2.9$ W + 28.8 W)
Nominal operating mode	100% operating factor

Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V
Rated surge voltage/insulation	Basic insulation 4 kV: between all current paths and housing Safe isolation, reinforced insulation 6 kV: between A1/A2 and 63/64, 73/74, 83/84 between S10/S11/S12/S33/S34/S35 and 63/64, 73/74, 83/84 between 63/64, 73/74, 83/84 among one another

Input data

General

Rated control circuit supply voltage U_S	24 V DC -15 % / +10 %
Power consumption at U_S	typ. 2.4 W (DC)
Rated control supply current I_S	typ. 100 mA DC (at U_S)
Inrush current	3.5 A ($\Delta t = 2$ ms at U_S) max. 150 mA ($\Delta t = 1$ ms, with U_S/I_x at S10) max. 200 mA ($\Delta t = 1$ ms, with U_S/I_x at S12) max. -180 mA ($\Delta t = 1$ ms, with U_S/I_x at S22) < 10 mA (with U_S/I_x to S34) < 10 mA (with U_S/I_x to S35)
Current consumption	50 mA (with U_S/I_x to S10) 50 mA (with U_S/I_x to S12) -50 mA (with U_S/I_x to S22)

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

	0 mA (with U_s/I_x to S34)
	1 mA (with U_s/I_x to S35)
Voltage at input/start and feedback circuit	24 V DC -15 % / +10 %
Filter time	2 ms (at A1 in the event of voltage dips at U_s)
	max. 1.5 ms (at S10, S12; test pulse width)
	7.5 ms (at S10, S12; test pulse rate)
	Test pulse rate = 5 x Test pulse width
Typical response time	< 120 ms (automatic start)
	< 140 ms (manual start)
Typ. starting time with U_s	< 200 ms (when controlled via A1)
Typical release time	< 20 ms (when controlled via S11/S12 and S21/S22)
	< 50 ms (when controlled via A1)
Concurrence	∞
Recovery time	< 500 ms (following demand of the safety function)
	< 1 s (Boot time)
Maximum switching frequency	0.5 Hz
Protective circuit	Surge protection; Suppressor diode
Max. permissible overall conductor resistance	11 Ω (Input sensor circuit S10,S12,S22)
	50 Ω (S34,S35 start circuit input)
Operating voltage display	1 x green LED
Status display	2 x LED (green)

Output data

Contact switching type	8 enabling current paths
	1 signaling current path
Contact material	AgSnO ₂
Maximum switching voltage	250 V AC
Minimum switching voltage	5 V AC/DC
Limiting continuous current	6 A
Maximum inrush current	6 A
Inrush current, minimum	10 mA
Sq. Total current	144 A ² (Enabling current paths)
	36 A ² (Signaling current path)
Switching capacity min.	50 mW
Switching capacity in accordance with IEC 60947-5-1	5 A (DC13)
	3 A (AC15)
	0.5 A (AC15)
Output fuse	10 A gL/gG (Enabling current paths)
	6 A gL/gG (Signaling current path)

Connection data

Connection technology

pluggable	yes
-----------	-----

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

Conductor connection

Connection method	Push-in connection
Conductor cross section rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm ² ... 1.5 mm ² (only together with CRIMPFOX 6)
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ² (only together with CRIMPFOX 6)
Conductor cross-section AWG	24 ... 16
Stripping length	8 mm

Dimensions

Width	45 mm
Height	112 mm
Depth	114.5 mm

Material specifications

Color (Housing)	yellow (RAL 1018)
Housing material	Polyamide

Characteristics

Safety data

Stop category	0
---------------	---

Safety data: EN ISO 13849

Category	4
Performance level (PL)	e (3 A DC13; 3 A AC15; 8760 switching cycles/year)

Safety data: IEC 61508 - High demand

Safety Integrity Level (SIL)	3
------------------------------	---

Safety data: IEC 61508 - Low demand

Safety Integrity Level (SIL)	3
------------------------------	---

Safety data: EN IEC 62061

Safety Integrity Level (SIL)	3
------------------------------	---

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-20 °C ... 55 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

Shock	15g
Vibration (operation)	10 Hz ... 150 Hz, 2g

Approvals

CE

Certificate	CE-compliant
-------------	--------------

Standards and regulations

Air clearances and creepage distances between the power circuits

Standards/regulations	DIN EN 60947-1
-----------------------	----------------

Mounting

Mounting type	DIN rail mounting
Assembly note	See derating curve
Mounting position	vertical or horizontal

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays




2963996

<https://www.phoenixcontact.com/us/products/2963996>

Drawings

Circuit diagram

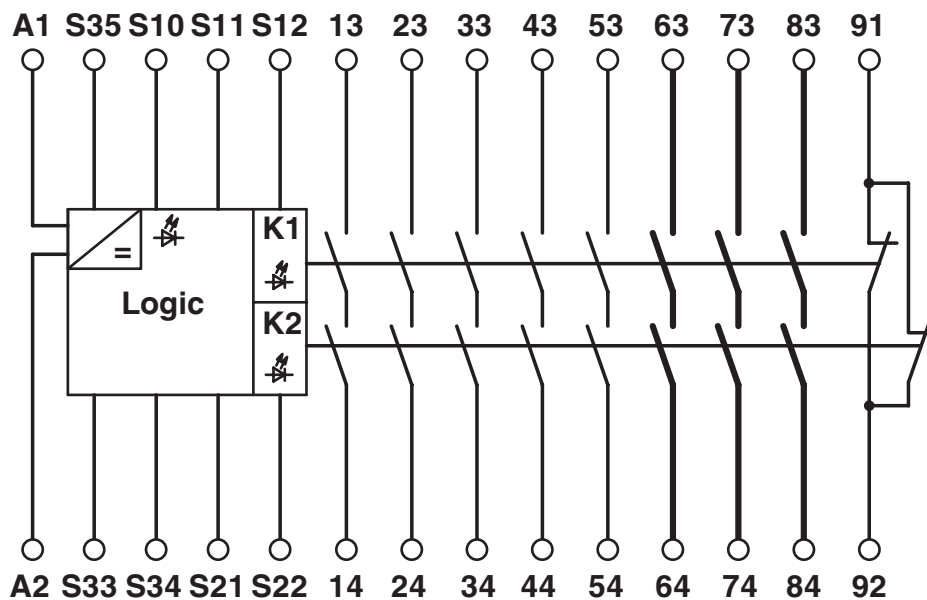

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2963996>



EAC

Approval ID: TR_TS_D_00573_c



Functional Safety

Approval ID: 01/205/5363.03/22



Functional Safety

Approval ID: 968/EZ 622.03/22



cULus Listed

Approval ID: E140324

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

Classifications

ECLASS

ECLASS-11.0	27371819
ECLASS-13.0	27371819
ECLASS-12.0	27371819

ETIM

ETIM 9.0	EC001449
----------	----------

UNSPSC

UNSPSC 21.0	39122200
-------------	----------

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	01173c64-6e5f-4621-878f-998922d82156

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

Accessories

CP-MSTB - Coding profile

1734634

<https://www.phoenixcontact.com/us/products/1734634>

Coding profile, is inserted into the slot on the plug or inverted header, red insulating material



CR-MSTB - Coding section

1734401

<https://www.phoenixcontact.com/us/products/1734401>

Coding section, inserted into the recess in the header or the inverted plug, red insulating material



PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/us/products/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6.0 mm², lateral entry, trapezoidal crimp

PSR-ESS-M0-H110 - Actuator

1221757

<https://www.phoenixcontact.com/us/products/1221757>



Actuator with anti-lock collar for modular emergency stop switches, for combination with module holder and contact module as a functional unit, panel installation, bayonet lock

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

PSR-ESS-ACC-CB1-C3 - Module holder

1221747

<https://www.phoenixcontact.com/us/products/1221747>



Module holder for modular emergency stop switches, connects the contact block and actuator with bayonet lock, suitable for 3 elements

PSR-ESS-ACC-CB1-NC-SC - Contact module

1221752

<https://www.phoenixcontact.com/us/products/1221752>



Contact module for modular emergency stop switches with force-guided N/C contact for safety-related shutdown, in conjunction with appropriate evaluation unit suitable for use up to PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061)

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com