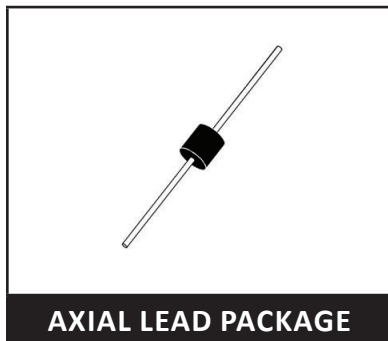


5kW POWER TVS COMPONENT**DESCRIPTION**

The 5KPxxA/CA Series, are discrete 5,000 Watt, silicon transient voltage suppressors (TVS) designed for use in applications where large voltage transients can permanently damage voltage sensitive components and equipment.

The 5KPxxA/CA series is available in multiple voltages and is compatible with IEC 61000-4-5 (Surge) requirements.

FEATURES

- Compatible with IEC 61000-4-5 (Surge): 48A, 8/20 μ s - L3(Line-Ground), L4(Line-Line) & L1 (Power)
- 5,000 Watts Peak Pulse Power per Line ($t_p = 10/1000\mu$ s)
- Unidirectional and Bidirectional Configurations
- Easy Mounting to Printed Circuit Board
- tClamping (0V to V_{BR} Min.) $< 1 \times 10^{-12}$ seconds theoretical
- Available in Multiple Voltages
- RoHS Complaint (Exemption #7)

APPLICATIONS

- Relay Drives
- Motor (Start/Stop) Back EMF Protection
- Module Lightning Protection
- Secondary Lightning Protection for AC/DC

MECHANICAL CHARACTERISTICS

- Molded Case
- Approximate Weight: 5 grams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- Flammability Rating UL 94V-0

CIRCUIT DIAGRAMS**UNIDIRECTIONAL****BIDIRECTIONAL**

TYPICAL DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power (tp = 10/1000μs) - See Figure 1	P _{PP}	5,000	Watts
Forward Surge Rating - 1/120 seconds - See Note 2	I _F	500	Amps
Steady State Power Dissipation	P _P	8.0	Watts
Storage Temperature	T _{STG}	-55 to 150	°C
Operating Temperature	T _L	-55 to 150	°C
Typical Thermal Resistance - Junction to Lead	R _{UJL}	8.0	°C/W
Typical Thermal Resistance - Junction to Ambient	R _{UJA}	40.0	°C/W

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (Note 1)	RATED STAND-OFF VOLTAGE V _{WM} VOLTS	BREAKDOWN VOLTAGE		MAXIMUM LEAKAGE CURRENT @V _{WM} I _D μA	MAXIMUM CLAMPING VOLTAGE (Fig. 2) 10/1000μs @ I _{PP} VOLTS	MAXIMUM REVERSE SURGE CURRENT @ I _{PP} AMPS
		MIN V _(BR) VOLTS	@ I _T mA			
5KP5.0A	5.0	6.4	50	5000	9.2	543
5KP6.0A	6.0	6.67	50	5000	10.3	485
5KP6.5A	6.5	7.22	50	2000	11.2	446
5KP7.0A	7.0	7.78	50	1000	12.0	417
5KP7.5A	7.5	8.33	5	250	12.9	388
5KP8.0A	8.0	8.89	5	150	13.6	368
5KP8.5A	8.5	9.44	5	50	14.4	347
5KP9.0A	9.0	10.0	5	20	15.4	325
5KP10A	10.0	11.1	5	15	17.0	294
5KP11A	11.0	12.2	5	2	18.2	275
5KP12A	12.0	13.3	5	2	19.9	251
5KP13A	13.0	14.4	5	2	21.5	233
5KP14A	14.0	15.6	5	2	23.2	216
5KP15A	15.0	16.7	5	2	24.4	205
5KP16A	16.0	17.8	5	2	26.0	192
5KP17A	17.0	18.9	5	2	27.6	181
5KP18A	18.0	20.0	5	2	29.2	171
5KP19A	19.0	21.13	5	2	30.8	162
5KP20A	20.0	22.2	5	2	32.4	154
5KP22A	22.0	24.4	5	2	35.5	141
5KP24A	24.0	26.7	5	2	38.9	129
5KP26A	26.0	28.9	5	2	42.1	119
5KP28A	28.0	31.1	5	2	45.4	110
5KP30A	30.0	33.3	5	2	48.4	103


TYPICAL DEVICE CHARACTERISTICS
ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (Note 1)	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	BREAKDOWN VOLTAGE		MAXIMUM LEAKAGE CURRENT $@V_{WM}$ I_D μA	MAXIMUM CLAMPING VOLTAGE (Fig. 2) $@ I_{PP}$ VOLTS	MAXIMUM REVERSE SURGE CURRENT $@ I_{PP}$ AMPS
		MIN $V_{(BR)}$ VOLTS	$@I_T$ mA			
5KP33A	33.0	36.7	5	2	53.3	93.8
5KP36A	36.0	40.0	5	2	58.1	86.1
5KP40A	40.0	44.4	5	2	64.5	77.5
5KP43A	43.0	47.8	5	2	69.4	72.1
5KP45A	45.0	50.0	5	2	72.7	68.8
5KP48A	48.0	53.3	5	2	77.4	64.6
5KP51A	51.0	56.7	5	2	82.4	60.7
5KP54A	54.0	60.0	5	2	87.1	57.4
5KP58A	58.0	64.4	5	2	93.6	53.4
5KP60A	60.0	66.7	5	2	96.8	51.7
5KP64A	64.0	71.1	5	2	103.0	48.5
5KP70A	70.0	77.8	5	2	113.0	44.3
5KP75A	75.0	83.3	5	2	121.0	41.3
5KP78A	78.0	86.7	5	2	126.0	40.0
5KP80A	80.0	88.8	5	2	129.6	38.6
5KP85A	85.0	94.4	5	2	137.0	36.5
5KP90A	90.0	100.0	5	2	146.0	34.3
5KP100A	100.0	111.0	5	2	162.0	30.9
5KP110A	110.0	122.0	5	2	177.0	28.3
5KP120A	120.0	133.0	5	2	193.0	25.9
5KP130A	130.0	144.0	5	2	209.0	23.9
5KP140A	140.0	155.0	5	2	226.8	22.1
5KP150A	150.0	167.0	5	2	243.0	20.1
5KP160A	160.0	178.0	5	2	259.0	19.3
5KP170A	170.0	189.0	5	2	275.0	18.2
5KP180A	180.0	200.0	5	2	291.6	17.2
5KP190A	190.0	211.0	5	2	307.8	16.2
5KP200A	200.0	224.0	5	2	324.0	15.4
5KP210A	210.0	233.0	5	2	349.5	14.3
5KP220A	220.0	246.0	5	2	356.0	14.0
5KP250A	250.0	279.0	5	2	405.0	12.4
5KP300A	300.0	335.0	5	2	486.0	10.3

TYPICAL DEVICE CHARACTERISTICS

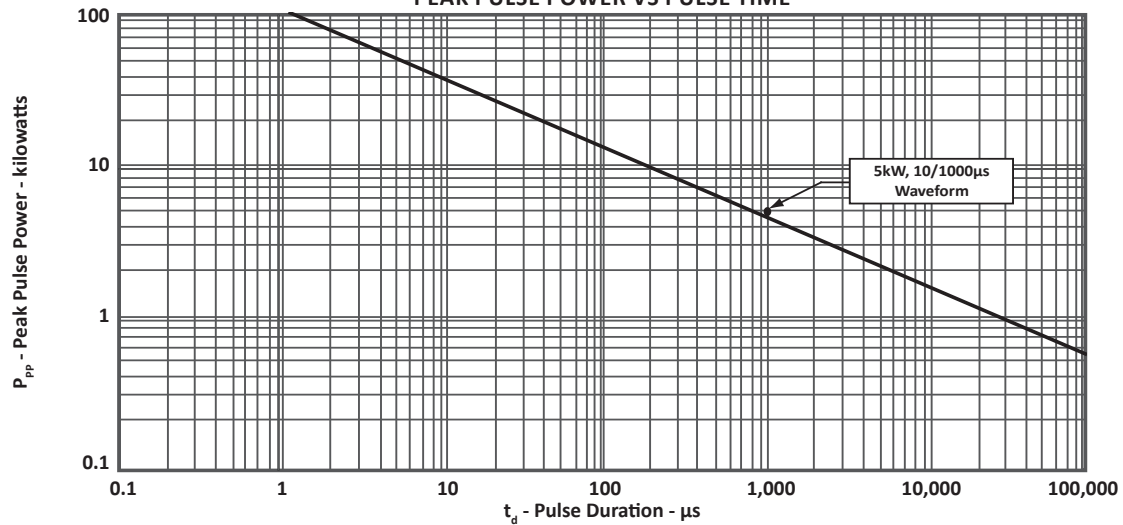
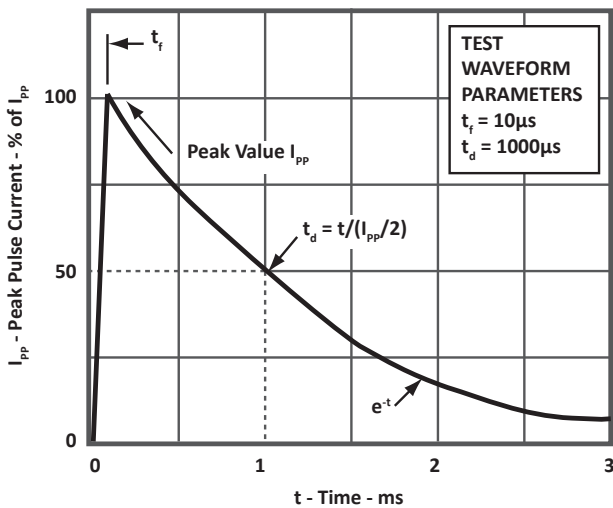
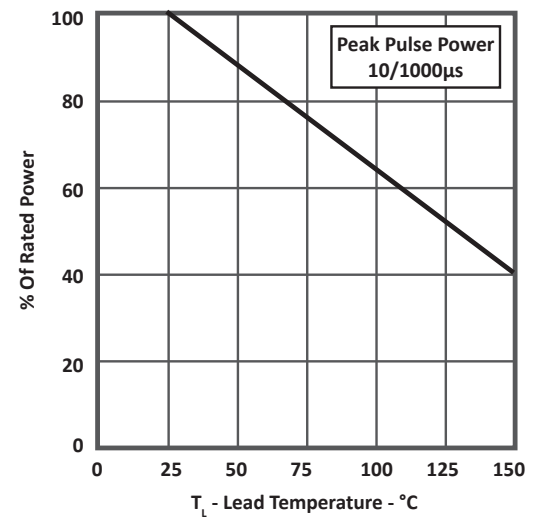
ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (Note 1)	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	BREAKDOWN VOLTAGE		MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA	MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ I_{PP} VOLTS	MAXIMUM REVERSE SURGE CURRENT @ I_{PP} AMPS
		MIN $V_{(BR)}$ VOLTS	@ I_T mA			
5KP350A	350.0	391.0	5	2	567.0	8.8
5KP400A	400.0	447.0	5	2	648.0	7.7
5KP440A	440.0	492.0	5	2	713.0	7.0

NOTES

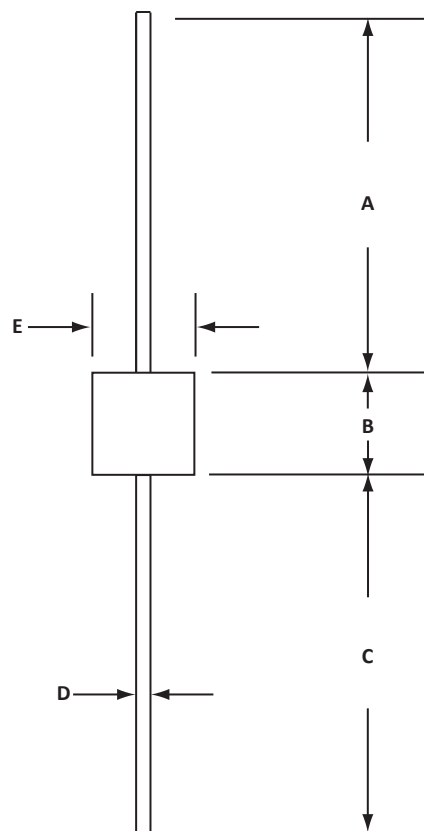
1. Part numbers shown are unidirectional devices. Add a "CA" suffix to specify bidirectional devices, such as 5KP20CA.

TYPICAL DEVICE CHARACTERISTICS

 FIGURE 1
 PEAK PULSE POWER VS PULSE TIME

 FIGURE 2
 PULSE WAVEFORM

 FIGURE 3
 POWER DERATING CURVE


AXIAL LEAD PACKAGE INFORMATION

OUTLINE DIMENSIONS				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	24.5	-	1.00	-
B	8.64	9.14	0.34	0.36
C	24.5	-	1.00	-
D	1.22 DIA.	1.32 DIA.	0.048 DIA.	0.052 DIA.
E	8.64	9.14	0.34	0.36
NOTES 1. Dimensions are exclusive of mold flash and metal burrs.				



ORDERING INFORMATION					
BASE PART NUMBER (xx = Voltage)	LEADFREE SUFFIX	TAPE SUFFIX	QTY/REEL	REEL SIZE	TUBE QTY
5KPxxA	-LF	-T13	800	13"	250
5KPxxCA	-LF	-T13	800	13"	250
NOTES 1. Marking on Part - logo, part number, date code and positive terminal marked with band(unidirectional only). 2. Parts come in bulk quantities unless otherwise requested. 3. 250 piece minimum order quantity for bulk units and must be divisible by 250.			MARKING DIAGRAM		

COMPANY INFORMATION

COMPANY PROFILE

In business more than 30 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection that include Transient Voltage Suppressor (TVS) Arrays, Steering Diode Array Hybrids, High-power Components and Modules, as well as Steering Diodes, EMI Filter/TVS Arrays and Thyristor Surge Suppressors. These components deliver circuit protection in electronic systems from numerous overvoltage events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices is an ISO 9001 certified company.

CONTACT US

Corporate Headquarters

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Asia Sales: asiasales@protekdevices.com
Europe Sales: europesales@protekdevices.com
U.S. Sales: ussales@protekdevices.com
Distributor Sales: distysales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19
Zervex
Singapore - 408538
Tel: +65-67488312
Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2015 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.