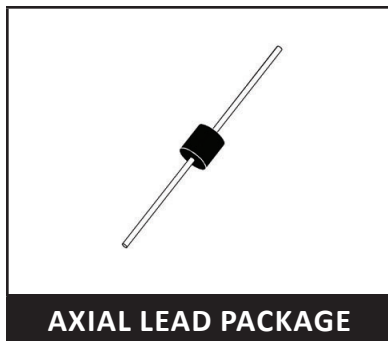


600 WATT TVS COMPONENT**DESCRIPTION**

The P6KE Series, are discrete 600 Watt, silicon transient voltage suppressors (TVS) designed for use in applications where large voltage transients can permanently damage voltage sensitive components and equipment.

The P6KE series is available in multiple voltages and is compatible with IEC 61000-4-5 (Surge) requirements.

FEATURES

- UL Registered
- Compatible with IEC 61000-4-5 (Surge)
- 600 Watts Peak Pulse Power per Line ($t_p = 10/1000\mu s$)
- Unidirectional and Bidirectional Configurations
- Low Leakage
- Excellent Clamping Capability
- Glass Passivated Chip
- Very Fast Response Time
- Easy Mounting to Printed Circuit Board
- Available in Multiple Voltages
- RoHS Complaint (Exemption #7)

APPLICATIONS

- DC & AC Applications
- Remote Transmission Lines
- Industrial Wiring

MECHANICAL CHARACTERISTICS

- Molded Case
- Approximate Weight: 0.38 grams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- Flammability Rating UL 94V-0

TYPICAL DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Operating Temperature	T_A	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C
Peak Pulse Power ($t_p = 10/1000\mu s$) - See Figure 1 and Note 2	P_{PP}	600	Watts
Power Dissipation on Infinite Heatsink at $T_L = 75^\circ C$	P_D	5.0	Watts
Peak Forward Surge Current, 8.3ms single half sinewave - Unidirectional Only (Note 2)	I_{FSM}	100	Amps
Maximum Instantaneous Forward Voltage at 100A - Unidirectional Only (Note 3)	V_F	3.5/5.0	V

NOTE

1. Non-repetitive current pulse per Figure 2 and derated above $T_A = 25^\circ C$ per Figure 2.
2. Measured on 8.3ms single half sinewave or equivalent square wave, duty cycle = 4 pulses per minute maximum.
3. $V_F < 3.5V$ for devices of $V_{BR} < 200V$ and $V_F < 5.0V$ for devices of $V_{BR} > 201V$.

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (SEE NOTE 1)	REVERSE STAND-OFF VOLTAGE V_{RWM} VOLTS	BREAKDOWN VOLTAGE $V_{(BR)} @ I_T$ VOLTS		TEST CURRENT $@ I_T$ mA	MAXIMUM CLAMPING VOLTAGE (Fig. 2) $@ I_P$ V_C VOLTS	MAXIMUM REVERSE SURGE CURRENT $@ I_{PP}$ AMPS	MAXIMUM REVERSE LEAKAGE CURRENT $@ V_{RWM}$ I_R μA
		MIN	MAX				
P6KE6.8A	5.8	6.46	7.14	10	10.5	57.1	1000
P6KE7.5A	6.4	7.13	7.88	10	11.3	53.1	500
P6KE8.2A	7.0	7.79	8.61	10	12.1	49.6	200
P6KE9.1A	7.8	8.65	9.56	1	13.4	44.8	50
P6KE10A	8.6	9.50	10.50	1	14.5	41.4	10
P6KE11A	9.4	10.45	11.55	1	15.6	38.5	5
P6KE12A	10.2	11.40	12.60	1	16.7	35.9	5
P6KE13A	11.1	12.35	13.65	1	18.2	33.0	1
P6KE15A	12.8	14.25	15.75	1	21.2	28.3	1
P6KE16A	13.6	15.20	16.80	1	22.5	26.7	1
P6KE18A	15.3	17.10	18.90	1	25.2	23.8	1
P6KE20A	17.1	19.00	21.00	1	27.7	21.7	1
P6KE22A	18.8	20.90	23.10	1	30.6	19.6	1
P6KE24A	20.5	22.80	25.20	1	33.2	18.1	1
P6KE27A	23.1	25.65	28.35	1	37.5	16.0	1
P6KE30A	25.6	28.50	31.50	1	41.4	14.5	1
P6KE33A	28.2	31.35	34.65	1	45.7	13.1	1
P6KE36A	30.8	34.20	37.80	1	49.9	12.0	1
P6KE39A	33.3	37.05	40.95	1	53.9	11.1	1
P6KE43A	36.8	40.85	45.15	1	59.3	10.1	1
P6KE47A	40.2	44.65	49.35	1	64.8	9.3	1
P6KE51A	43.6	48.45	53.55	1	70.1	8.6	1

TYPICAL DEVICE CHARACTERISTICS

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (SEE NOTE 1)	REVERSE STAND-OFF VOLTAGE V_{RWM} VOLTS	BREAKDOWN VOLTAGE $V_{(BR)} @ I_T$ VOLTS		TEST CURRENT $@ I_T$ mA	MAXIMUM CLAMPING VOLTAGE (Fig. 2) $@ I_P$ V_C VOLTS	MAXIMUM REVERSE SURGE CURRENT $@ I_{PP}$ AMPS	MAXIMUM REVERSE LEAKAGE CURRENT $@ V_{RWM}$ I_R μA
		MIN	MAX				
P6KE56A	47.8	53.20	58.80	1	77.0	7.8	1
P6KE62A	53.0	58.90	65.10	1	85.0	7.1	1
P6KE68A	58.1	64.60	71.40	1	92.0	6.5	1
P6KE75A	64.1	71.25	78.75	1	103.0	5.8	1
P6KE82A	70.1	77.90	86.10	1	113.0	5.3	1
P6KE91A	77.8	86.45	95.55	1	125.0	4.8	1
P6KE100A	85.5	95.00	105.00	1	137.0	4.4	1
P6KE110A	94.0	104.50	115.50	1	152.0	4.0	1
P6KE120A	102.0	114.00	126.00	1	165.0	3.6	1
P6KE130A	111.0	123.50	136.50	1	179.0	3.4	1
P6KE150A	128.0	142.50	157.50	1	207.0	2.9	1
P6KE160A	136.0	152.00	168.00	1	219.0	2.7	1
P6KE170A	145.0	161.50	178.50	1	234.0	2.6	1
P6KE180A	154.0	171.00	189.00	1	246.0	2.4	1
P6KE200A	171.0	190.00	210.00	1	274.0	2.2	1
P6KE220A	185.0	209.00	231.00	1	328.0	1.8	1
P6KE250A	214.0	237.50	262.50	1	344.0	1.7	1
P6KE300A	256.0	285.00	315.00	1	414.0	1.5	1
P6KE350A	299.3	332.50	367.50	1	482.0	1.2	1
P6KE380A	324.9	361.00	399.00	1	524.4	1.1	1
P6KE400A	342.0	380.00	420.00	1	548.0	1.1	1
P6KE440A	376.2	418.00	462.00	1	607.0	1.0	1
P6KE480A	408.0	456.0	504.00	1	658.0	0.9	1
P6KE500A	427.5	475.00	525.00	1	690.0	0.9	1
P6KE520A	444.6	494.00	546.00	1	717.6	0.8	1
P6KE550A	470.3	522.50	577.50	1	759.0	0.8	1
P6KE600A	513.0	570.00	630.00	1	828.0	0.7	1

NOTE

1. Add suffix 'CA' after part number to specify a bidirectional device.

TYPICAL DEVICE CHARACTERISTICS

FIGURE 1
PEAK PULSE POWER VS PULSE TIME

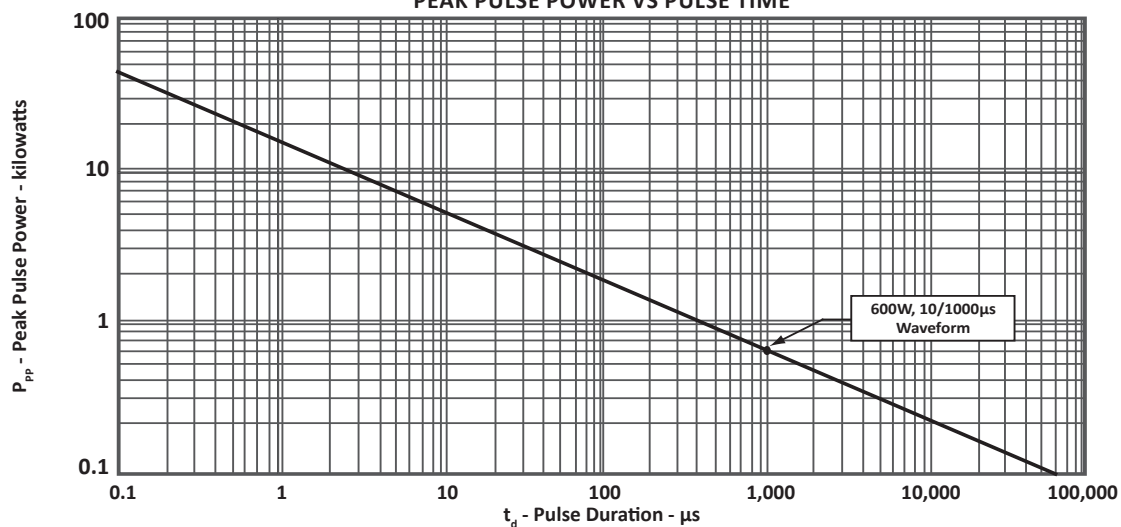


FIGURE 2
PULSE WAVEFORM





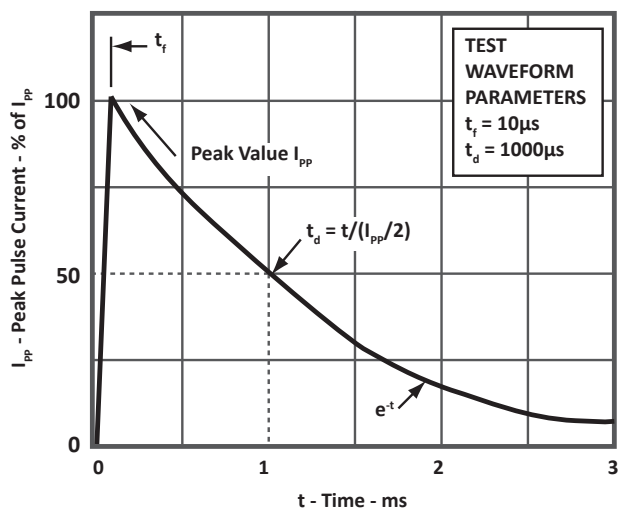


FIGURE 3
POWER DERATING CURVE

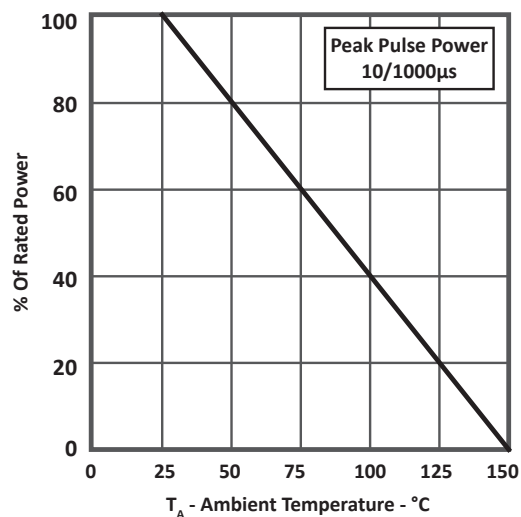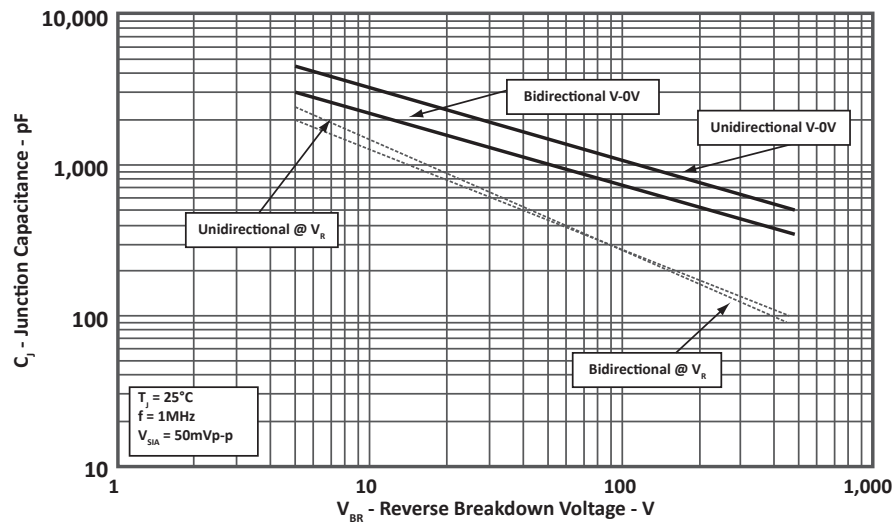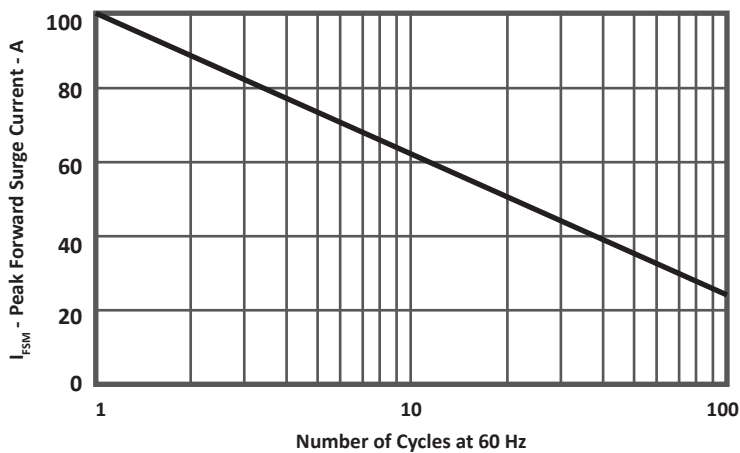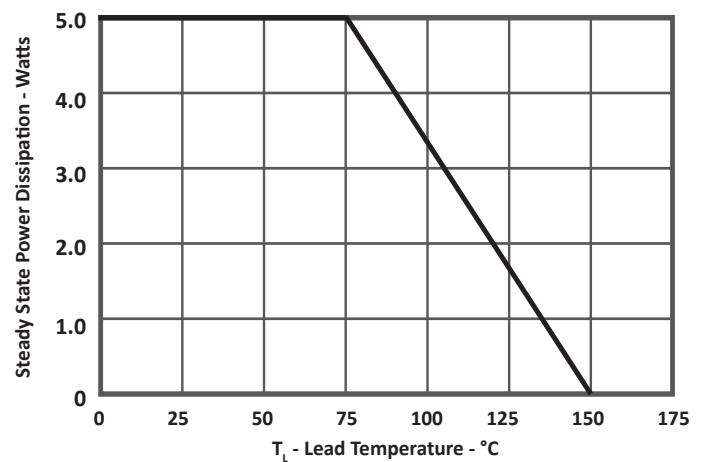

TYPICAL DEVICE CHARACTERISTICS

 FIGURE 4
 TYPICAL JUNCTION CAPACITANCE

 FIGURE 5
 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

 FIGURE 6
 STEADY STATE POWER DERATING CURVE


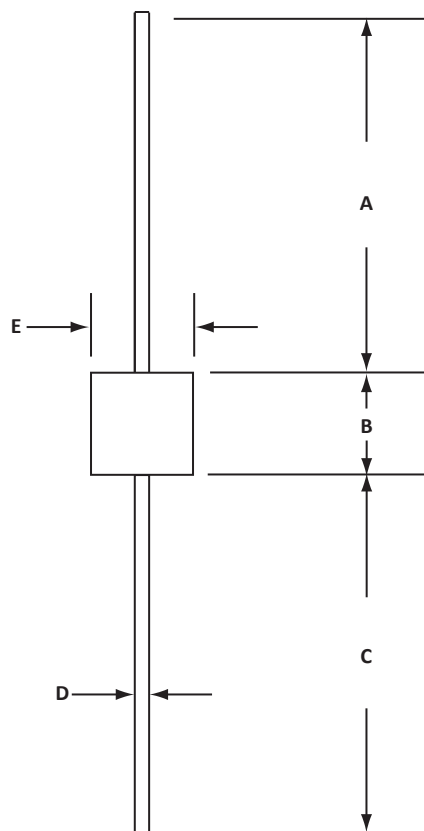
AXIAL LEAD PACKAGE INFORMATION

OUTLINE DIMENSIONS


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	25.4	-	1.00	-
B	5.85	7.63	0.230	0.300
C	25.4	-	1.00	-
D	0.71 DIA.	0.84 DIA.	0.028 DIA.	0.033 DIA.
E	2.60	3.61	0.102	0.142

NOTES

1. Dimensions are exclusive of mold flash and metal burrs.



TAPE AND REEL

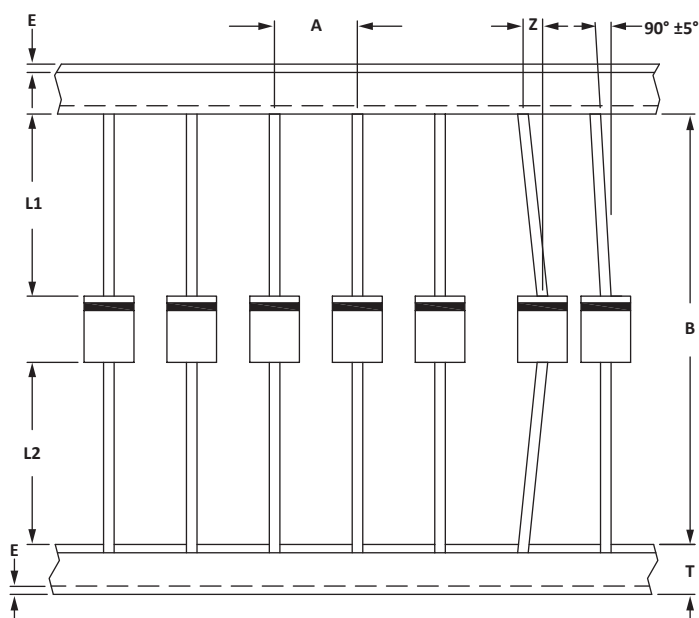

SPECIFICATIONS

REEL DIA.	A	B	E _{MAX}	L1	L2	T	Z _{MAX}
330mm (13")	5.0 ± 0.5	52.0 ± 0.5	3.00	22.6 ± 0.5	22.6 ± 0.5	6.0 ± 0.4	1.20

NOTES

1. Dimensions are in millimeters.
2. Axial lead product is taped and reeled in accordance with RS-296-E.
3. Marking on Part - part number, logo and polarity band (Unidirectional Only).

ORDERING INFORMATION

BASE PART NUMBER (xx = Voltage)	LEADFREE SUFFIX	TAPE SUFFIX	QTY/REEL	REEL SIZE	TUBE QTY
P6KExxA	N/A	-T13	4,000	13"	n/a
P6KExxCA	N/A	-T13	4,000	13"	n/a

COMPANY INFORMATION

COMPANY PROFILE

In business more than 25 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is an ISO 9001 certified company.

CONTACT US

Corporate Headquarters

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Asia Sales: asiasales@protekdevices.com
Europe Sales: europesales@protekdevices.com
U.S. Sales: ussales@protekdevices.com
Distributor Sales: distysales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19
Zervex
Singapore - 408538
Tel: +65-67488312
Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2014 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.