



**SEMITRANS® 2**

## Fast IGBT4 Modules

### SKM50GB12T4

#### Features


- IGBT4 = 4. generation fast trench IGBT (Infineon)
- CAL4 = Soft switching 4. generation CAL-diode
- Isolated copper baseplate using DBC technology (Direct Bonded Copper)
- Increased power cycling capability
- With integrated gate resistor
- For higher switching frequencies up to 20kHz
- UL recognized, file no. E63532

#### Typical Applications\*

- AC inverter drives
- UPS
- Electronic welders at fsw up to 20 kHz

#### Remarks

- Case temperature limited to  $T_c = 125^\circ\text{C}$  max.
- Recommended  $T_{op} = -40 \dots +150^\circ\text{C}$
- Product reliability results valid for  $T_j = 150^\circ\text{C}$



**GB**

#### Absolute Maximum Ratings

| Symbol              | Conditions                                                                     |                         | Values      | Unit |
|---------------------|--------------------------------------------------------------------------------|-------------------------|-------------|------|
| IGBT                |                                                                                |                         |             |      |
| V <sub>CES</sub>    | T <sub>j</sub> = 25 °C                                                         |                         | 1200        | V    |
| I <sub>C</sub>      | T <sub>j</sub> = 175 °C                                                        | T <sub>c</sub> = 25 °C  | 81          | A    |
|                     |                                                                                | T <sub>c</sub> = 80 °C  | 62          | A    |
| I <sub>Cnom</sub>   |                                                                                |                         | 50          | A    |
| I <sub>CRM</sub>    | I <sub>CRM</sub> = 3xI <sub>Cnom</sub>                                         |                         | 150         | A    |
| V <sub>GES</sub>    |                                                                                |                         | -20 ... 20  | V    |
| t <sub>psc</sub>    | V <sub>CC</sub> = 800 V<br>V <sub>GE</sub> ≤ 15 V<br>V <sub>CES</sub> ≤ 1200 V | T <sub>j</sub> = 150 °C | 10          | μs   |
| T <sub>j</sub>      |                                                                                |                         | -40 ... 175 | °C   |
| Inverse diode       |                                                                                |                         |             |      |
| I <sub>F</sub>      | T <sub>j</sub> = 175 °C                                                        | T <sub>c</sub> = 25 °C  | 65          | A    |
|                     |                                                                                | T <sub>c</sub> = 80 °C  | 49          | A    |
| I <sub>Fnom</sub>   |                                                                                |                         | 50          | A    |
| I <sub>FRM</sub>    | I <sub>FRM</sub> = 3xI <sub>Fnom</sub>                                         |                         | 150         | A    |
| I <sub>FSM</sub>    | t <sub>p</sub> = 10 ms, sin 180°, T <sub>j</sub> = 25 °C                       |                         | 270         | A    |
| T <sub>j</sub>      |                                                                                |                         | -40 ... 175 | °C   |
| Module              |                                                                                |                         |             |      |
| I <sub>t(RMS)</sub> | T <sub>terminal</sub> = 80 °C                                                  |                         | 200         | A    |
| T <sub>stg</sub>    |                                                                                |                         | -40 ... 125 | °C   |
| V <sub>isol</sub>   | AC sinus 50 Hz, t = 1 min                                                      |                         | 4000        | V    |

#### Characteristics

| Symbol        | Conditions                                                                           | min.                      | typ.  | max.  | Unit             |
|---------------|--------------------------------------------------------------------------------------|---------------------------|-------|-------|------------------|
| <b>IGBT</b>   |                                                                                      |                           |       |       |                  |
| $V_{CE(sat)}$ | $I_C = 50\text{ A}$<br>$V_{GE} = 15\text{ V}$<br>chipelevel                          | $T_j = 25^\circ\text{C}$  | 1.85  | 2.10  | V                |
|               |                                                                                      | $T_j = 150^\circ\text{C}$ | 2.20  | 2.40  | V                |
| $V_{CE0}$     | chipelevel                                                                           | $T_j = 25^\circ\text{C}$  | 0.8   | 0.9   | V                |
|               |                                                                                      | $T_j = 150^\circ\text{C}$ | 0.7   | 0.8   | V                |
| $r_{CE}$      | $V_{GE} = 15\text{ V}$<br>chipelevel                                                 | $T_j = 25^\circ\text{C}$  | 21.00 | 24.00 | $\text{m}\Omega$ |
|               |                                                                                      | $T_j = 150^\circ\text{C}$ | 30.00 | 32.00 | $\text{m}\Omega$ |
| $V_{GE(th)}$  | $V_{GE} = V_{CE}, I_C = 1.7\text{ mA}$                                               | 5                         | 5.8   | 6.5   | V                |
| $I_{CES}$     | $V_{GE} = 0\text{ V}$<br>$V_{CE} = 1200\text{ V}$                                    | $T_j = 25^\circ\text{C}$  |       | 1     | mA               |
|               |                                                                                      | $T_j = 150^\circ\text{C}$ |       |       | mA               |
| $C_{ies}$     | $V_{CE} = 25\text{ V}$<br>$V_{GE} = 0\text{ V}$                                      | $f = 1\text{ MHz}$        | 2.77  |       | nF               |
| $C_{oes}$     |                                                                                      | $f = 1\text{ MHz}$        | 0.20  |       | nF               |
| $C_{res}$     |                                                                                      | $f = 1\text{ MHz}$        | 0.16  |       | nF               |
| $Q_G$         | $V_{GE} = -8\text{ V} \dots +15\text{ V}$                                            |                           | 280   |       | nC               |
| $R_{Gint}$    | $T_j = 25^\circ\text{C}$                                                             |                           | 4.0   |       | $\Omega$         |
| $t_{d(on)}$   | $V_{CC} = 600\text{ V}$                                                              | $T_j = 150^\circ\text{C}$ | 98    |       | ns               |
| $t_r$         | $I_C = 50\text{ A}$                                                                  | $T_j = 150^\circ\text{C}$ | 29    |       | ns               |
| $E_{on}$      | $V_{GE} = \pm 15\text{ V}$<br>$R_{Gon} = 8.2\text{ }\Omega$                          | $T_j = 150^\circ\text{C}$ | 5.5   |       | mJ               |
| $t_{d(off)}$  | $R_{Goff} = 8.2\text{ }\Omega$                                                       | $T_j = 150^\circ\text{C}$ | 325   |       | ns               |
| $t_f$         | $di/dt_{on} = 1700\text{ A}/\mu\text{s}$<br>$di/dt_{off} = 670\text{ A}/\mu\text{s}$ | $T_j = 150^\circ\text{C}$ | 75    |       | ns               |
| $E_{off}$     |                                                                                      | $T_j = 150^\circ\text{C}$ | 4.5   |       | mJ               |
| $R_{th(j-c)}$ | per IGBT                                                                             |                           |       | 0.53  | K/W              |



**SEMITRANS® 2**

## Fast IGBT4 Modules

### SKM50GB12T4

#### Features

- IGBT4 = 4. generation fast trench IGBT (Infineon)
- CAL4 = Soft switching 4. generation CAL-diode
- Isolated copper baseplate using DBC technology (Direct Bonded Copper)
- Increased power cycling capability
- With integrated gate resistor
- For higher switching frequencies up to 20kHz
- UL recognized, file no. E63532

#### Typical Applications\*


- AC inverter drives
- UPS
- Electronic welders at fsw up to 20 kHz

#### Remarks

- Case temperature limited to  $T_c = 125^\circ\text{C}$  max.
- Recommended  $T_{op} = -40 \dots +150^\circ\text{C}$
- Product reliability results valid for  $T_j = 150^\circ\text{C}$

#### Characteristics

| Symbol               | Conditions                                                              |                           | min. | typ. | max. | Unit          |
|----------------------|-------------------------------------------------------------------------|---------------------------|------|------|------|---------------|
| <b>Inverse diode</b> |                                                                         |                           |      |      |      |               |
| $V_F = V_{EC}$       | $I_F = 50\text{ A}$<br>$V_{GE} = 0\text{ V}$<br>chipllevel              | $T_j = 25^\circ\text{C}$  |      | 2.22 | 2.54 | V             |
|                      |                                                                         | $T_j = 150^\circ\text{C}$ |      | 2.18 | 2.50 | V             |
| $V_{F0}$             | chipllevel                                                              | $T_j = 25^\circ\text{C}$  |      | 1.3  | 1.5  | V             |
|                      |                                                                         | $T_j = 150^\circ\text{C}$ |      | 0.9  | 1.1  | V             |
| $r_F$                | chipllevel                                                              | $T_j = 25^\circ\text{C}$  |      | 18.4 | 20.8 | m $\Omega$    |
|                      |                                                                         | $T_j = 150^\circ\text{C}$ |      | 25.6 | 28.0 | m $\Omega$    |
| $I_{RRM}$            | $I_F = 50\text{ A}$                                                     | $T_j = 150^\circ\text{C}$ |      | 35   |      | A             |
| $Q_{rr}$             | $di/dt_{off} = 1380\text{ A}/\mu\text{s}$<br>$V_{GE} = \pm 15\text{ V}$ | $T_j = 150^\circ\text{C}$ |      | 8.7  |      | $\mu\text{C}$ |
| $E_{rr}$             | $V_{CC} = 600\text{ V}$                                                 | $T_j = 150^\circ\text{C}$ |      | 3.8  |      | mJ            |
| $R_{th(j-c)}$        | per diode                                                               |                           |      |      | 0.84 | K/W           |
| <b>Module</b>        |                                                                         |                           |      |      |      |               |
| $L_{CE}$             |                                                                         |                           |      |      | 30   | nH            |
| $R_{CC'+EE'}$        | terminal-chip                                                           | $T_c = 25^\circ\text{C}$  |      | 0.65 |      | m $\Omega$    |
|                      |                                                                         | $T_c = 125^\circ\text{C}$ |      | 1    |      | m $\Omega$    |
| $R_{th(c-s)}$        | per module                                                              |                           |      | 0.04 | 0.05 | K/W           |
| $M_s$                | to heat sink M6                                                         |                           | 3    |      | 5    | Nm            |
| $M_t$                |                                                                         | to terminals M5           | 2.5  |      | 5    | Nm            |
|                      |                                                                         |                           |      |      |      | Nm            |
| w                    |                                                                         |                           |      |      | 160  | g             |



**GB**

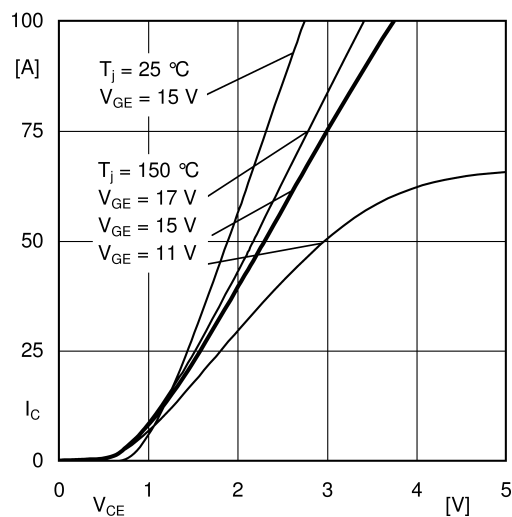


Fig. 1: Typ. output characteristic, inclusive  $R_{CC'} + E_{E'}$

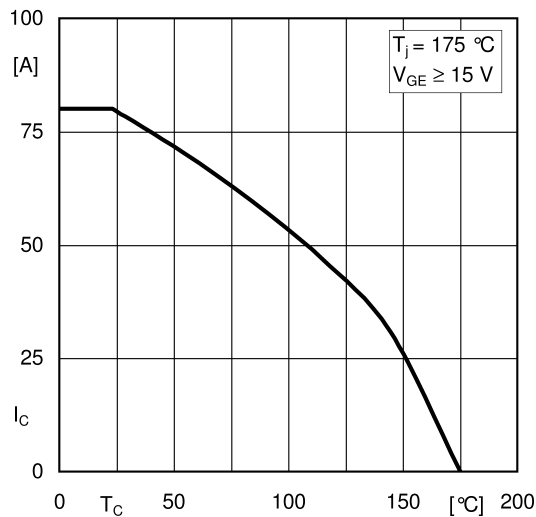


Fig. 2: Rated current vs. temperature  $I_C = f(T_C)$

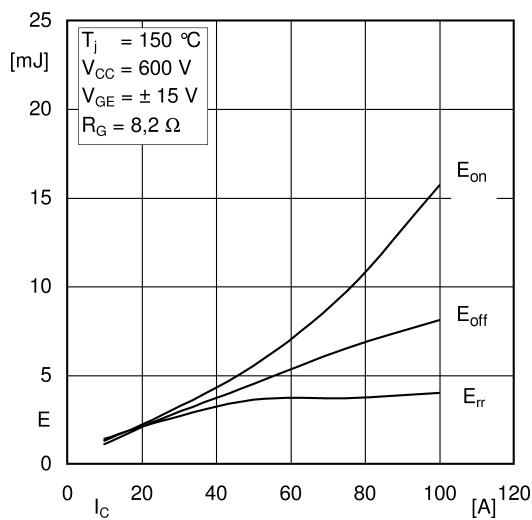


Fig. 3: Typ. turn-on /-off energy =  $f(I_C)$

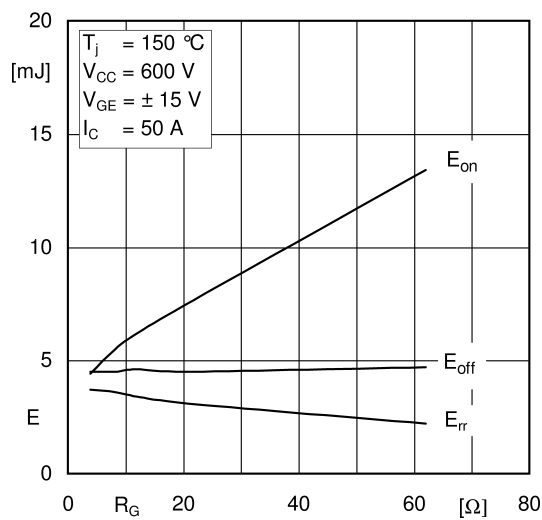


Fig. 4: Typ. turn-on /-off energy =  $f(R_G)$

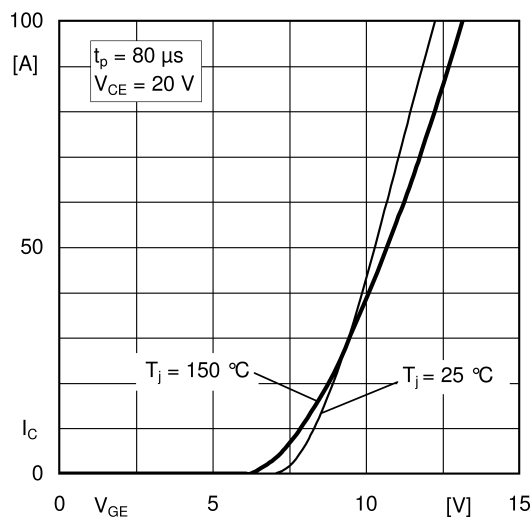


Fig. 5: Typ. transfer characteristic

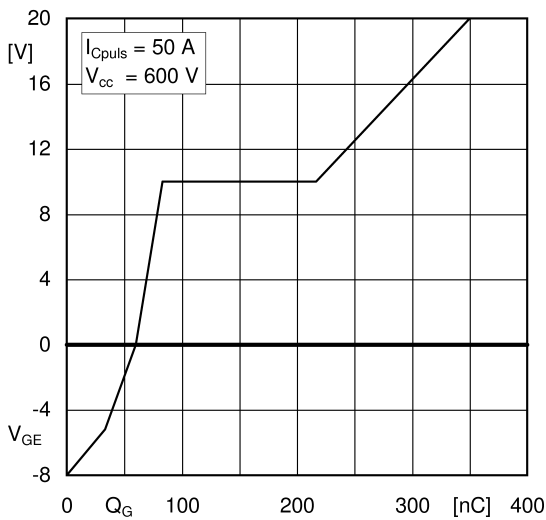


Fig. 6: Typ. gate charge characteristic

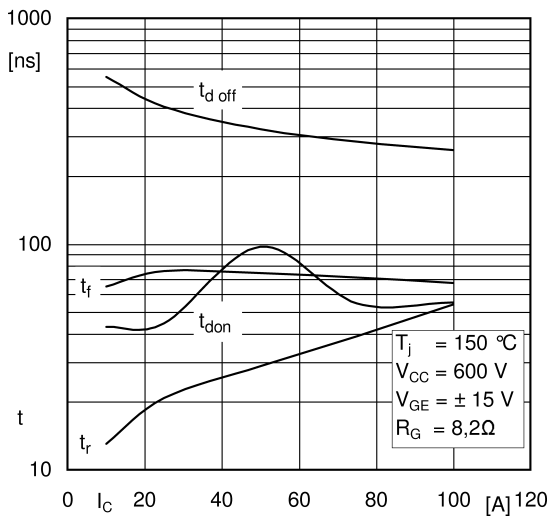


Fig. 7: Typ. switching times vs.  $I_C$

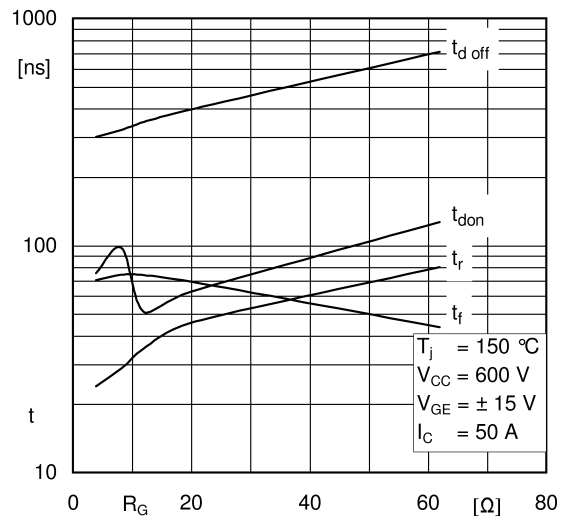


Fig. 8: Typ. switching times vs. gate resistor  $R_G$

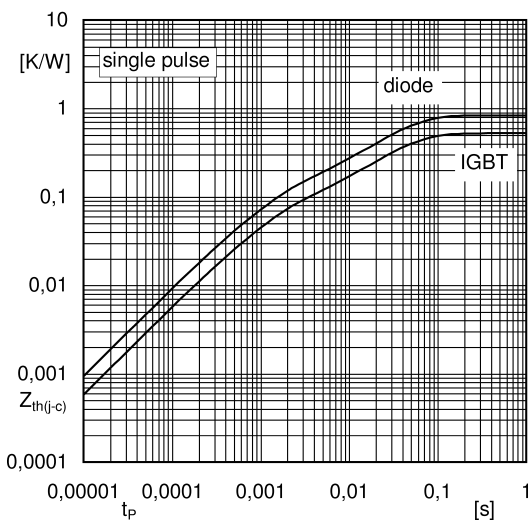


Fig. 9: Transient thermal impedance

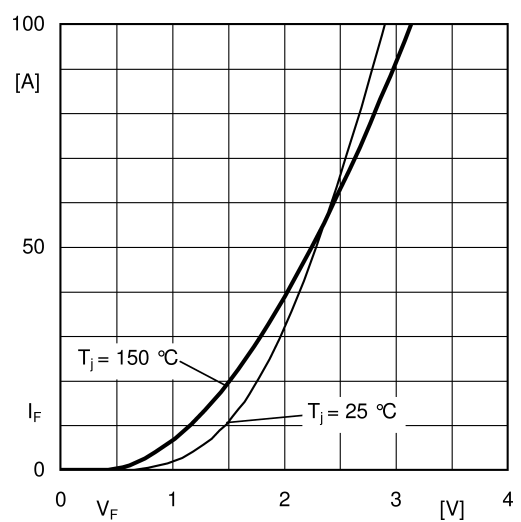


Fig. 10: Typ. CAL diode forward charact., incl.  $R_{CC}'+EE'$

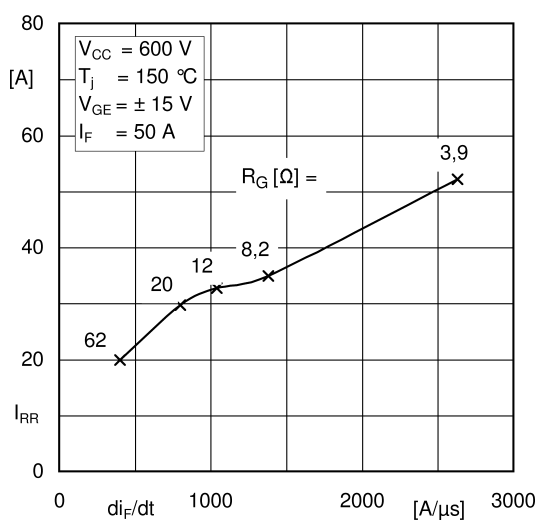


Fig. 11: CAL diode peak reverse recovery current



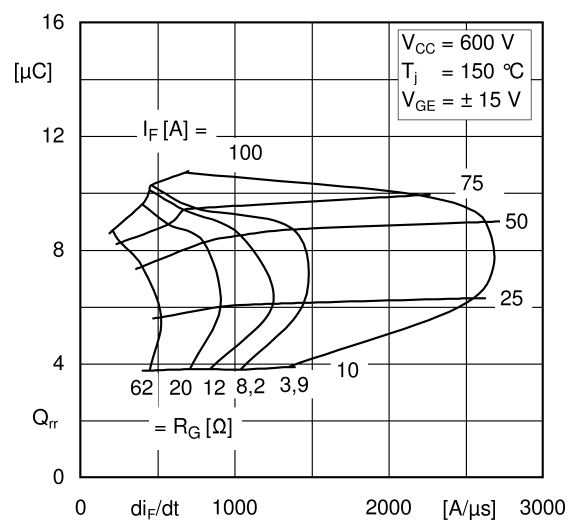


Fig. 12: Typ. CAL diode peak reverse recovery charge

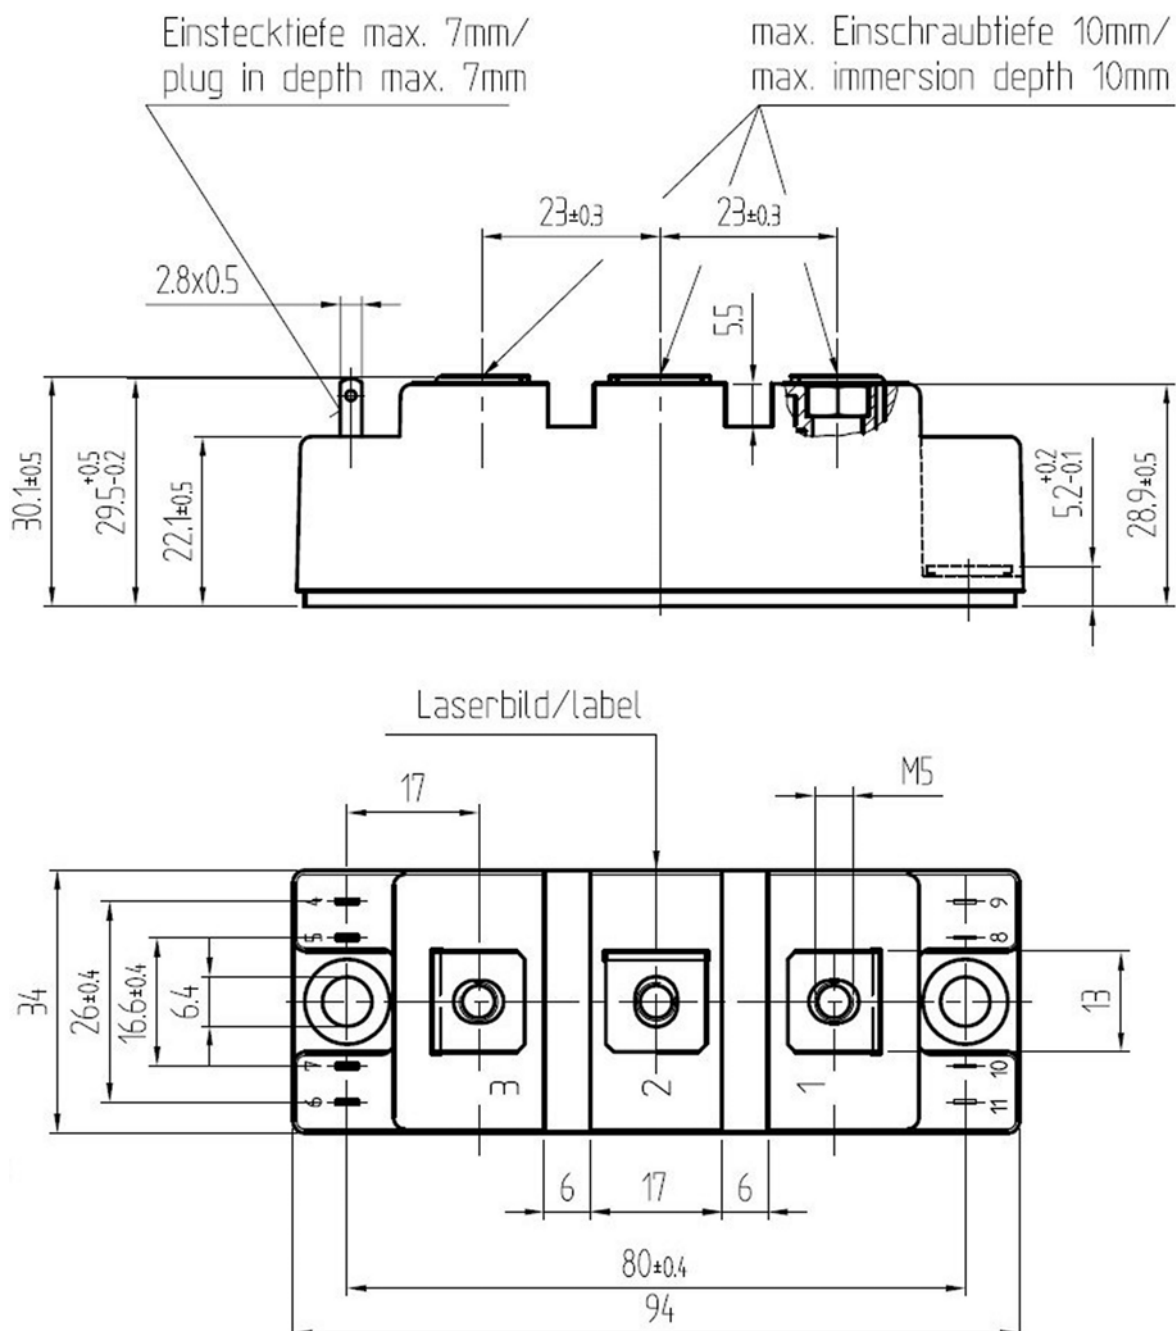

SEMITRANS 2

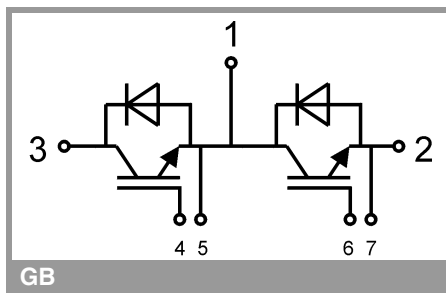

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.