


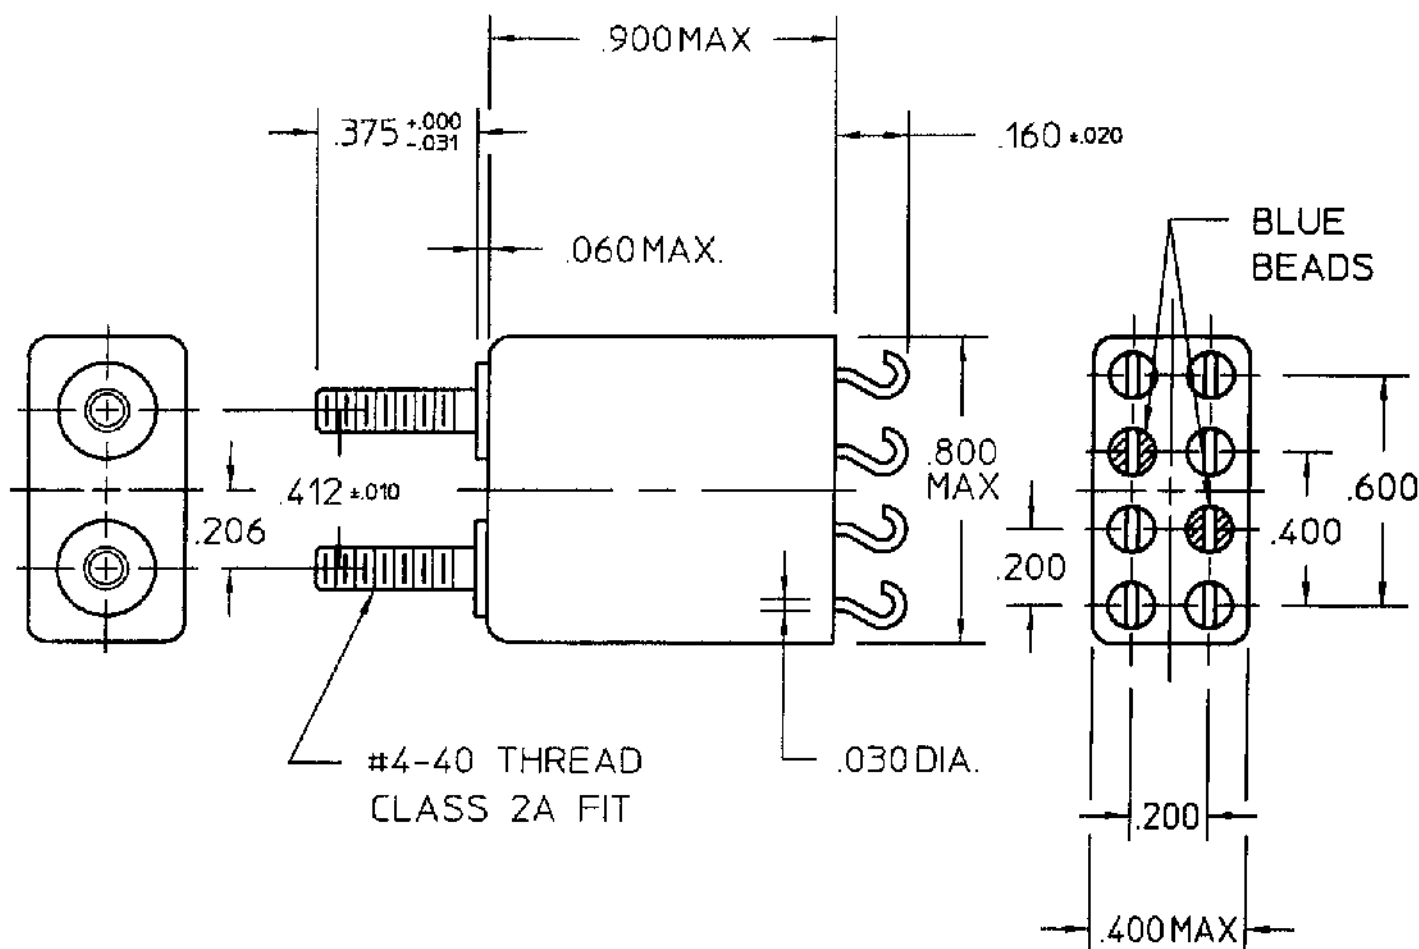

REV. 0
DCO 16604

COIL: @ 25°C
RESISTANCE 600 OHMS $\pm 10\%$
NOMINAL VOLTAGE 26.5 VDC
MUST OPERATE 13.5 VDC
MUST RELEASE 8.5 VDC MAX., 2.7 VDC MIN.

ENVIRONMENT:


VIBRATION 55 CPS TO 3000 CPS @ 30 g's
SHOCK 90 g's 11 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 5 MS MAX.

RELEASE TIME 4 MS MAX.

CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

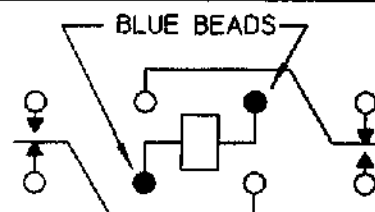

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
5 AMPS 30 VDC RESISTIVE
100,000 OPERATIONS

DR. B.D. 11/7/00 CK.TLG 11-7-00

CHN Technologies
advanced control electronics solutions

CUST. GENICOM
CUST. NO. 3SBK5112H1 REV.

FW5A RELAY

FW5A1102S08