


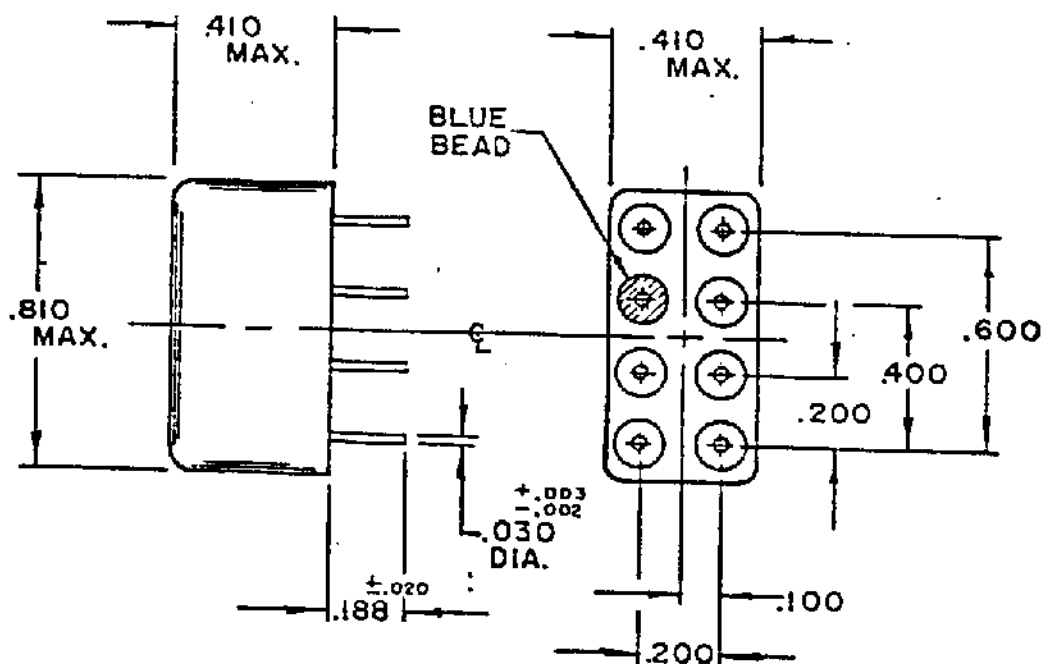

COIL: @ +25°C

RESISTANCE 47 OHMS $\pm 10\%$

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 2.2 VDC

MUST RELEASE 0.2 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2500 CPS AT 20 g's

SHOCK 50 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

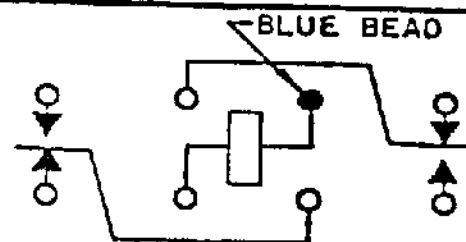

CONTACT RATING: Low Level
2 AMPS, 28 VDC 100,000
Operations

DR. 3-31-86

CK. J. Brooks



Communications
Instruments, Inc.

CUST. C// STANDARD

CUST. NO. _____

TYPE HMS RELAY

HMS 1201S001