


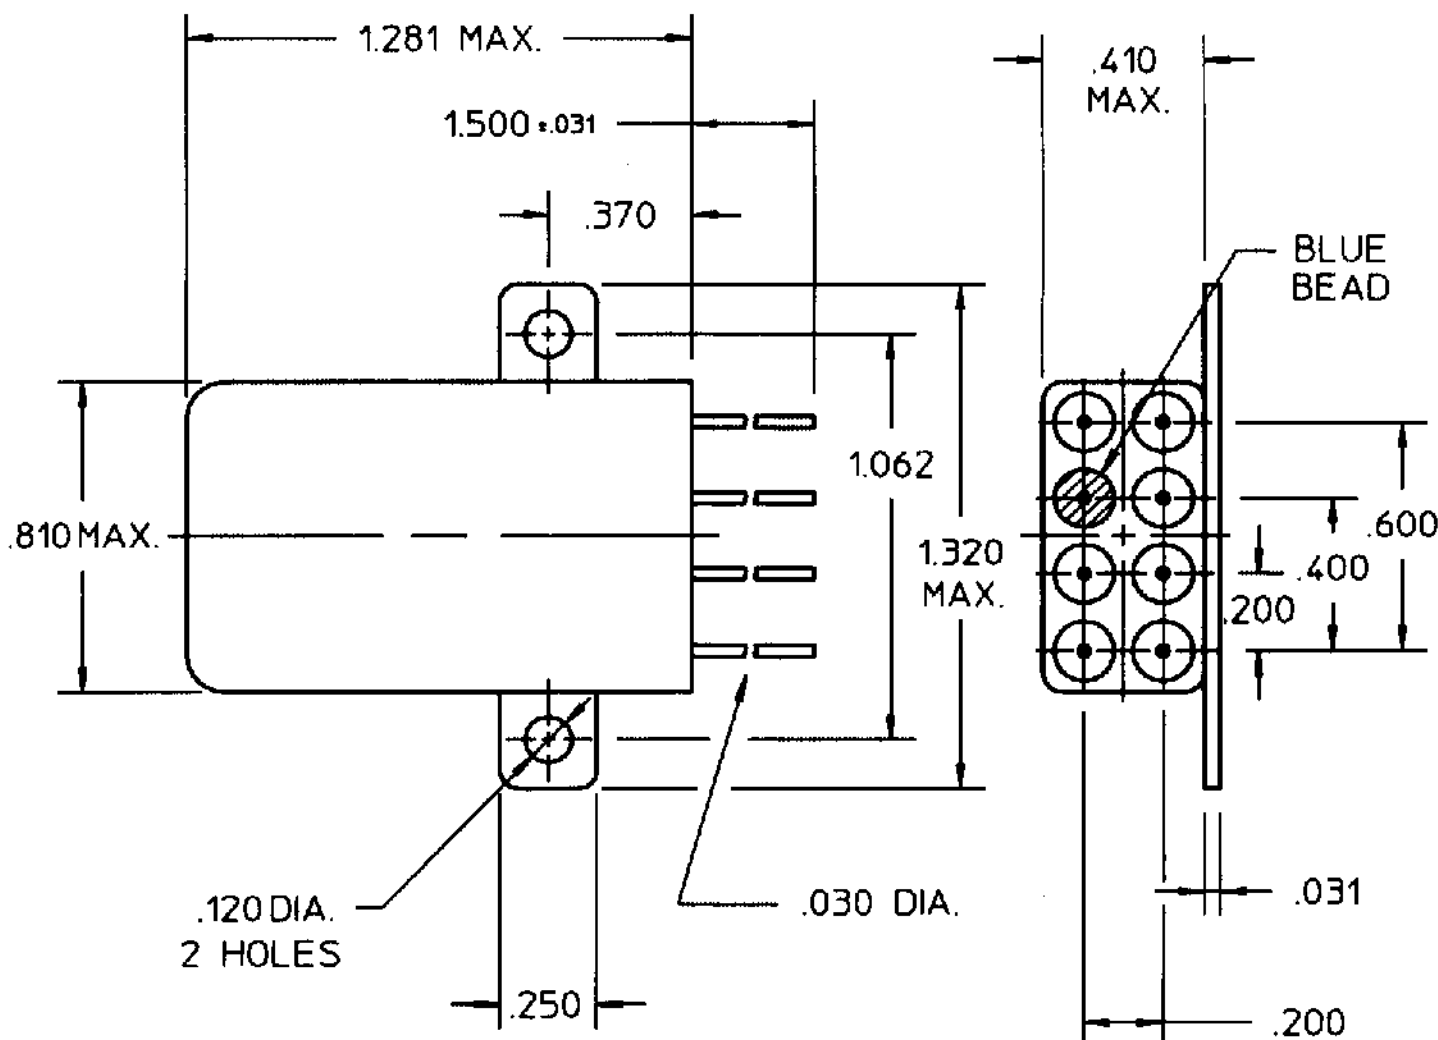

COIL: @ 25°C

RESISTANCE 2500 OHMS ± 10%

NOMINAL VOLTAGE 28.0 VDC

MUST OPERATE 5.6 mADC

MUST RELEASE 0.6 mADC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 15 MS MAX.

RELEASE TIME 4 MS MAX.

CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

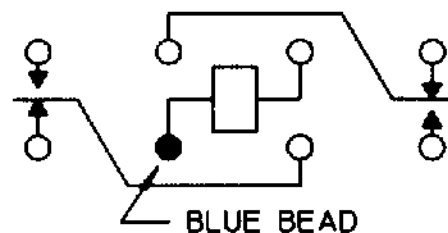

CONTACT RATING: 5A 30 VDC
3A 115 VAC 400 HZ RESISTIVE
100,000 OPERATIONS

DR. R.B. 3/25/93

CK. 3/25/93



COMMUNICATIONS
INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 2BCN-4B-128

TYPE SF5A RELAY

SF5A5337J01