


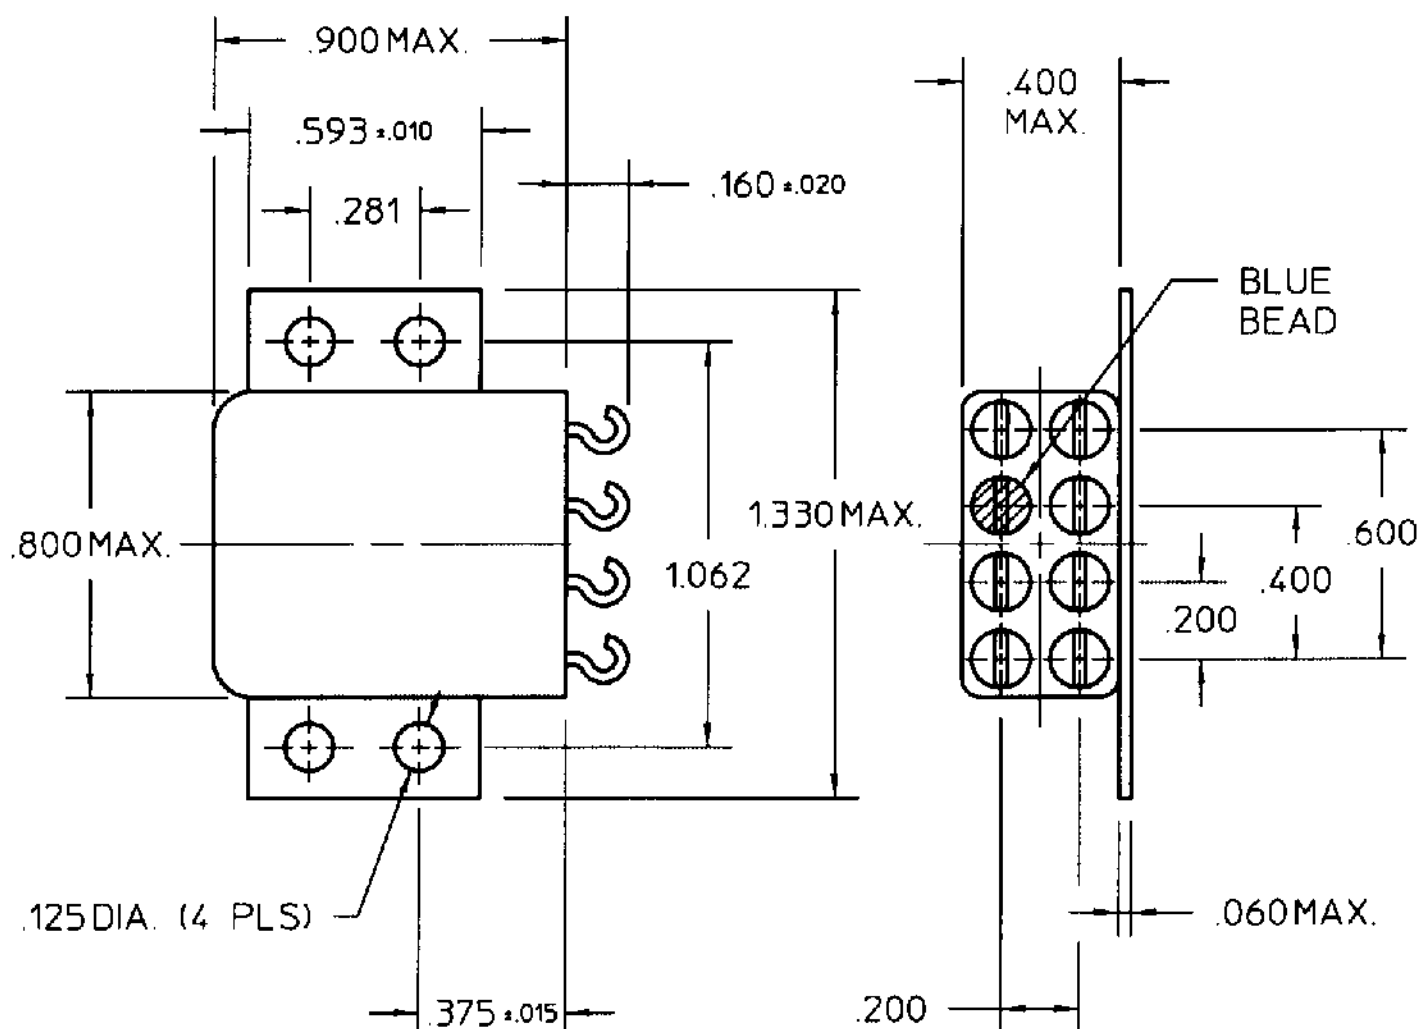

COIL: @ 25°C
 RESISTANCE 1600 OHMS ± 10%
 NOMINAL VOLTAGE 35.0-50.0 VDC
 MUST OPERATE 24.0 VDC
 MUST RELEASE 15.0 VDC MAX. 4.7 VDC MIN.


ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 30 g's
 SHOCK 100 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 5 MS MAX.
 RELEASE 4 MS MAX.
 BOUNCE 2.5 MS MAX.

CUST. GENICOM
 CUST. NO. 3SAF5062N1

TYPE "FW" RELAY

CUSTOMER DATA SHEET

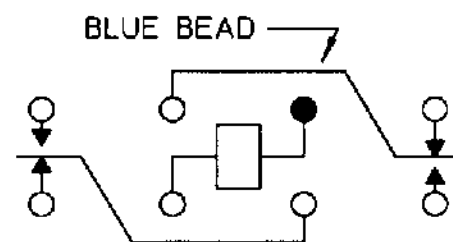

CONTACT RATING: LOW LEVEL TO 2 AMPS
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/9/97 CK 5/20/97

COMMUNICATIONS
 INSTRUMENTS, INC.

FW11133S02