
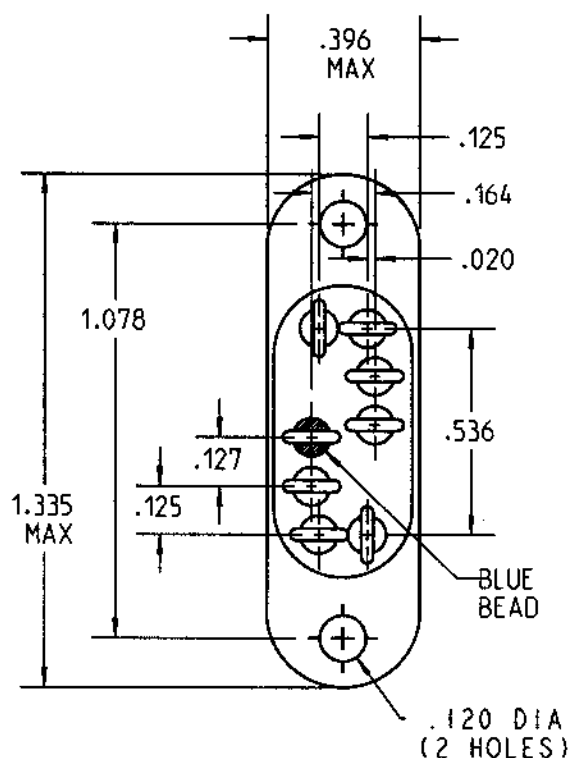


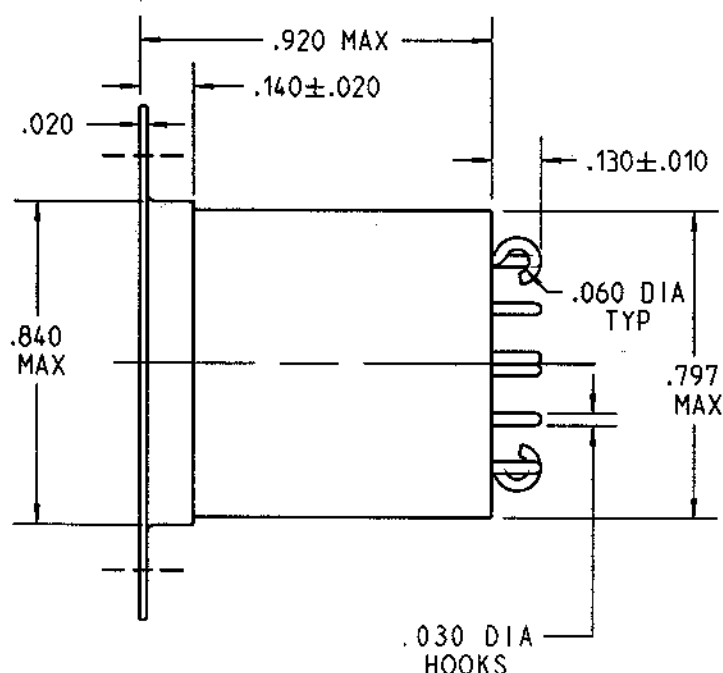

REV. 0

DCO 170674

COIL: @ 25°C

RESISTANCE 552 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 7.0 VDC MAX. 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 2000 Hz @ 20 g's


SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX.

RELEASE 5 MS MAX. BOUNCE 2.5 MS

# CUSTOMER DATA SHEET

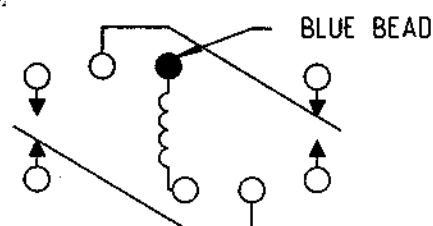

TERMINAL VIEW

CONTACT RATING: 2 AMPS 28 VDC/115 VAC  
RESISTIVE 100,000 OPERATIONS

DR. ASB 21 AUG 02

CK. 3/21/02 AB

**CII Technologies**  
advanced control electronic solutions

CUST. GE

CUST. NO. 3S2791G200AN9

REV. --

3SAE RELAY

3SAE2233A2