

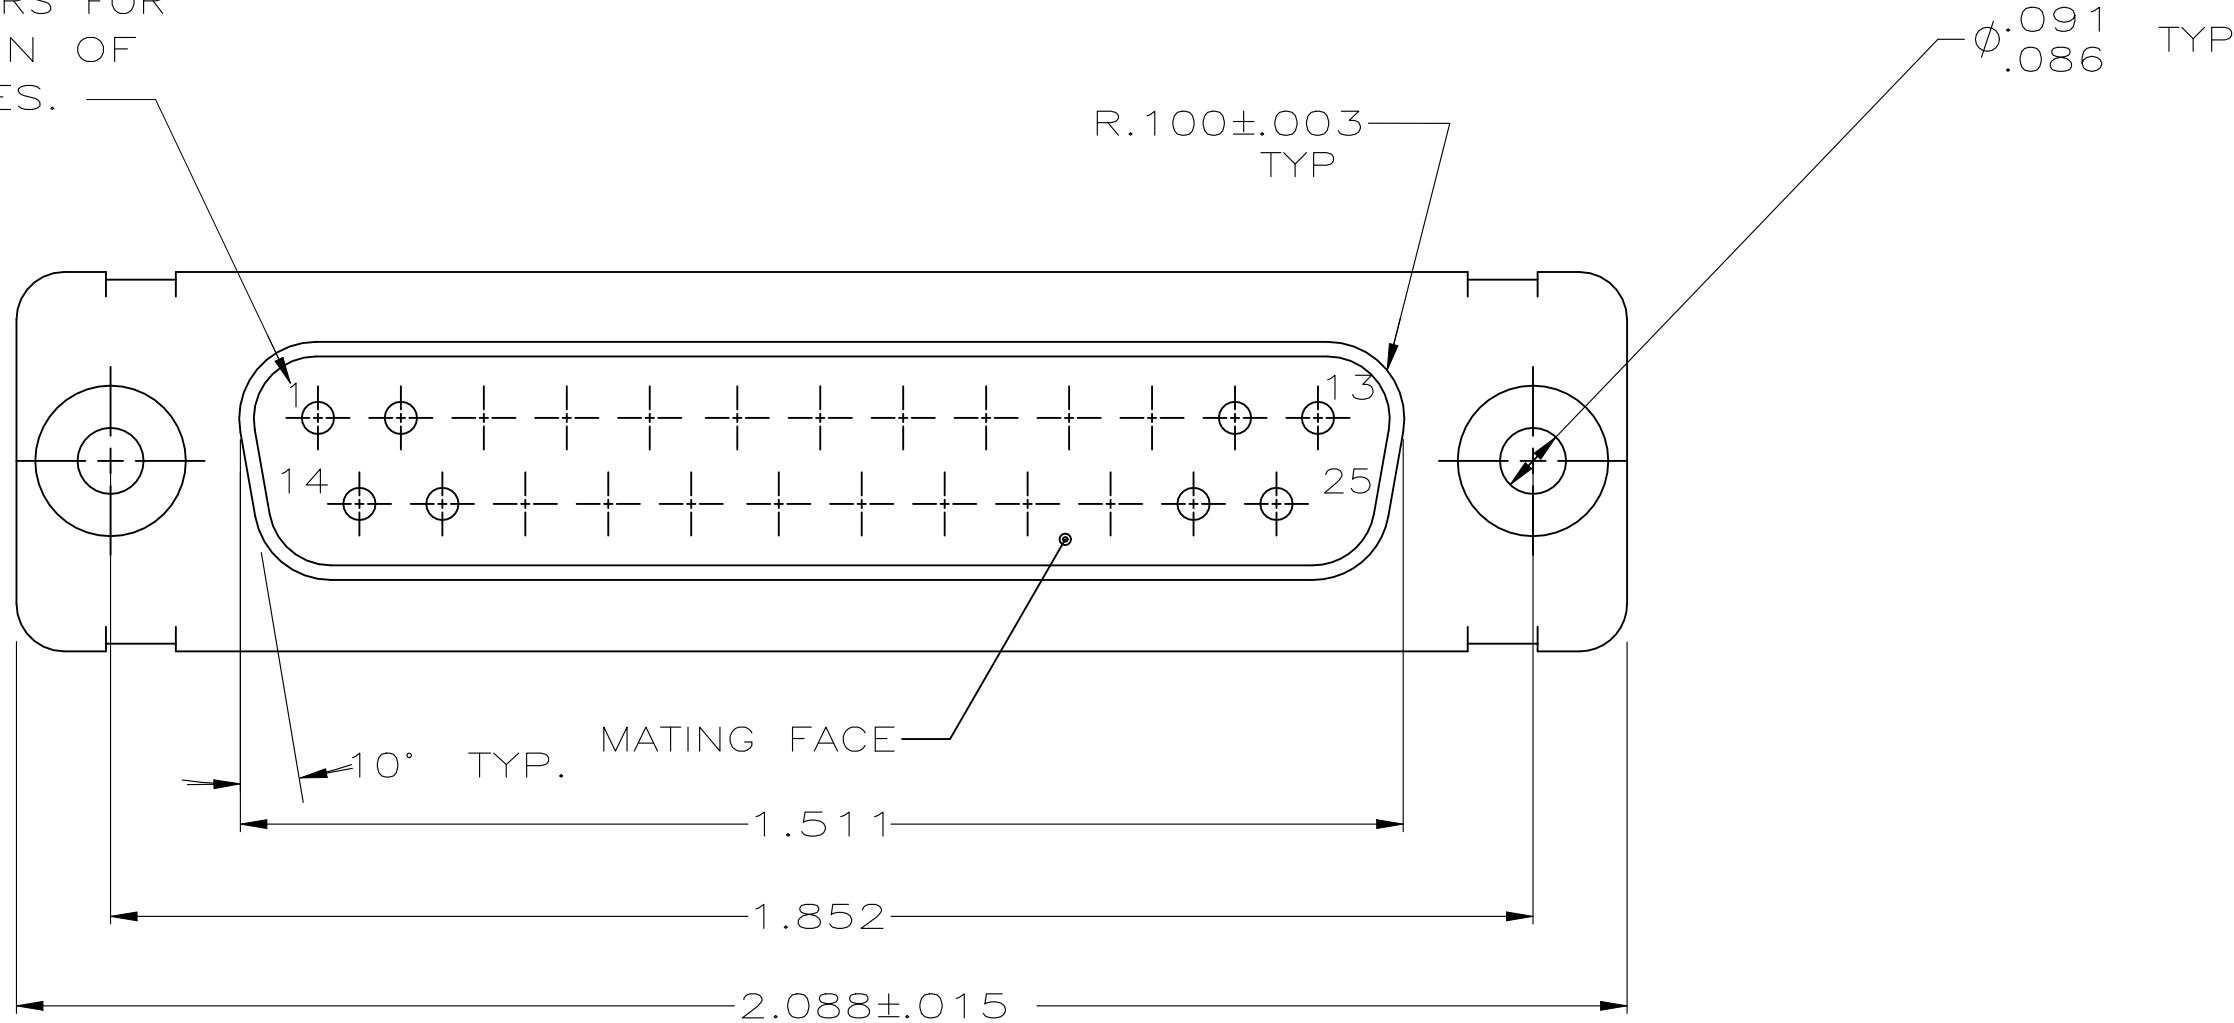
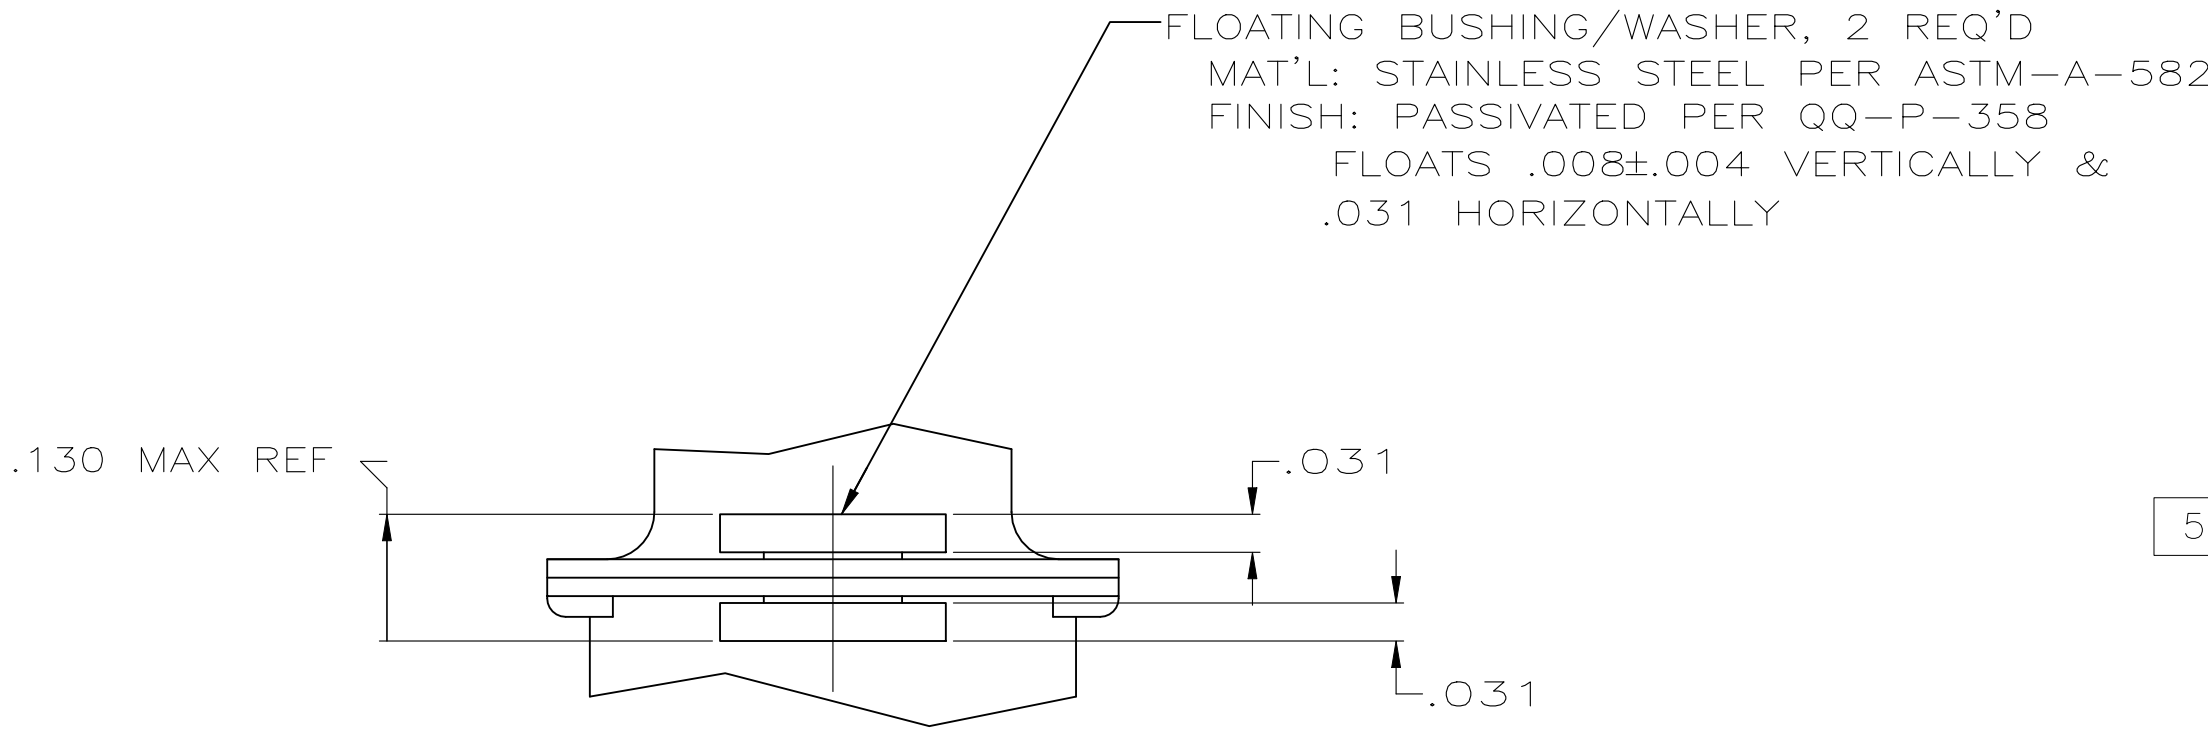


RAISED NUMBERS FOR IDENTIFICATION OF CIRCUIT HOLES.

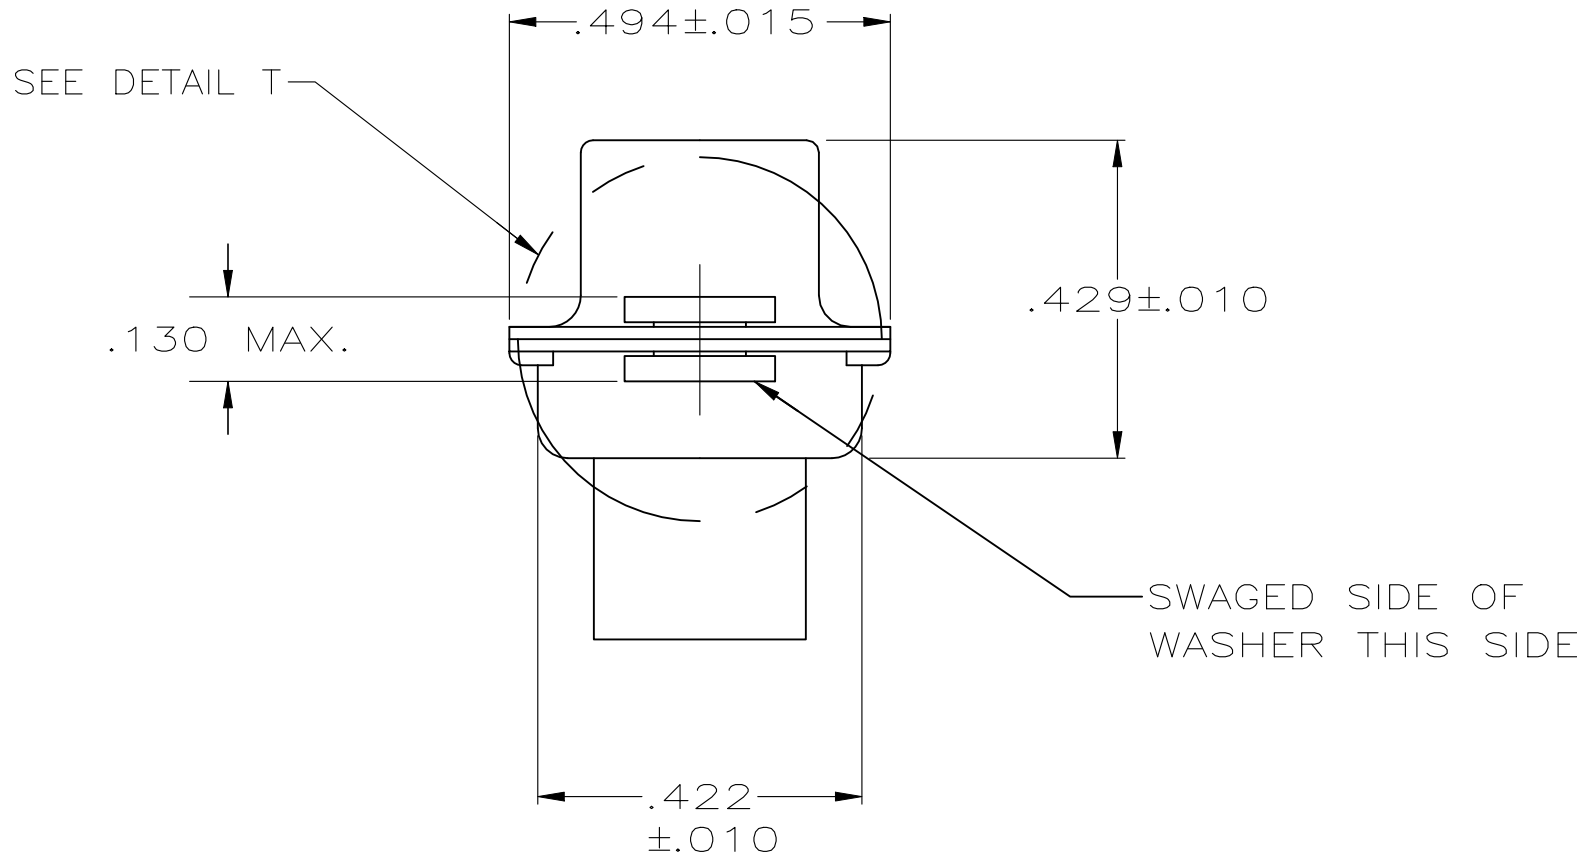

1. MAXIMUM WIRE INSULATION TO BE USED WITH THIS PLUG IS .068 DIA.
2. STAINLESS STEEL RETENTION CLIPS ARE INCLUDED IN INSERTS.
3. THIS PLUG WILL ACCEPT SIZE 20 PIN CONTACT M39029/64-369 OR AMP PART NUMBER 205089-1.
4. FINISH: CADMIUM PER QQ-P-416
5. FINISH: ZINC PLATED PER ASTM-B-633, .000200-.000400 THK WITH SUPPLEMENTARY CHROMATE (Cr3+)

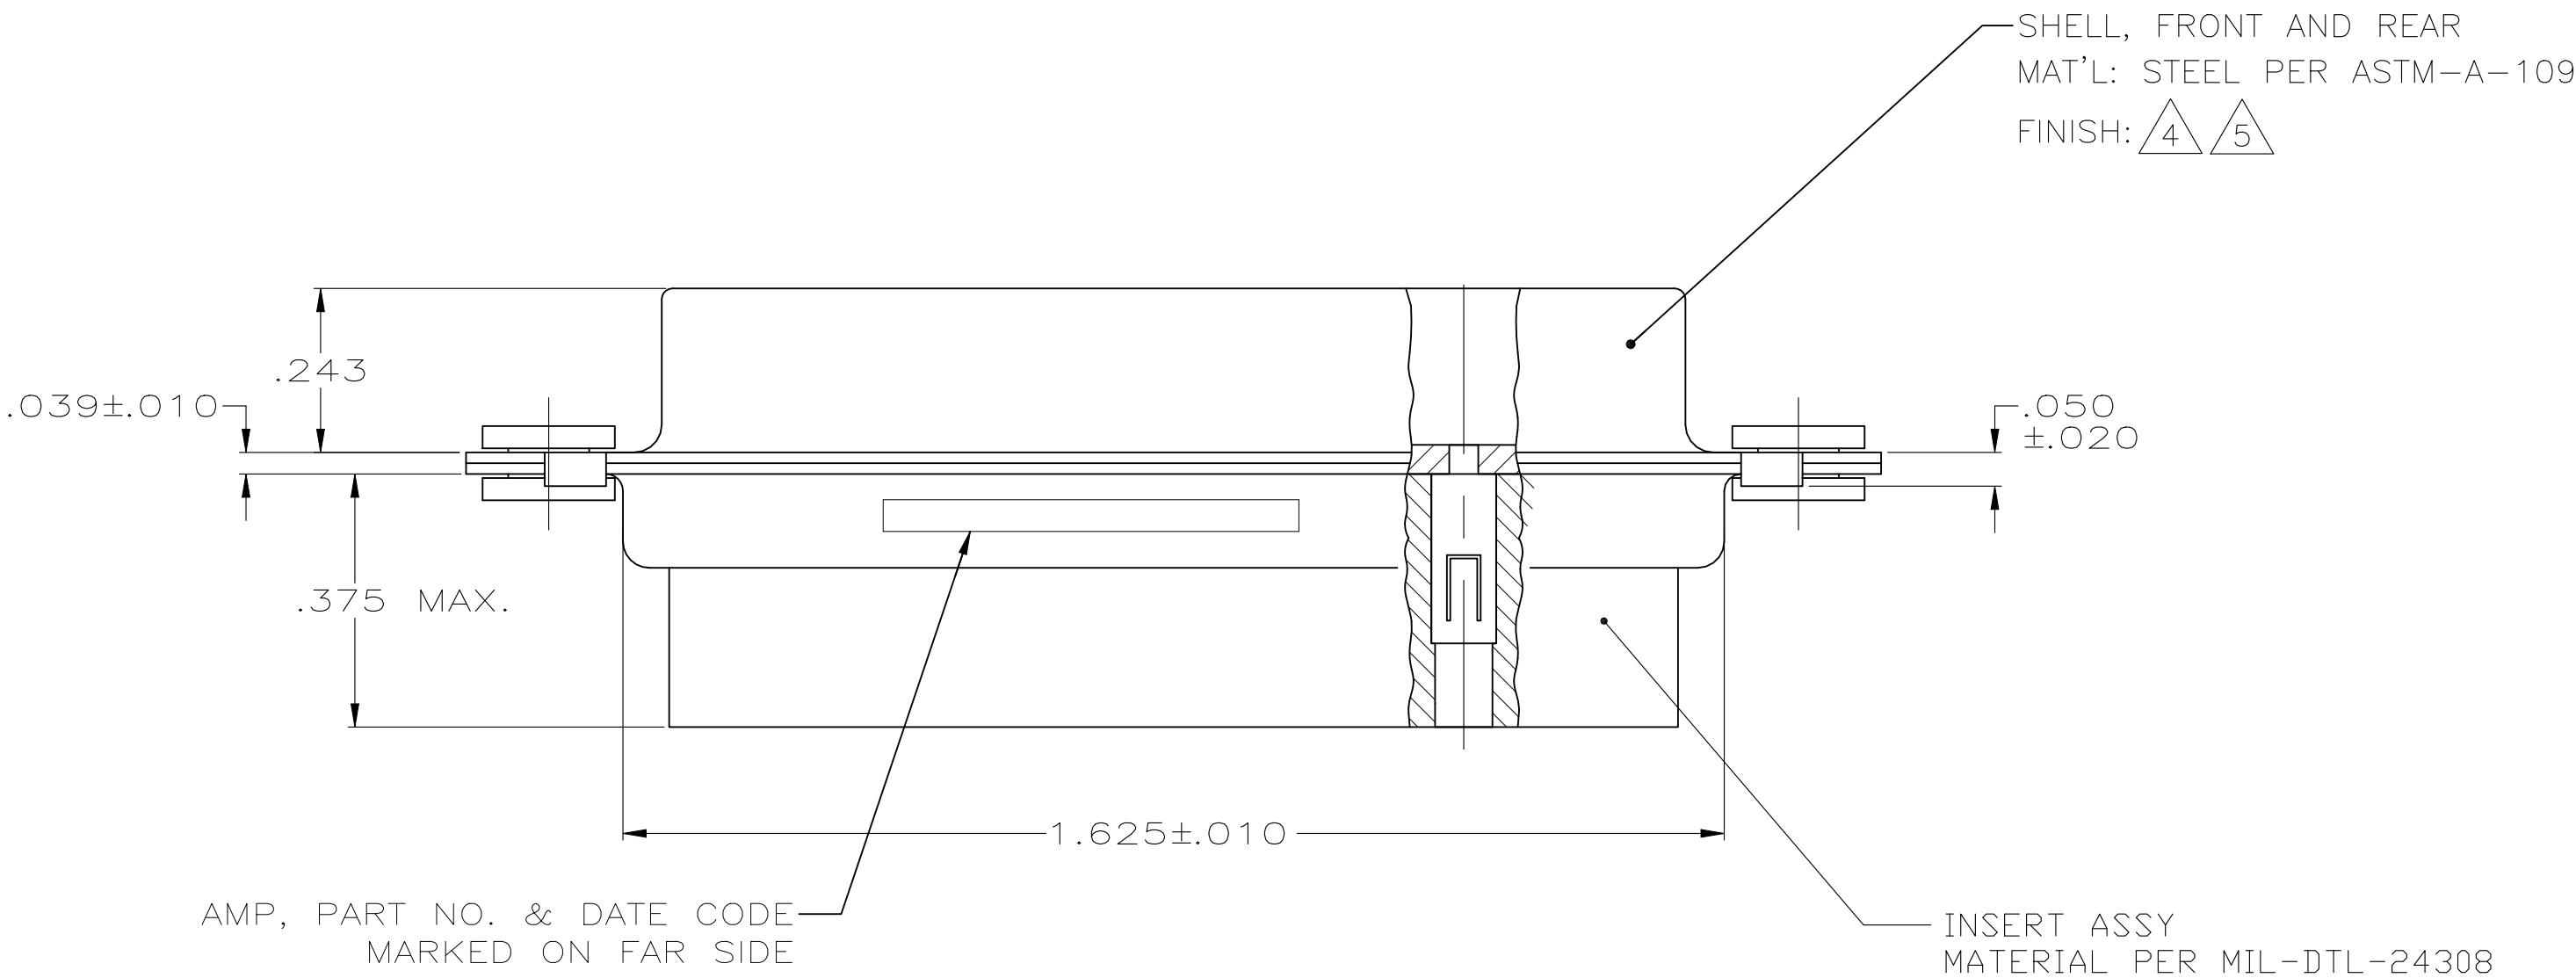

5-1484951-1 OBSOLETE	PLATED PER 5	5-1484951-1
	PLATED PER 4	1484951-1
DESCRIPTION		PART NUMBER

WARNING - THIS DOCUMENT CONTAINS TECHNOLOGY WHOSE EXPORT IS RESTRICTED BY THE EXPORT ADMINISTRATION REGULATIONS ("EAR") PURSUANT TO 15 C.F.R. PARTS 730-774. VIOLATIONS OF THE EAR ARE SUBJECT TO SEVERE CRIMINAL PENALTIES UNDER THE EXPORT CONTROL REFORM ACT, AS AMENDED (TITLE 50, U.S.C., SEC. 4801, ET SEQ.).

DETAIL T
SCALE 6:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 8-28-02	TE Connectivity	
DIMENSIONS: INCHES		CHK D.MILLER 8-28-02		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D.MILLER 8-28-02	NAME	
0. PLC ± .005		PRODUCT SPEC	RCPT. ASSEMBLY,AMPLIMITE 25 POSN,SIZE 3, SERIES 109 BLINDMATE, REVERSE GENDER	
1. PLC ± .005		APPLICATION SPEC		
2. PLC ± .005		WEIGHT	SIZE	CAGE CODE
3. PLC ± .005		—	A1	00779
4. PLC ± .005		—	1484951	—
5. PLC ± .005		—	—	—
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS	CUSTOMER DRAWING	
SCALE 4:1		SHEET 1 OF 1	REV C	