


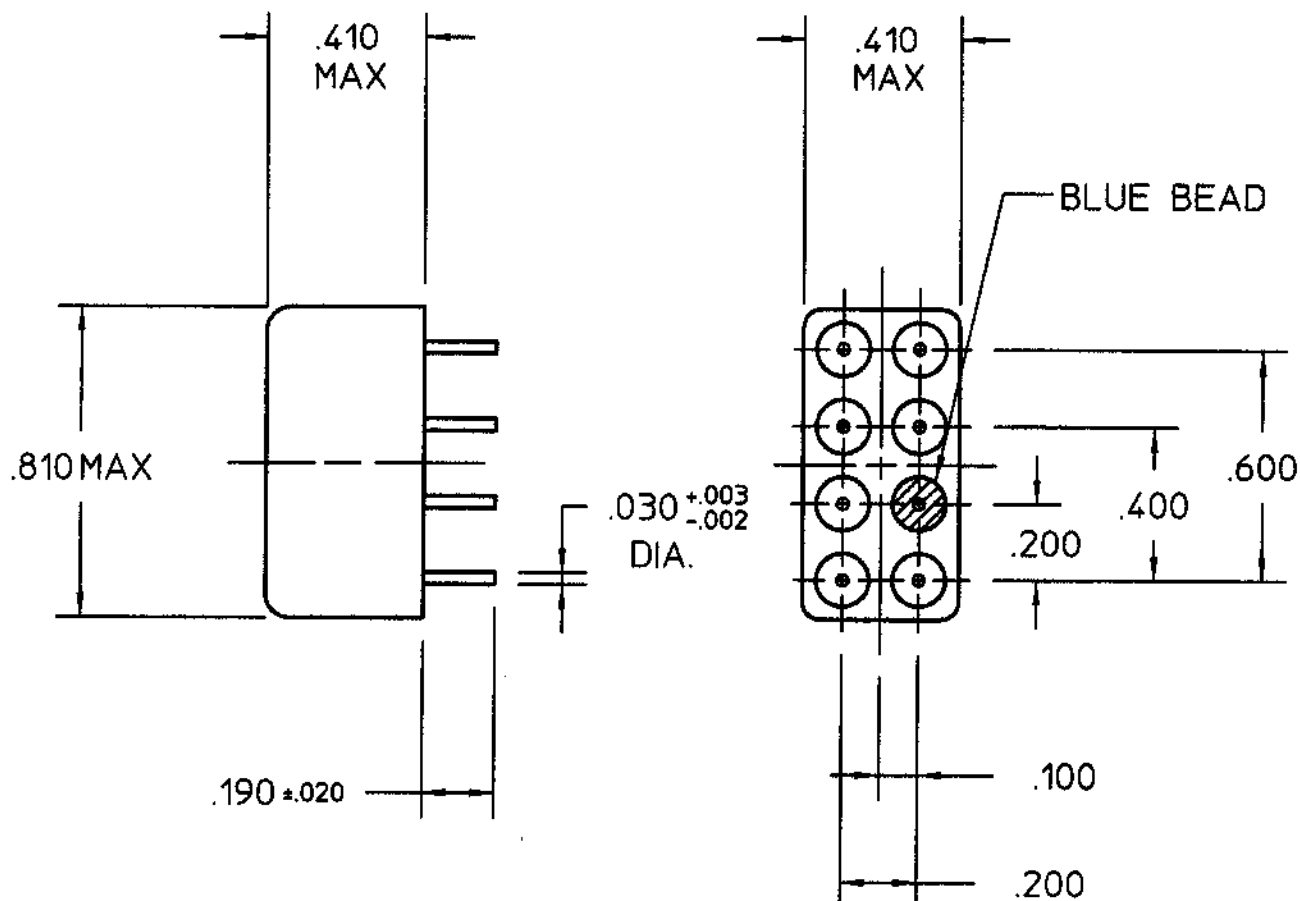

REV. 0

DCO 16858

COIL: @ 25°C
 RESISTANCE 700 OHMS ±10%
 NOMINAL VOLTAGE 25.0 VDC
 MUST OPERATE 15.5 VDC
 MUST RELEASE 10.9 MAX., 1.7 MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 10 g's

SHOCK 50 g's 6 MS. DURATION


TEMPERATURE -14 °C TO +125 °C

NOTES: OPERATE 6 MS MAX

RELEASE 4 MS MAX

CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

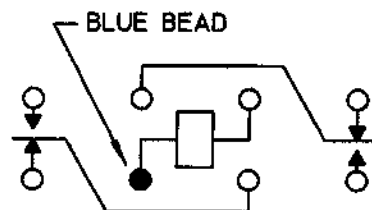

TERMINAL VIEW

CONTACT RATING: 50 µA @ 50 mV PEAK
 AC OR DC 100,000,000 OPERATIONS
 2 AMPS 28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 3/7/01

CK. TLG 03-07-01

CII Technologies
 advanced control electronic solutions

CUST. C. I. I. STD.

CUST. NO. REV.

"3SCV" RELAY

3SCV5004H1