
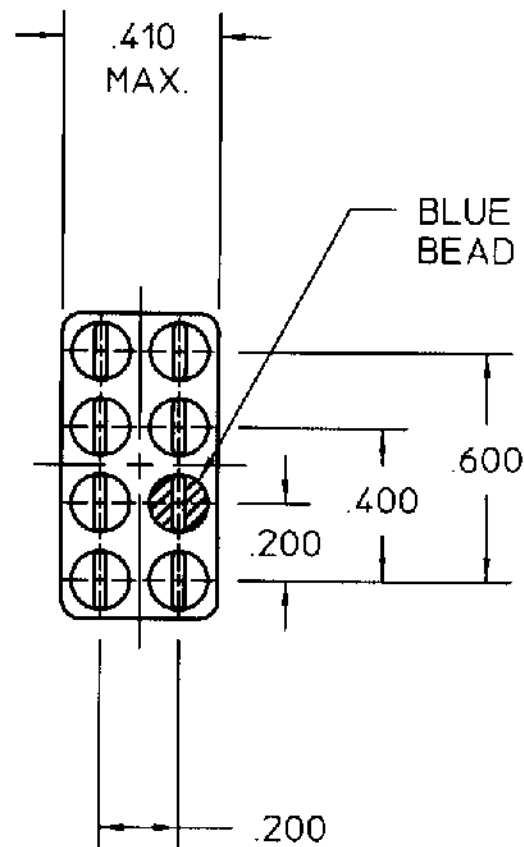


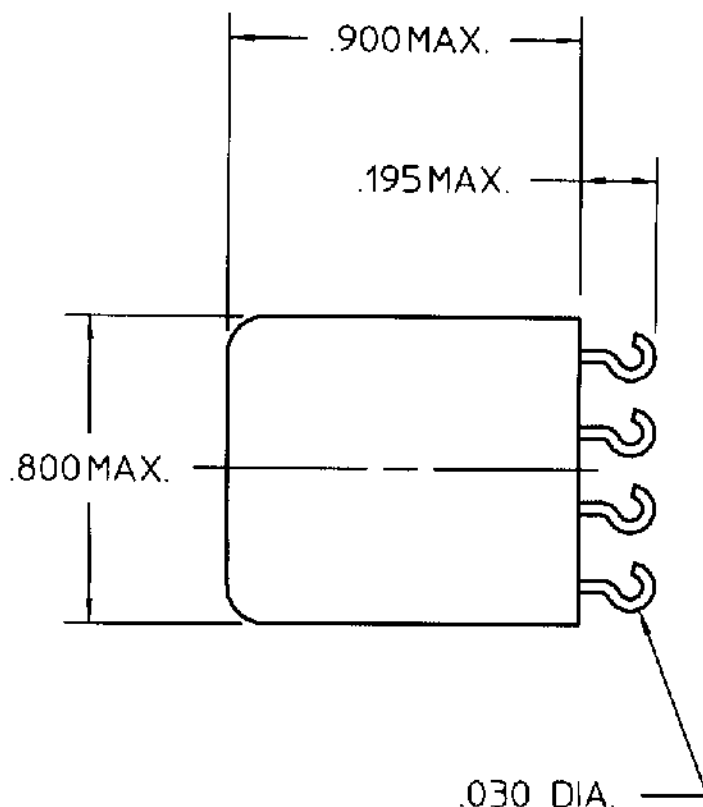

REV. 0

DCO 15769


COIL: @ 25°C
 RESISTANCE 600 OHMS ±10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.0 VDC
 MUST RELEASE 1.5 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6.0 MS MAX
 RELEASE 4 MS MAX
 CONTACT BOUNCE 3.0 MS MAX

CUSTOMER DATA SHEET

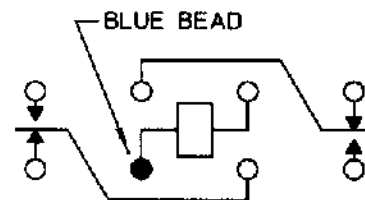

TERMINAL VIEW

CONTACT RATING: 5 AMPS 28 VDC
 RESISTIVE 100,000 OPERATIONS

DR. B.D. 8/5/99 CK. GAH 8/5/99

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. HI-G
 CUST. NO. 2BN-1A-126 REV.

FW5A RELAY

FW5A1101S06